Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Aigostar 7539905699

Aigostar Coffee Grinder Electric User Manual

Model: 7539905699

1. Important Safety Information

Please read all instructions carefully before using this appliance. Keep this manual for future reference.

- Ensure the voltage of your power outlet matches the voltage specified on the appliance.
- Do not immerse the motor base in water or any other liquid. Only the removable grinding bowl and lid are washable.
- Always unplug the appliance from the power outlet before cleaning, assembling, or disassembling parts.
- Keep hands and utensils out of the grinding chamber during operation to prevent injury.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- Do not operate the appliance with a damaged cord or plug, or after the appliance malfunctions or has been dropped or damaged in any manner.
- Avoid contact with moving parts.
- Do not use outdoors.
- Do not let the cord hang over the edge of a table or counter, or touch hot surfaces.
- This appliance is for household use only.

2. Product Overview

The Aigostar Electric Coffee Grinder is designed for efficient grinding of coffee beans, spices, nuts, and herbs. It features a powerful motor and durable stainless steel blades.



Figure 2.1: Aigostar Electric Coffee Grinder with accessories.

Key Components:

- **Transparent Lid:** Allows observation of the grinding process and can be used as a measuring cup.
- **Grinding Bowl:** Stainless steel, removable for easy cleaning.
- **Stainless Steel Blades:** Durable and efficient for various ingredients.
- **Motor Base:** Contains the 150-watt motor and one-touch operation button.
- **Power Cord:** With integrated cord storage for convenience.
- **Cleaning Brush:** Included for maintenance.



Figure 2.2: Internal components and features of the grinder.



Figure 2.3: The transparent lid doubles as a measuring cup.

3. Setup

1. **Unpack:** Carefully remove all components from the packaging. Retain packaging for future storage or transport.
2. **Clean:** Before first use, clean the removable grinding bowl and lid with warm soapy water. Rinse thoroughly and dry completely. Wipe the motor base with a damp cloth. Do not immerse the motor base in water.
3. **Assemble:** Place the dry grinding bowl into the motor base. Ensure it is securely seated.
4. **Position:** Place the grinder on a stable, flat, and dry surface.

4. Operating Instructions

4.1 Grinding Coffee Beans:

1. **Add Beans:** Fill the grinding bowl with the desired amount of coffee beans. The maximum capacity is 60g (approximately 12 cups of coffee). Do not overfill.
2. **Secure Lid:** Place the transparent lid onto the grinding bowl. Ensure it is properly aligned and locked into place. The grinder features a lid-activated safety switch, meaning it will not operate unless the lid is correctly secured.

3. **Plug In:** Plug the power cord into a standard 120V AC electrical outlet.
4. **Grind:** Press and hold the one-touch operation button on the front of the grinder. The grinding process will begin.
5. **Monitor Grinding:** Observe the coffee through the transparent lid. Release the button once the desired fineness is achieved.
    - **Coarse (French Press):** 5-10 seconds
    - **Medium (Drip Coffee):** 10-15 seconds
    - **Fine (Espresso):** 15-20 seconds

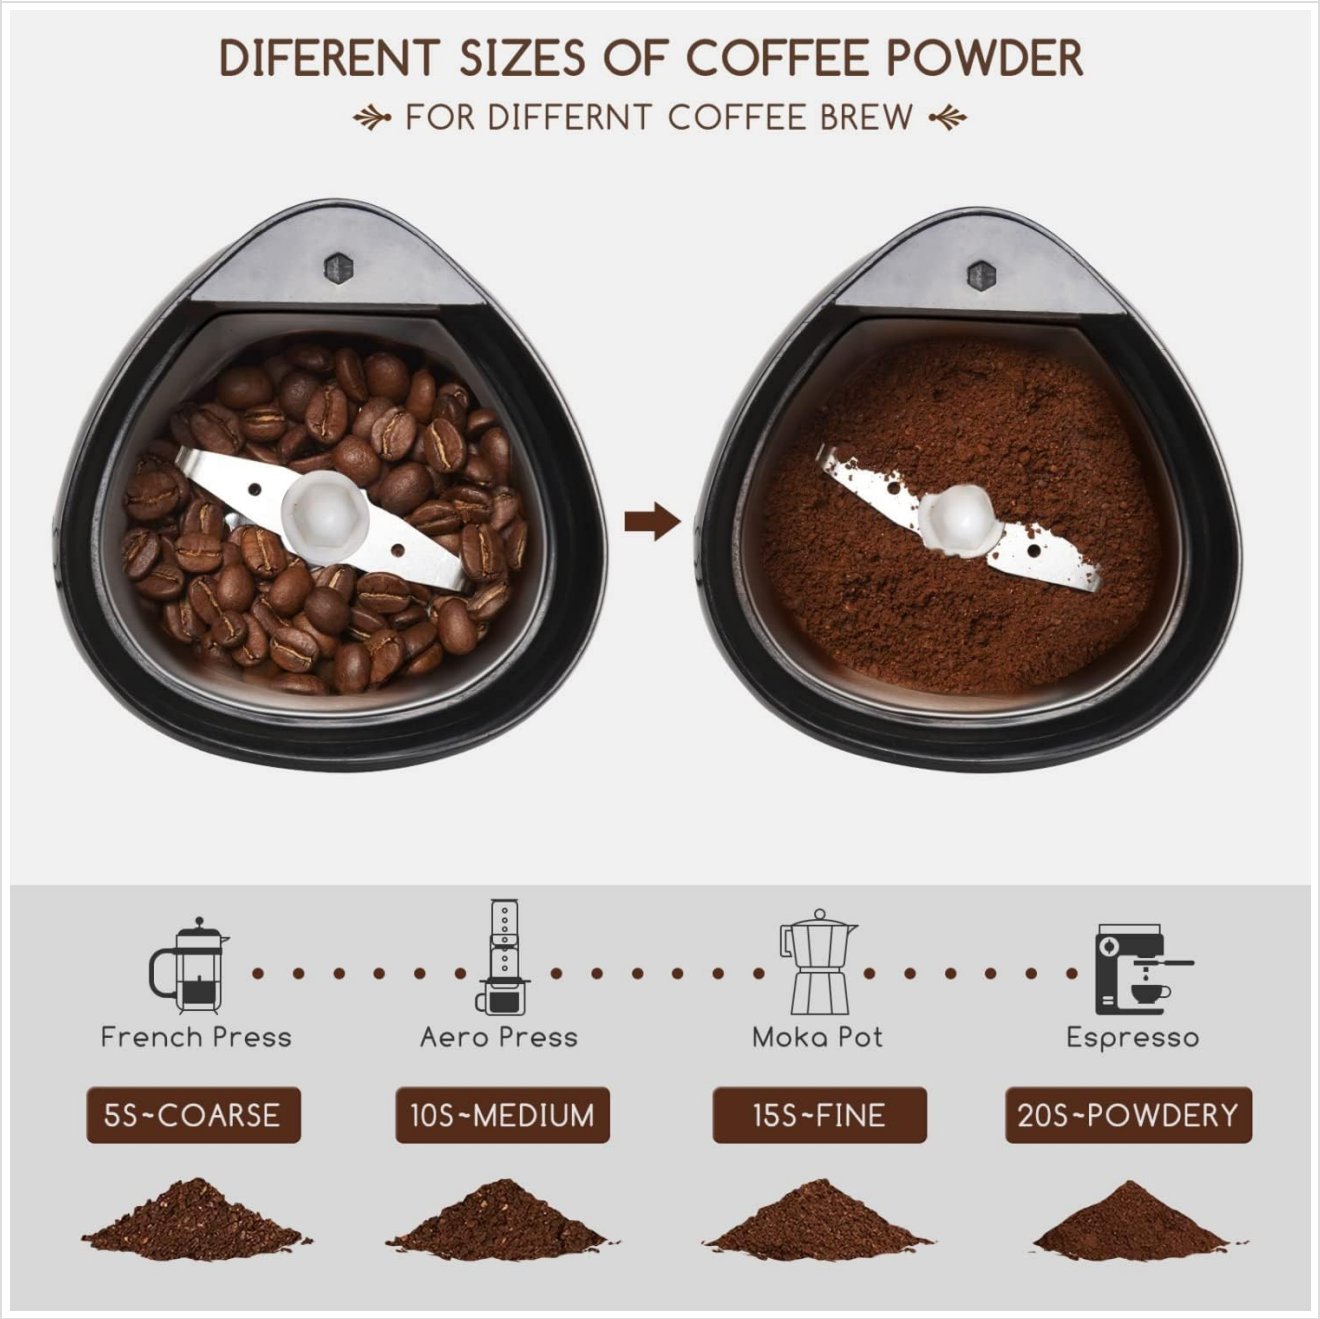


Figure 4.1: Grinding time guidelines for various coffee preparations.

6. **Unplug and Remove:** Once grinding is complete, unplug the grinder. Carefully remove the lid, then lift out the grinding bowl.
7. **Serve:** Pour the freshly ground coffee into your brewing device.

4.2 Grinding Spices, Nuts, and Herbs:

This grinder is versatile and can be used for various dry ingredients. Follow the same steps as for coffee beans, adjusting grinding time based on the desired consistency.



Figure 4.2: The grinder can process a variety of dry ingredients.

4.3 Official Product Video:

Video 4.1: Demonstrates the features and operation of the Aigostar Removable Bowl Coffee Grinder, including its powerful motor, capacity, ease of use, and versatility for grinding various ingredients.

5. Maintenance and Cleaning

Regular cleaning ensures optimal performance and extends the life of your grinder.

1. **Unplug:** Always unplug the grinder from the power outlet before cleaning.
2. **Remove Grinding Bowl:** Lift the grinding bowl out of the motor base.
3. **Empty Contents:** Discard any remaining ground material from the bowl.
4. **Clean Bowl and Lid:** Wash the removable stainless steel grinding bowl and transparent lid with warm, soapy water. Rinse thoroughly and dry completely with a soft cloth. Ensure no water enters the motor base.

5. **Clean Motor Base:** Wipe the exterior of the motor base with a damp cloth. For stubborn residue in the motor base cavity, use the included cleaning brush to remove particles. Do not immerse the motor base in water.
6. **Reassemble:** Once all parts are dry, reassemble the grinding bowl and lid onto the motor base.



Figure 5.1: Use the included brush for easy cleaning of the grinding chamber.

6. Troubleshooting

Problem	Possible Cause	Solution
Grinder does not turn on.	Not plugged in; Lid not properly secured; Power outage.	Ensure the power cord is securely plugged into a working outlet. Check that the transparent lid is correctly placed and locked. Verify power supply.
Grinding is inconsistent.	Overfilling the grinding bowl; Insufficient grinding time.	Do not exceed the maximum fill line (60g). Increase grinding time for finer results. Ensure ingredients are dry.
Motor sounds strained.	Overfilling; Grinding hard ingredients; Blades are obstructed.	Reduce the amount of ingredients. Avoid grinding extremely hard items. Unplug and check for any obstructions around the blades.
Ground material splashes out.	Lid not properly sealed.	Ensure the lid is firmly pressed down and twisted to lock into place. The grinder has a sealing ring design to prevent splash.

7. Specifications

- **Brand:** Aigostar
- **Model Number:** 7539905699
- **Color:** Black
- **Product Dimensions:** 4.02"L x 4.02"W x 6.77"H
- **Item Weight:** 1 pounds
- **Capacity:** 60g / 2oz (up to 12 cups of coffee)
- **Motor Power:** 150 Watts
- **Blades:** Stainless Steel
- **Voltage:** 120 Volts
- **UPC:** 718356204835



Figure 7.1: Product dimensions for easy reference.

8. Warranty and Support

For warranty information or technical support, please refer to the official Aigostar website or contact their customer service directly. Keep your purchase receipt as proof of purchase for any warranty claims.

Online User Manual: A PDF version of the user manual is available for download at: https://manuals.plus/m/242c2480b14337af12c69353b5f3f405129b345fbf7578804160ac907972e439

Aigostar Official Store: Visit the Aigostar Store on Amazon

© 2023 Aigostar. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07G84TNJQ

More documents and user manuals: **https://manuals.plus/**