

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [IRIS OHYAMA](#) /

› [IRIS OHYAMA IC-FAC2-W Lightweight Futon Cleaner Instruction Manual](#)

IRIS OHYAMA IC-FAC2-W

IRIS OHYAMA IC-FAC2-W Lightweight Futon Cleaner Instruction Manual

Model: IC-FAC2-W

1. IMPORTANT SAFETY INSTRUCTIONS

Please read all instructions carefully before using this appliance and retain for future reference.

- Always ensure the power supply matches the voltage specified on the appliance.
- Do not immerse the appliance, cord, or plug in water or other liquids.
- Keep the appliance away from heat sources, direct sunlight, humidity, and sharp edges.
- Do not operate the appliance with a damaged cord or plug. Contact qualified service personnel for repair.
- This appliance is for household use only. Do not use it for commercial purposes.
- Unplug the appliance from the power outlet when not in use, before cleaning, or before performing any maintenance.
- Keep children and pets away from the appliance during operation.
- Do not vacuum liquids, hot ashes, sharp objects, or flammable/explosive materials.

2. PRODUCT OVERVIEW

The IRIS OHYAMA IC-FAC2-W is a lightweight and powerful futon cleaner designed to effectively remove dust mites and allergens from bedding. It features a high-sensitivity dust mite sensor, a warm air function, and a unique Cyclone Stream Head for superior suction.

Key Features:

- **Lightweight Design:** Weighs approximately 1.6 kg for easy handling.
- **Dust Mite Sensor:** Detects the amount of dust mites and dust, indicating the level with a color-coded lamp (red for high, yellow for medium, green for low).
- **Tapping Function:** A wide tapping pad vibrates approximately 6,000 times per minute to dislodge dust mites and debris embedded in fabric fibers.
- **Warm Air Function:** Blows warm air onto the futon simultaneously with suction, creating an environment less conducive for dust mite reproduction.
- **Cyclone Stream Head:** Utilizes vertical and horizontal cyclone airflow to achieve over 98% dust mite removal in 3

minutes (based on internal testing with test dust containing dust mite allergens).

- **Washable Filters:** Dust collection and exhaust filters are washable for easy maintenance and hygiene.
- **Self-Standing Design:** Allows for convenient upright storage without a stand.
- **Movable Head:** The flexible head makes cleaning uneven surfaces like sofas and cushions easier.

	軽量モデル	毛取りヘッド搭載モデル	ハイパワー モデル
商品質量	1.6kg	1.7kg	2.2kg
たたき回数	6,000回	13,000回	14,000回
ダニ・ちり	★	★★	★★★
髪の毛	★	★★★	★★★
特徴	軽量 エントリー モデル	ペットの毛取り にもおすすめ	アイリス オーヤマ史上 最強の吸引力

Image: The IRIS OHYAMA IC-FAC2-W Futon Cleaner, highlighting its compact design and main features like suction, tapping, and warm air.

Included Components:

- Main Unit
- Dust Collection Filter (pre-installed)
- Exhaust Filter (pre-installed)
- Cord Band (pre-installed)

3. SETUP

3.1 Unpacking and Inspection

1. Carefully remove all components from the packaging.
2. Check for any damage that may have occurred during shipping. If any damage is found, do not use the appliance and contact customer support.
3. Ensure all included components are present.

3.2 Power Connection

1. Unwind the power cord completely.
2. Plug the power cord into a standard AC100V (50/60Hz) electrical outlet.
3. Ensure the connection is secure.

4. OPERATING INSTRUCTIONS

Follow these steps for effective cleaning of your futons and bedding.

4.1 Powering On/Off

- To turn on the cleaner, press the power button located on the handle.
- To turn off the cleaner, press the power button again.

4.2 Using the Dust Mite Sensor

高感度ダニ・ちりセンサーでキレイを実感



Image: Visual representation of the dust mite sensor, showing red, yellow, and green indicators for dust levels.

- The cleaner is equipped with a high-sensitivity sensor that detects dust mites and fine dust particles (up to approximately 20μm).
- The indicator lamp on the unit will change color to show the level of dust detected:
 - Red:** High amount of dust/dust mites.
 - Yellow:** Medium amount of dust/dust mites.
 - Green:** Low amount of dust/dust mites, indicating a clean surface.
- Continue cleaning until the indicator consistently shows green for thorough cleaning.

たたきで徹底掃除！

たたき回数
毎分約

6,000回



超ワイドたたきパッド搭載

20cmのパッドにより、広範囲のたたきが可能です。

また、1分間に約6,000回もの高速振動で
繊維の間に潜むダニやちりを浮き上がらせます。

Image: Close-up of the ultra-wide tapping pad, showing its approximately 20cm width and internal mechanism.

吸引と同時に温風でふとんを温め

温風を吹き付ける「温風機能」搭載

吸引と同時に温風でふとんをふくらさせ、ダニが繁殖しにくい環境を作ります。

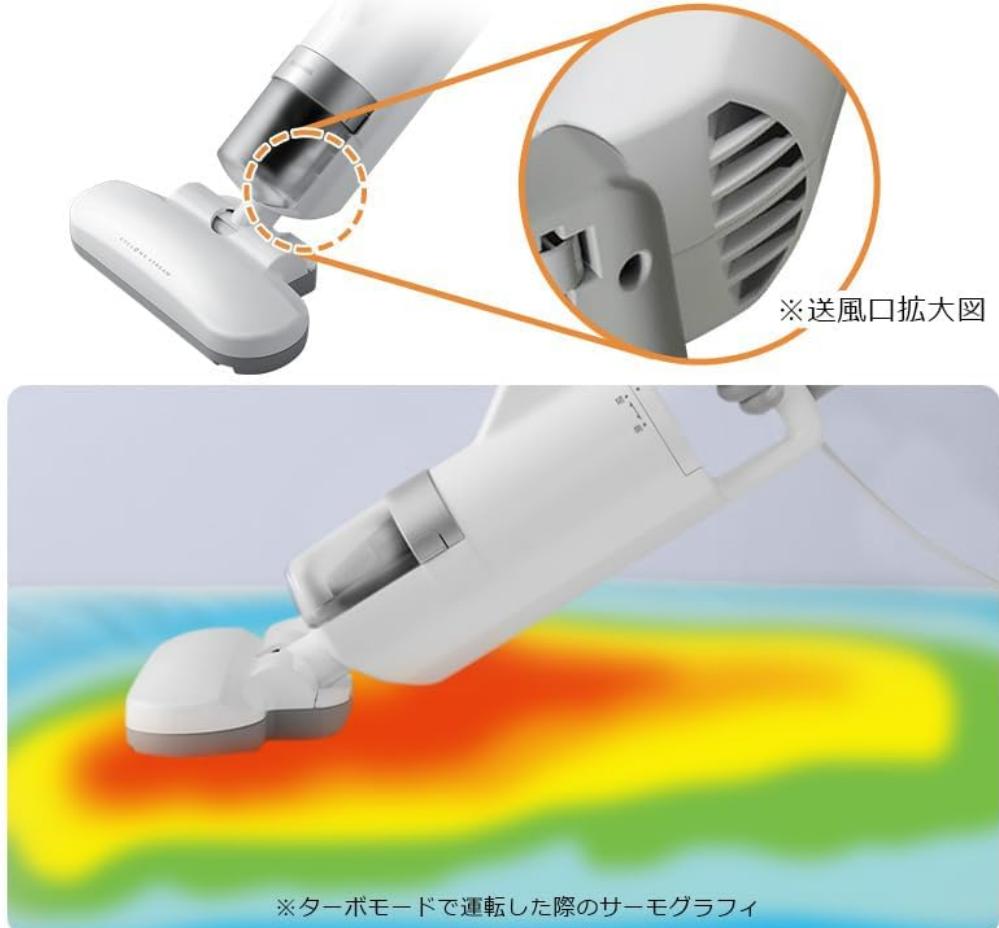


Image: Diagram illustrating the warm air outlet and its effect on heating the futon surface during operation.

- The cleaner automatically activates the tapping function (approx. 6,000 beats/minute) and warm air function when in operation.
- Move the cleaner slowly and steadily across the futon surface. The tapping action helps to lift embedded dust and mites, while the warm air creates an unfavorable environment for them.
- The unique Cyclone Stream Head ensures powerful suction without damaging the fabric.

4.4 Storage

収納性・操作性抜群

可動式ヘッド

立てて収納も可能な可動式ヘッド。

可動することでデコボコしてお掃除らくらく!



Image: The cleaner demonstrating its movable head for flexible cleaning and its ability to stand upright for storage.



Image: The futon cleaner stored upright in a narrow space next to a bed, showcasing its self-standing capability.

- The cleaner features a movable head that allows it to stand upright for convenient storage.
- After use, ensure the cleaner is turned off and unplugged.
- Fold the head into the upright position and store the cleaner in a dry, safe place.

5. MAINTENANCE

Regular cleaning and maintenance will ensure optimal performance and extend the lifespan of your futon cleaner.

5.1 Cleaning the Dust Cup and Filters



Image: A hand detaching the dust cup from the main unit of the futon cleaner.



Image: A hand removing the filters from inside the dust cup.



Image: Filters being rinsed under running water.

1. Ensure the cleaner is unplugged before cleaning.
2. Press the release button to detach the dust cup from the main unit.
3. Remove the dust collection filter and exhaust filter from the dust cup.
4. Empty any collected dust and debris from the dust cup into a trash bin.
5. Rinse the dust cup and both filters thoroughly under running water until clean.
6. Allow all parts to air dry completely before reassembling. Ensure they are completely dry to prevent mold or damage.
7. Reassemble the filters into the dust cup, then attach the dust cup back to the main unit until it clicks securely into place.

5.2 Cleaning the Tapping Pad/Head

- Periodically check the tapping pad for any tangled hair or debris.
- Use a soft brush or cloth to gently clean the surface of the tapping pad. Do not use water directly on the electrical components of the head.

6. TROUBLESHOOTING

If you encounter any issues with your futon cleaner, please refer to the following common problems and solutions.

Problem	Possible Cause	Solution
Cleaner does not turn on.	Power cord not properly plugged in. No power from outlet.	Ensure the power cord is securely plugged into a working outlet. Check the circuit breaker.
Weak suction power.	Dust cup is full. Filters are clogged. Obstruction in the suction inlet.	Empty the dust cup. Clean and dry the dust collection and exhaust filters. Check for and remove any blockages in the suction head.
Unusual noise during operation.	Foreign object caught in the tapping pad or suction path.	Turn off and unplug the cleaner. Inspect the tapping pad and suction inlet for any foreign objects and remove them carefully.
Dust mite sensor always red/yellow.	Area is very dusty. Sensor window is dirty.	Continue cleaning the area thoroughly. Wipe the sensor window with a soft, dry cloth.

If the problem persists after trying these solutions, please contact IRIS OHYAMA customer support.

7. SPECIFICATIONS

Feature	Specification
Model Number	IC-FAC2-W
Manufacturer	IRIS OHYAMA
Power Supply	AC100V (50/60Hz)
Power Consumption	400W
Cord Length	Approx. 4m
Product Dimensions (in use)	Approx. 25cm (W) x 45.9cm (D) x 21.2cm (H)
Product Dimensions (stored)	Approx. 25cm (W) x 14.4cm (D) x 40.3cm (H)
Product Weight (packaged)	2.12 kg
Dust Collection Capacity	0.2 L
Dust Collection Method	Cyclone method
Vibration Frequency	Approx. 6,000 times/minute
Filter Type	Paper, Non-woven fabric, Polypropylene
Recommended Use	Hard floors (Note: Product is a futon cleaner, primary use is bedding)

8. WARRANTY AND SUPPORT

This IRIS OHYAMA product comes with a manufacturer's warranty.

8.1 Manufacturer's Warranty

- The product is covered by a **1-year manufacturer's warranty** from the date of purchase.
- Please retain your proof of purchase (receipt or invoice) as it will be required for warranty claims.
- The warranty covers defects in materials and workmanship under normal use. It does not cover damage caused by misuse, accidents, unauthorized repairs, or normal wear and tear.

8.2 Customer Support

- For technical assistance, troubleshooting beyond this manual, or warranty inquiries, please contact IRIS OHYAMA customer support.
- Contact information can typically be found on the official IRIS OHYAMA website or on the product packaging.
- When contacting support, please have your product model number (IC-FAC2-W) and date of purchase ready.