Android Car Stereo instruction (Picture for reference only)

For Honda Accord 7 2003-2007

Content

Content	
[Customer]	2
[Instructions for use]	2
1. Tips and warnings	2
2. Safety Tips	3
3. Machine Reset	3
[Installation]	4
[Wiring]	5
1. Product Dimension	5
2. Back interface diagram	5
3. Harness	6
4. Power Cable Connection	8
5. How to set Protocal Setting	10
6. How to set air conditioner	11
7. How to activate Voice Control	12
8. Installation Steps	14
7. Schematic diagram of reversing camera wiring	16
8. Fixed machine	18
9. Suitable models	18
10. Specifics	18
[Introduction to basic functions]	19
[Trouble Shooting]	32

Customer Service Contact: yanningqiu2021@163.com

[Customer]

Dear Customer:

Thanks for buy our car player, it is our honor and pleasure to server you to using our product. Before using this product, please read this manual very carefully and keep it properly. Your kindly feedback and support will prompt us to do the better. Thank you.

[Instructions for use]

For the sake of your safety, please don't watch the video while driving and operating a machine; Please dispatch the volume to clearly while driving to the voice to the outside world. Before operation, please read this manual and other manual system, understand the use of manual and machine related safety tips and warning signs, after reading in a readily accessible place for ready reference.

- 1. Pay attention to traffic safety in the first place.
- 2. If you meet difficulty in operating the system, please again after he parked his car in a safe place.
- 3. Don't let children operate this machine, lest cause personal injury and damage to the machine.
- 4. Please follow the traffic rules when using satellite navigation function to drive.
- 5. Please do not ban the use of electronic equipment or it is forbidden to use open flame such as gas stations, brewery, strong electromagnetic interference region, otherwise may cause danger.
- 6. Don't maintenance, installation of the machine itself. Under the condition of the plug do not install or repair the machine, by not trained in electronic equipment or vehicles accessories installation personnel or the lack of experience installation and maintenance of this machine is very dangerous.
- 7. Do not install the machine storage or in direct sunlight place, don't put it in other harmful material environment, especially the LCD screen, if the installation of the LCD screen is in the air conditioner near the air duct, please keep cool and hot air blows directly to the machine, otherwise it may damage the machine, even on the bus or personal injury.
- 8. Please do not use some sharp objects painted screen, don't use hard objects to press the screen, otherwise will cause damage to display or touch screen.
- 9. In order to guarantee the normal operation of the machine, and prevent the occurrence of fire or get an electric shock, please don't expose machine in damp air, more can't liquid drying machine.

1. Tips and warnings

In order to emphasize the important information in the user manual, please pay special attention to the label when you see. It indicates some important warning and prompt information.

2. Safety Tips

Please read all instructions before installation, and it is recommended that car audio professionals install the machine.

This machine is suitable for vehicle-mounted 12V power supply system (there must be a grounding wire), please do not install this machine in a 24V vehicle-mounted, otherwise it will damage the machine.

Do not repair the power fuse without professional guidance. Improper use of the fuse will cause damage to the machine and cause a fire.

- In order to avoid violating traffic rules, drivers cannot watch videos while driving and operating machines to avoid unnecessary accidents.
- For safety and to ensure the normal use of the product, please invite professionals to install, disassemble or repair the machine to avoid damage to the machine and accidents. For more information, please contact your local professional car audio store.
- Please avoid putting this product in humid environment and water to avoid fire caused by electric shock or other unnecessary damage.


Note: To prevent short circuit, please remember to turn off the car and disconnect the ACC connected to B+ before installation.

3. Machine Reset

- 1. The first use of the system before or after the replacement battery, the machine must be reset.
- 2. When the machine function is not normal, the machine must be reset.
- 3. Click restore factory settings in system settings interface, make the machine is in the initial state.
- 4. Use a pointed object, press the RESET button on the panel, or click the system RESET in the system settings, the machine will be RESET to turn it off, back to the factory the initial state.

Note: press the RESET button and the system initialization will lose time and set the value before.

[Installation]

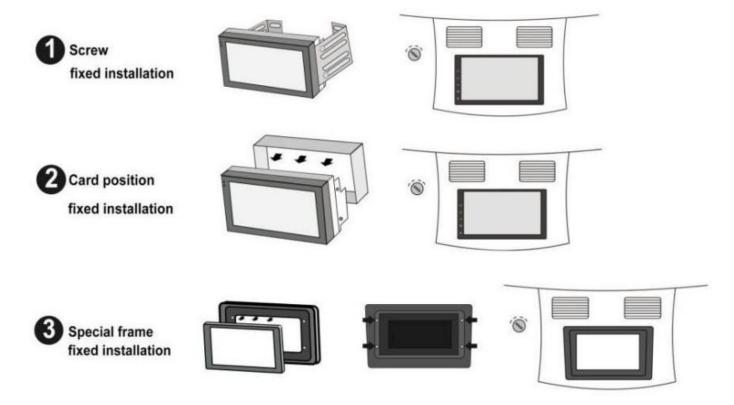

As shown in the figure above, there are three ways to install the machine, please choose one of them according to the actual situation. Of course, you can also re-install the new radio according to the installation method of the original car radio.


[Wiring]


1. Product Dimension




216mm


2. Back interface diagram

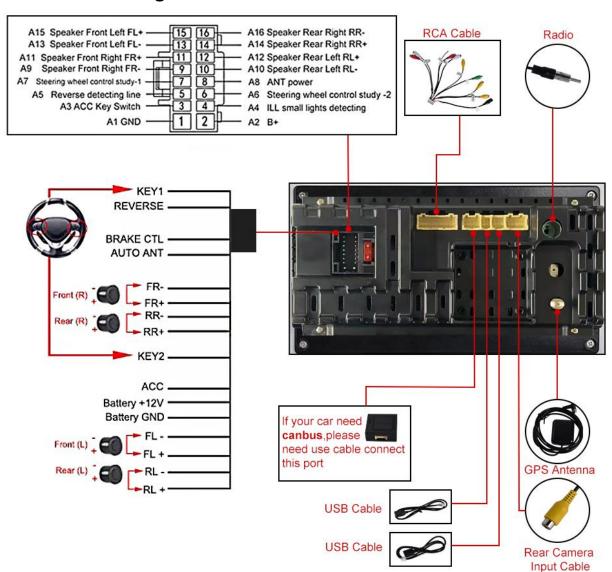


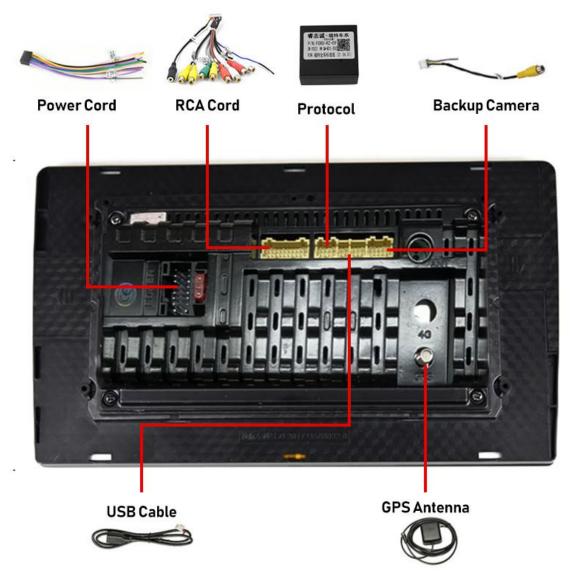


3. Harness

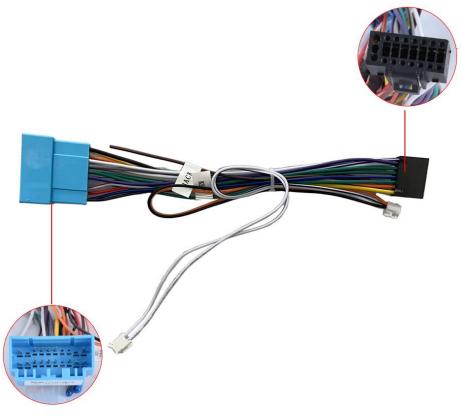

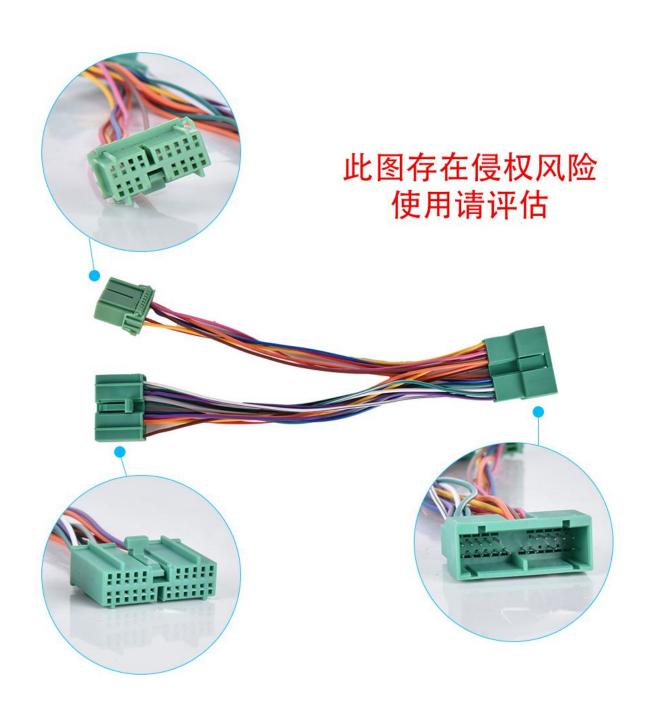

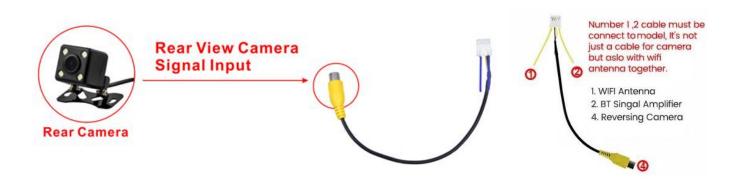

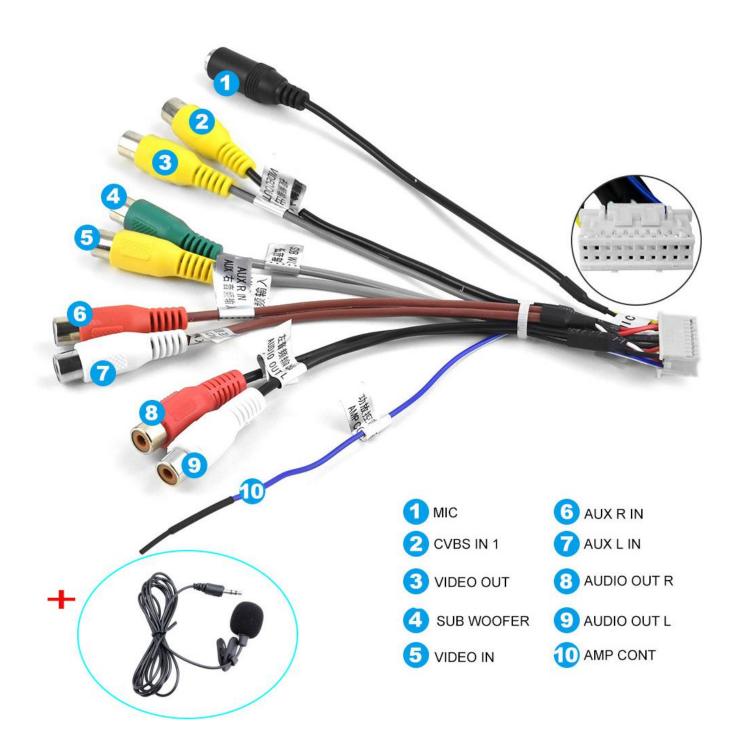

4. Power Cable Connection


Video link for reference:

https://v.youku.com/v_show/id_XNTg0OTM2MjAzNg==.html https://v.youku.com/v_show/id_XNTg0OTM2MzUzNg==.html

For Honda Accord 2003-2007

Make sure to plug the our green 2 connectors into the decoder port of this player or the A/C will not work.

Connect the original A/C plug into the connector.

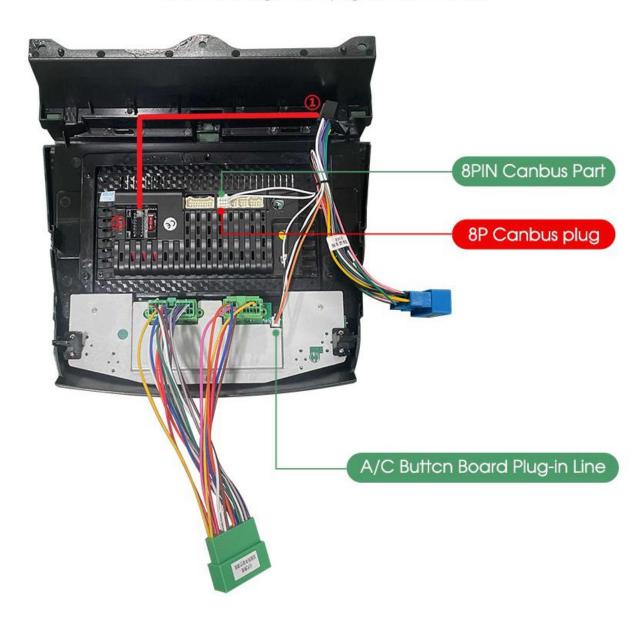

5. How to set Protocal Setting:

- 1. Car Settings Factory Settings (passwords: 8888) Patameter Settings Protocal settings
- Daojun choose your car model
- 2. Turn off your car and restart
- 3. You can check the canbus "connect" or "disconnect" through "Car Settings System info"





6. How to set air conditioner:

- ① From the main harness there are two small white plugs that need to connect on the back of the unit, one with 2 wires and 8 pins, the other with 4 pins and 4 wires. You must plug these in for the controls to display.
- ② Then, go to "settings->car information->about device(code:8888)->Can type->75->Accord 7 Double drive air conditioner (if your car is single climate please choose Accord 7 single drive air conditioner)"





How to judge whether your car is Single Zone Climate Air Conditioner or Dual Zone Climate Air Conditioner?


- Method 1:
- Single AC: The temperature of the air conditioner is the same
- Dual AC: The air conditioner can blow cold air in one channel and warm air in the other channel, and the temperature on both sides can be different
- Method 2:
- If your car is equipped with Dual Zone Climate Air Conditioner, there will be a "DUAL" button on the air conditioner hollow board, if not, it means that your car is equipped with Single Zone Climate Air Conditioner
- If you don't know how to Single Zone Climate Air Conditioner or Dual Zone Climate Air Conditioner, professional installation is recommended

7. How to activate Voice Control:

- (1) Click app "Podofo Voice" Wake-up,
- (2) Say "Hey podofo" to use the voice control.
- (3) You also can open or close the floating icon.

If the Voice Activation is not activated, please contact us to slove it: yanningqiu2021@163.com



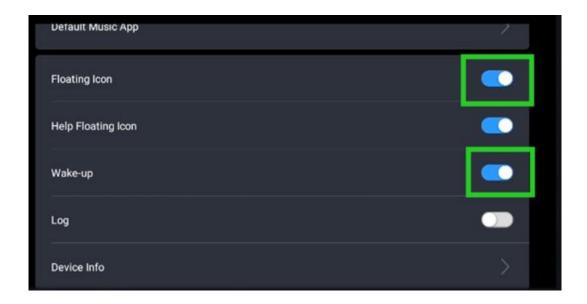

Podofo Voice Function:

- Standard Version: use local apps that could not connect Internet Lifetime using
- Pro Version: use all apps **One-Year using** (from the radio activate)

If you want to extend the Pro version, you need to buy it extra. You can search it in "Podofo+" or contact us.



Language command for reference:

Неу Тор	Homepage	Answer
Get help	Open video	Reject
Play music	Close video	Open settings
Play online music	Open radio	Close settings

Close online music	Close radio	Turn on wifi	
Close music	Scan forward	Turn off wifi	
Previous track	Scan back	Mute volume	
Next track	Previous channel	Unmute volume	
Resume play	Next channel	Turn on screen	
Pause music	Open youtube	Turn off screen	
Open navigation	Close youtube	Volume up	
Close navigation	Open bluetooth	Volume down	
	Close bluetooth		

8. Installation Steps







Picture 1

Picture 2

Picture 3

1>How to find the power cord of the car?

First turn the car key to the ACC state. Then regulate the Universal Watch to the 20V gear. Connect the black stylus to the power ground (the outer ironclad of the cigar lighter) and use the red stylus to test each wire of the car. Normally a car has two wires about 12V(some cars only have one). That is the positive pole line. How to distinguish the ACC and memory line? Pull out the car key after you find the two positive pole lines. The memory line is the electrically charged one after you nu plug the key. *(Look the Picture 1)

2>How to find the ground wire of the car (negative pole)?

Turn the Universal Watch to the on/off beep gear. Then connect the black stylus to the power ground (the outer ironclad of the cigar lighter) and use the red stylus to test each wire except the two power lines. The energized one is the ground wire(negative pole). Some cars have two ground wires. *(Look the Picture 2)

3>How to find the horn line of the car?

Turn the Universal Watch to the on/off beep gear. Connect the black stylus to any wire except the power cord and ground wire. Then use the red stylus to test each remaining wire. The energized one is

the horn wire. Then use the same method to find out the other horn lines. *(Look the Picture 3)

4>How to test whether the unit work properly?

When you get the unit, you'd better test the unit with battery or power supply before installation. Wire connection method: Twist the red wire and yellow wire together and then connect them to the positive pole. Connect—the black wire to the negative pole. Then press the switch to turn on the unit and get a horn to connect to the horn wire. (Two wires connected to the horn are of the same color. The white wire is supposed to be connected to the positive pole and the white one with black part connected to the negative pole of the horn. You can make no distinction between the positive and negative poles of the horn.) Then test the function of the unit.

5>How to connect Bluetooth?

Turn on the unit and initiate Bluetooth function of phone, and then search for the user name of the unit. Click the connect button and the phone will show it is connected. If you want to play music with Bluetooth, press the function transition button to switch to Bluetooth mode and then click songs on your phone. You can also dial numbers on your phone to make a phone call with Bluetooth.

6>How to fix the unit?

Since each car has a different way of fixing the unit and the location of the screws are different, there is no defined way to fix the unit. You may consult the fixing method of the original unit. If it was fixed by tightening screws with the steel angle, you can unload the steel angle of the original unit to both sides of our unit, then use the electrician tape to tight the steel angle (since screw hole size is probably unmatched). If the original unit was fixed with iron frame, you can fix the iron frame of our unit in the car first, and then push the unit to fasten it. If the size is not fit, you can wrap the unit with electrician tape to increase the volume of the unit, and then put it in and fasten it. Or you can think of a better way to fix it, but anyway, you can fix it.

7>How to install the navigation antenna?

First you should tighten the screws of the navigation antenna and the unit. Then you must fix the navigation antenna module in a place that has sunlight or on the windshield. (That's very important because poor installation will affect navigation signals.)


8>The default factory mode password

Factory mode password: 8888. (Different products, the password may be different)

9>The default Bluetooth Pin Code

Bluetooth Pin Code: 0000/1234

9. Schematic diagram of reversing camera wiring

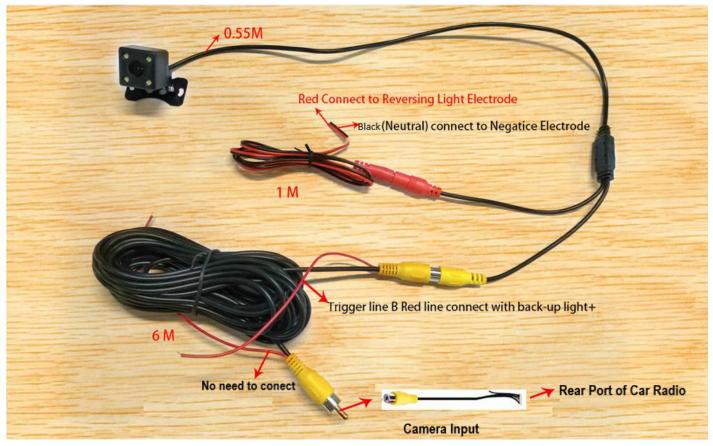


There is a separately Camera Input, please do not connect to RCA cable.


Here's the complete steps of camera wiring.

- 1. Camera power cable: red and black.
- --- Red connection to reverse the positive light, black to reverse the negative light.
- 2. Camera RCA cable: yellow port.
- ---- Insert it on the radio rear input cable. It's a single cable with yellow port with label "REVERSE/BACK/REAR CAMERA")
- 3. Trigger Cable
- 3.1 near the radio: the red wire A -- NO Need to connect
- 3.2 near the camera: the red wire B -- connects to car's rear light positive.

When you pull the rear gear, the device will automatically display the rear view image.

- 1.Monitor (Not Induded in the Package)
- 2. Camera Power Source

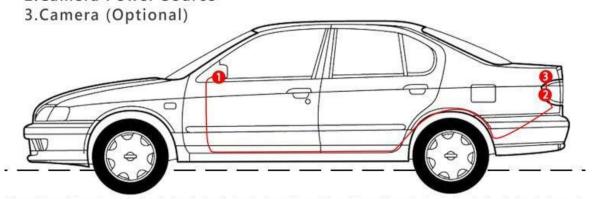

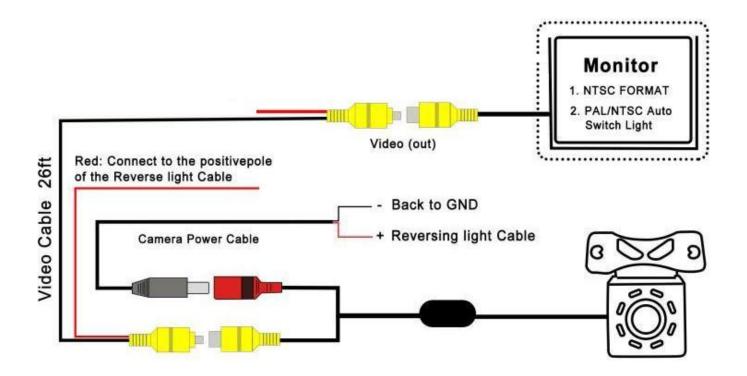

Wiring method:

Preparation tools: tape, screwdriver, wire cutters, plastic prying tool, traction wire.

Step 1: Insert the original accessory camera wire harness into the rear license plate light hole, and then directly snap it in.

Step 2: Step 2: Remove the trunk lining, pull out the waterproof rubber ring, use the tow line to pull the camera cable out of the suitcase, insert the camera wire harness and data connector into the hole of the baffle, and finally rein stall the waterproof rubber ring.

Step 3: Remove the decorative lining board on the left side of the trunk, plug the data power integrated extension cable with the camera harness, and lead out from the rear trim panel along the original car harness.

Step 4: Peel off the sealing strip on the left side door of the rear seat, route the cable into the rear cockpit, and pull out the data power integrated plug and the remaining extension cords.

Step 5: Recover the trunk, and insert the extension cord into the gap of the plastic panel along the rubber strip on the door side, all the way to the cockpit door.

Step 6: Remove the storage box under the headlights, pass through the top of the OBD interface, and then connect the wiring interface to the navigator interface.

NOTE: Whether you are using a rear view camera or not, please connect the rear view wire. Otherwise, your WiFi and Bluetooth signals will suffer!

10. Fixed machine

1. Fix the bracket on the left and right sides of the machine with screws, and adjust the position of the bracket according to the actual installation.

2. Screw the machine in the mounting position of the central console of the car.

11. Suitable models

This car radio is specially used for Honda Accord 7th 2003-2007, the size is: 275 (Top Width)*250 (Height)*216 (Bottom Width)mm, please refer to the compatibility table for suitable models. Please measure your car dashboard size before orders.

12. Parameters

System: Android 10.0 Chipset: 8227L-DEMO Screen size: 10.1"

Memory: 1GB (RAM)+16GB (ROM)

Screen resolution: 1024*600 Mirror link: Android/IOS

Radio chip: MTK

Power output: 4*45W

Work temperature: -40°C-80°C

Steering wheel control function: Support

Bluetooth version: 4.0

Power amplifier chip: AC7388

Radio Band: FM

Video output: Support

External microphone: support Maps: Built-in offline maps

WIFI: Support

USB: Double USB interface

Audio format: APE/FLAC/WAV/MP3/WMA etc Video format: MKV/RMVB/AVI/MP4/MDV etc

Picture format: PNG/JPEG/JPG/GIF/WBMP/BNP etc

Factory setting keyword: 8888

Language:


Chinese/English/French/Italian/Korean/Japanese/Arabic/Spanish/Portuguese/Russian/Turkish/Vietn

amese/Hebrew/Polish/German

[Introduction to basic functions]

[Main interface]









[Main functions and usage]



1.Music player



- Intelligent navigation
- > Click on the "Intelligent Navigation" icon to enter the navigation state

In the navigation state, only GPS navigation-related functions can be performed on the screen. If you need to do anything else, you need to exit the navigation first.

Navigation music function

In the network music / super CD/ local music / world broadcast / local radio / Bluetooth music state switch to GPS navigation, can normally enjoy the original state of music, when there is a navigation prompt, the system will automatically switch to navigation voi ce prompt state.

- > Function operation
- >This machine has the function of touching handwritten input destination query, please refer to the operation help of navigation int erface for the operation of navigation function.
- >Local music
- >Click the "Local Music" icon to enter the local music playback interface (this machine must have a SD card or USB port and corre sponding media files)


 Touch icon description
- On the music list, you can play songs that you like to choose from different styles : Loop play mode switch
- Back to the main interface



EXPEX

2. Video player





- ➤ Click the "Video" icon to enter the video list interface (this machine must have a SD card or USB port and corresponding media files)
- > Click on the video and enter the video play interface
- >Touch icon description
- Back to the main interface
- Return to the previous menu
- Previous / next
- > ## : Sound effect setting auto : Video scale




3. Radio





: Press this icon to select ST/LOC options.




Press the relative column for 3 seconds, the current radio frequency is saved in this place.



4. Bluetooth



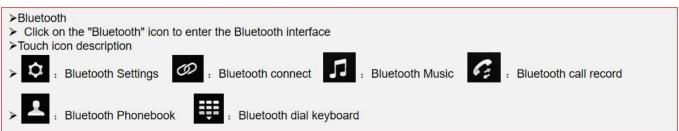



EXPEX


5. Bluetooth Music








6. Car audio settings

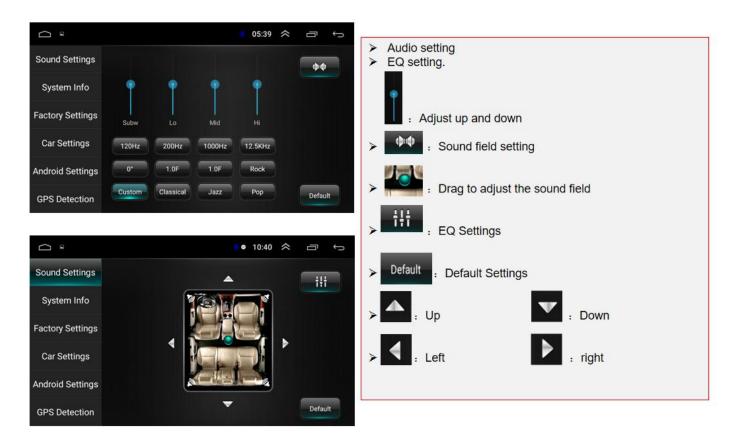



EXPEX

7. Steering wheel control studying

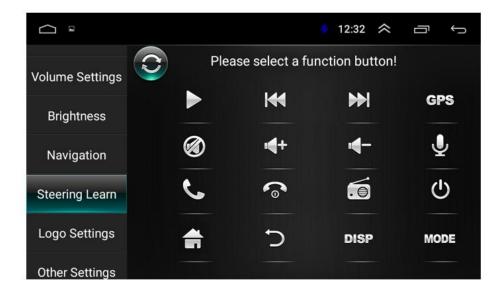

Please press and hold a botton of the steering wheel button and click the corresponding icon


22

Please follow below steps to connect the wires:

- 1. Find your car steering wheel control button signal wires, it is normally located under your driving wheel.
- 2. The signals have two, one gives "+" voltage and another gives GND voltage.
- 3. Check our unit power cable, there is a wire labled "key1" or "key1"
- 4. Connect the "+" Voltage wires to the "key1" or "key1" wires.
- 5. Connect the GND wire to GND wires of our unit.
- 6. Go to the this option to learn the steering wheel control function.
- 7. Press the relative function icon on the unit.
- 8. Press your steering wheel control button and there will be a voltage on our unit to memory.
- 9. Step by step to finalize all the buttons.

5. Mirror Link Feature for smartphone.

Use the APP named "TIMA" for the smartphone mirror link features.

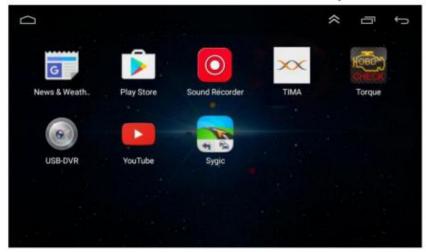

After you open the APP, you will go to the selection page according to your smart phone type.



Please follow the steps in the APP according to the instruction displayed.

6. Car Setting:

This APP is special designed for Car Android Device



6.2 System Info:



Users can check the unit system information here


(The above information is for reference only and is based on actual configuration).

6.3 Factory Settings



Users can change the unit presettings here. We do not recommend users to change any settings here as it may result unrecoverable damages to the unit (Password: 8888)

6.4 Car Settings:

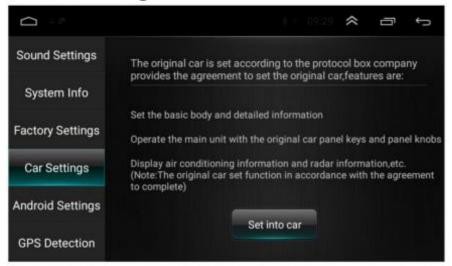



If users want to use the CANBUS to decode the car system do have the original steering wheel control, air conditioner etc, please contact with the sellers to buy the suitable CANBUS Decoding Box and make relative changes.

6.5 Android Settings



Users Press the "Go to settings" here to go to the android setting mode.



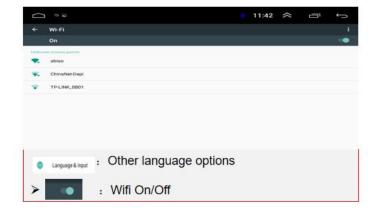


6.6 GPS Detection:



If users can not get the position in the navigation software, users can go here to check the hardware performance. If users can not find the GPS signal, please check if the GPS antenna is placed in the right way, make sure the receiver side is up, the side with stickers is down.

6.7 Volume Settings

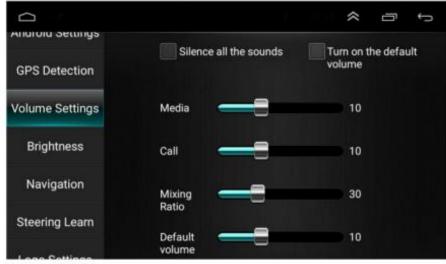

Users can adjust the volume ratio in different mode here.

6.8 Brightness




Users can change the brightness of the screen here.

6.9 Navigation



Users can select the relative navigation software as his preset one

6.12 Other Settings

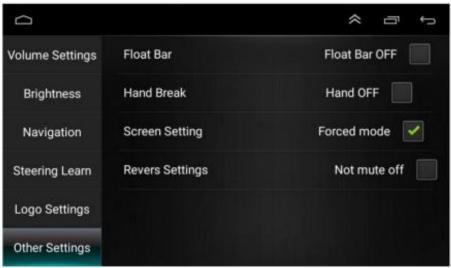

Float Bar: press this feature on to have the assitive touch point display on the screen all the time

Handbrake: press this on, then the device will not allow to watch video during driving due to safety reason


Screen Setting: This setting will force the screen in the Horizontal screen mode **Revers Settins:** if you need to have the sound of the unit when you are reversing the car and enter into reverse camera mode, please click it on

6.13 Offline Map—HERE WeGo


(Note: You can also use Google Maps online)

In order to use the offline feature of your device, follow the steps below to set it up.


- 1. Power on the device and connect the device to the internet via Wifi.
- 2. Find the APP named HERE WeGo in the main menu.

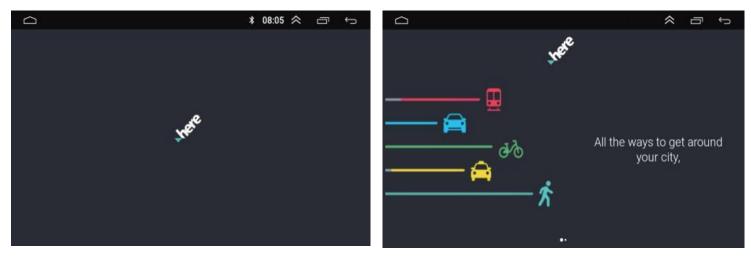

3. Follow the APP prompts to enter the main map page and find the options menu.

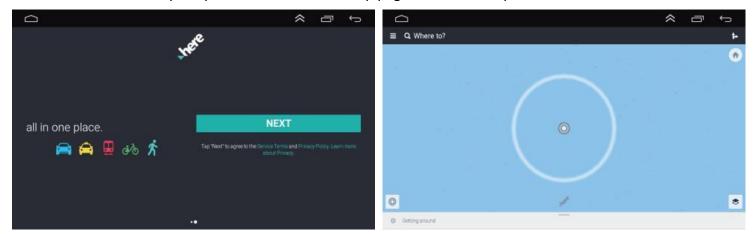

4. Click "Use the app offline" and download your favorite map data in the country list.

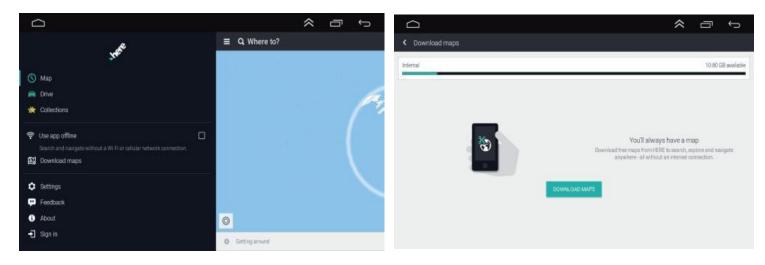

5. Click "Use the app offline" and download your favorite map data in the country list.

6.14 Supported Additional Devices

(Note: Additional devices are not included in the product and accessories, you need to purchase additionally!)

Icon	Name	Connection Way
~	External Microphone	RCA MIC Interface
	DAB+	USB
T.	DVR	USB
0802	OBD	Bluetooth
o	Subwoofer	RCA audio output or subwoofer interface
000	Amplifier	RCA audio output interface
	Video Output	USB
ψ	U disk	USB

Thank you again for using our product. If you have further questions, please contact our customer service staff. Product UI interface or functions may be modified and upgraded from time to time without notice. It is normal if the manual has some discrepancies!

7. Common troubleshooting wizard

Phenomenon

If you encounter the following problems in use, troubleshooting will help you quickly solve the problem, if the problem is still not resolved, it is recommended to contact our service department to help solve.

Reason

Handle

	The car key is not inserted into the switch and the switch is not open	Insert the vehicle key and open the door
Can not boot	Power line insertion host	Insert power cord
	May be the fuse of this machine is burned	Replace fuses with the same rated current
Touch screen is not allowed	Please press 5 fingers on the main page of the unit for 20seconds. Users will go to the screen/touch button calibrate page automatically	
Touch screen does not respond	System is dealing with transactions (road search, etc.), a moment, If the system is not working, you can try to reset it, if still can not be resolved, it is recommended to contact our service department to help solve	
The back light of the button is not working	Please check if the wire labled "ILL" is connected to the front lamp wire. When the front lamp is on, the unit back light will be on automatically. Users can also connect this ILL wire to continues +12V to keep the button light on always.	
	No camera installed	Install the camera, insert the CCD plug of the host
Without reversing visual image	Camera standard is wrong	Replace camera with matching system
The system is not started, rearview image reversing the process, the key is invalid	The driving safety of the emphasis on the principle of product design, the car after the preset priority	Must terminate the reverse action, in order to press the original car power button to start the system boot
	GPS antenna not inserted	Insert GPS antenna
GPS cannot locate	May be in a number of GPS signal shielding area	Test the car out of a distance, to observe whether the recovery of GPS signal, if not restored, please contact the service department
Boot can not locate and navigate	Navigation map blind, some remote mountain or road has not been established in the local area	Please contact the after-sales service department to confirm the updated map
Fuzzy search can not find the place to go	First confirm whether the input is correct, and then try to enter the location of another name, if you can not find, it may not be in our database, It is recommended to connect WiFi to use online maps.	
The navigation system to the selected road detour	Navigation system in the road search will consider various factors, in addition to the distance will consider the level of road, traffic rules, viaduct, trunk, etc., in short, to facilitate the drivers in the shortest possible time to reach the destination.	
A blank on the map	It may be too large or too small for navigation scale. Try to change scale size to see if you can restore the map display. If it is not resolved, Maybe map data is lost, It is recommended to connect WiFi to use online map.	

Thank you for your time.