

[Manuals.plus](#) /

› [Star Sat](#) /

› StarSat SR-250HD Lambo Full HD Satellite Receiver User Manual

Star Sat SR-250HD

StarSat SR-250HD Lambo Full HD Satellite Receiver

User Manual

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your StarSat SR-250HD Lambo Full HD Satellite Receiver. Please read this manual thoroughly before using the device to ensure proper functionality and to prevent damage.


2. SAFETY INFORMATION

- Ensure the power supply voltage matches the requirements specified on the device.
- Do not expose the receiver to rain or moisture to prevent fire or electric shock.
- Do not open the casing. Refer all servicing to qualified personnel.
- Place the receiver on a stable, flat surface with adequate ventilation.
- Disconnect the power cord during lightning storms or when unused for long periods.

3. PACKAGE CONTENTS

Verify that all items listed below are included in your package:

- StarSat SR-250HD Lambo Satellite Receiver
- Remote Control
- IR/External Display
- Warranty Card
- Mount Bracket for Receiver
- 12V Power Adapter
- AV Cable
- HDMI Cable
- 2x AAA Batteries (for remote control)
- Double Tape for External Display
- Double Tape for Mount Bracket

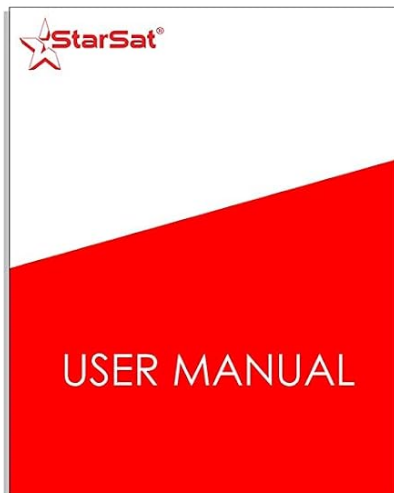

USER MANUAL



REMOTE CONTROL



SATELLITE RECEIVER



IR/EXTERNAL DISPLAY



WARRANTY CARD



MOUNT BRACKET FOR RECEIVER




DOUBLE TAPE FOR EXTERNAL DISPLAY




DOUBLE TAPE FOR MOUNT BRACKET



12V POWER ADAPTER



AVI CABLE



HDMI CABLE



2XAAA BATTERIES

Image: All components included in the StarSat SR-250HD Lambo satellite receiver package.

4. PRODUCT OVERVIEW

Familiarize yourself with the various ports and buttons on your StarSat SR-250HD Lambo receiver.



Image: Front and rear panel connections of the StarSat SR-250HD Lambo receiver.

Front Panel

- **Display:** Shows channel number or time.
- **Power Button:** Turns the receiver on/off or to standby.
- **CH+/CH- Buttons:** Navigate through channels.
- **USB 2.0 Port:** For connecting USB storage devices.



Image: Angled view highlighting the front display and side connections.

Rear Panel

- **LNB IN:** Connects to the satellite dish LNB.
- **IR:** For connecting the external IR receiver/display.
- **HDMI OUT:** Connects to your TV for high-definition video and audio.
- **AV OUT:** Connects to your TV for standard-definition video and audio.
- **USB 2.0 Port:** Additional port for USB devices.
- **DC 12V:** Power input for the adapter.
- **RS-232:** For programming and service.



Image: Detailed view of the side panels showing all input/output ports and control buttons.

5. SETUP

5.1 Connecting the Satellite Receiver

1. Connect to TV:

- For High Definition: Connect one end of the provided HDMI cable to the **HDMI OUT** port on the receiver and the other end to an HDMI input on your television.
- For Standard Definition: Connect the provided AV cable to the **AV OUT** port on the receiver and the corresponding AV inputs (Yellow for Video, White for Left Audio, Red for Right Audio) on your television.

2. Connect to Satellite Dish: Connect the coaxial cable from your satellite dish LNB to the **LNB IN** port on the receiver.

3. Connect External IR/Display: If using the external IR receiver/display, connect it to the **IR** port on the receiver. Position the external display in a visible location.

4. Connect Power: Plug the 12V power adapter into the **DC 12V** port on the receiver, then plug the adapter into a wall outlet.

5. Insert Remote Control Batteries: Open the battery compartment on the back of the remote control and insert the two AAA batteries, ensuring correct polarity.

6. Optional: Wi-Fi/4G Dongle: If you have a compatible Wi-Fi or 4G USB dongle (not included), insert it into one of the **USB 2.0** ports for internet connectivity.

5.2 Initial Power On and Channel Scan

- Turn on your television and select the correct HDMI or AV input source.
- Press the Power button on the receiver or remote control to turn on the device.
- Follow the on-screen instructions for initial setup, which may include language selection and time zone.
- Navigate to the 'Installation' or 'Channel Search' menu.

5. Select 'Blind Scan' or 'Automatic Scan' to search for available satellite channels. This process may take several minutes.
6. Once the scan is complete, save the channels. Your receiver is now ready for use.

6. OPERATING INSTRUCTIONS

6.1 Basic Operation

- **Channel Selection:** Use the CH+/CH- buttons on the remote or front panel, or enter the channel number directly using the numeric keys.
- **Volume Control:** Use the VOL+/VOL- buttons on the remote.
- **Menu Access:** Press the MENU button to access the main menu for settings and features.
- **EPG (Electronic Program Guide):** Press the EPG button to view program schedules.

6.2 PVR Functionality (Recording)

To use the Personal Video Recorder (PVR) function, connect a USB storage device (e.g., USB flash drive or external hard drive) to one of the USB 2.0 ports.

- **Instant Recording:** While watching a channel, press the Record button on the remote to start recording. Press it again to stop.
- **Scheduled Recording:** Access the EPG, select a program, and choose the option to schedule a recording.
- **Playback:** Access the 'PVR' or 'Media' menu to play back recorded content.

6.3 Multimedia Playback

The receiver supports playback of various media types (MPEG4, AAC, MP3) from a connected USB storage device.

- Insert a USB device containing media files into a USB 2.0 port.
- Navigate to the 'Media' or 'USB' menu from the main menu.
- Select the desired file type (Video, Music, Photo) and browse your files.
- Select a file to begin playback.

6.4 YouTube Access

If a compatible Wi-Fi or 4G dongle is connected and configured for internet access, you can use the built-in YouTube application.

- Ensure your receiver is connected to the internet.
- Navigate to the 'Applications' or 'Internet' menu.
- Select the YouTube application and follow the on-screen prompts.

7. MAINTENANCE

7.1 Cleaning

- Always disconnect the power before cleaning.
- Use a soft, dry cloth to clean the exterior of the receiver.
- Do not use liquid cleaners, aerosols, or abrasive cleaning agents.

7.2 Software Updates

Periodically check for software updates through the receiver's menu (usually under 'System' or 'Tools'). Updates can improve performance and add new features. Follow the on-screen instructions carefully during the update process.

8. TROUBLESHOOTING

If you encounter problems with your receiver, refer to the following common issues and solutions:

Problem	Possible Cause	Solution
No picture or sound	Incorrect TV input selected; loose HDMI/AV cable; receiver not powered on.	Check TV input source; ensure cables are securely connected; power on the receiver.
No signal / Weak signal	LNB cable loose or damaged; satellite dish misalignment; bad weather.	Check LNB cable connection; adjust satellite dish (if experienced); wait for weather to clear.
Remote control not working	Batteries depleted or incorrectly inserted; obstruction between remote and receiver.	Replace batteries; ensure correct polarity; remove obstructions; point remote directly at receiver or external IR sensor.
Receiver freezes or crashes	Software issue; overheating.	Disconnect power for 30 seconds, then reconnect; ensure adequate ventilation; check for software updates.
Cannot connect to Wi-Fi/4G	Dongle not compatible or not inserted; incorrect network settings.	Ensure dongle is compatible and properly inserted; verify Wi-Fi password and network settings.

9. SPECIFICATIONS

Technical specifications for the StarSat SR-250HD Lambo Satellite Receiver:

- **Model:** SR-250HD
- **Brand:** Star Sat
- **Manufacturer:** Starsat
- **Compatible Devices:** Television
- **Connectivity Technology:** Wi-Fi (via external dongle, not included)
- **Compatible Media Type:** DVBS2, MPEG4
- **Video Output:** HDMI, AV
- **Audio Output Mode:** Stereo, Surround
- **Supported Audio Formats:** AAC, MP3
- **Aspect Ratio:** 16:9
- **USB Ports:** 2 (USB 2.0)
- **Dimensions (LxWxH):** 20.5 x 12.8 x 7.1 Centimeters
- **Item Weight:** 410 g
- **Batteries Required:** No (for receiver), Yes (for remote - 2x AAA)
- **Model Year:** 2020

10. WARRANTY AND SUPPORT

Your StarSat SR-250HD Lambo receiver comes with a warranty. Please refer to the included Warranty Card for specific terms and conditions, including the warranty period and coverage details. For technical support, service, or further inquiries, please contact your local StarSat dealer or authorized service center.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B07MGD2FV9>

More documents and user manuals: <https://manuals.plus/>