

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Bewinner](#) /

› [Bewinner Tiger 911 Wired Telephone Voice Dialer Alarm System User Manual](#)

Bewinner Tiger 911

Bewinner Tiger 911 Wired Telephone Voice Dialer Alarm System User Manual

Model: Tiger 911

1. INTRODUCTION

The Bewinner Tiger 911 is a wired telephone voice auto-dialer designed to enhance the security of your home or office. This system integrates with existing alarm hosts or independent sensors to automatically dial pre-programmed telephone numbers when an alarm is triggered, providing immediate notification. Its microcomputer design ensures reliable operation and intelligent judgment for various security needs.



Telephone Dialer

All-round boot, self-detection function, to eliminate the occurrence of failure.

Image 1.1: The Bewinner Tiger 911 Telephone Voice Dialer, a compact device for automated alarm calls.

2. PRODUCT OVERVIEW AND FEATURES

The Tiger 911 voice dialer is engineered with advanced features to provide robust security notifications.

- **Microcomputer Design:** Features a microcomputer for automatic dial-up assistance. It supports N.C. (Normally Closed), N.O. (Normally Open), or voltage input triggers, adaptable to various alarm systems.
- **Remote Control Capability:** Can be integrated with anti-theft hosts or independent sensors. Allows for remote control via telephone for convenient and efficient management.
- **Information Storage:** Capable of storing up to 4 groups of telephone or mobile phone numbers, each with a maximum of 16 digits. Includes two levels of password protection. Stored numbers and voice recordings are retained even after power loss.
- **Intelligent Judgment:** Incorporates an all-round boot and self-detection function to prevent failures. Features an automatic voice recording IC for direct recording or playback via microphone and speaker.

- **Password Security:** Equipped with a password feature, allowing users to stop an accidental or triggered dialing alarm directly through the panel keys.



Telephone Dialer

Can store 4 groups of telephone or mobile phone

Image 2.1: The voice dialer shown alongside a smartphone, illustrating its function to store and dial up to 4 groups of telephone numbers.

3. SETUP

Proper setup is crucial for the effective operation of your Bewinner Tiger 911 voice dialer.

3.1 Components Overview

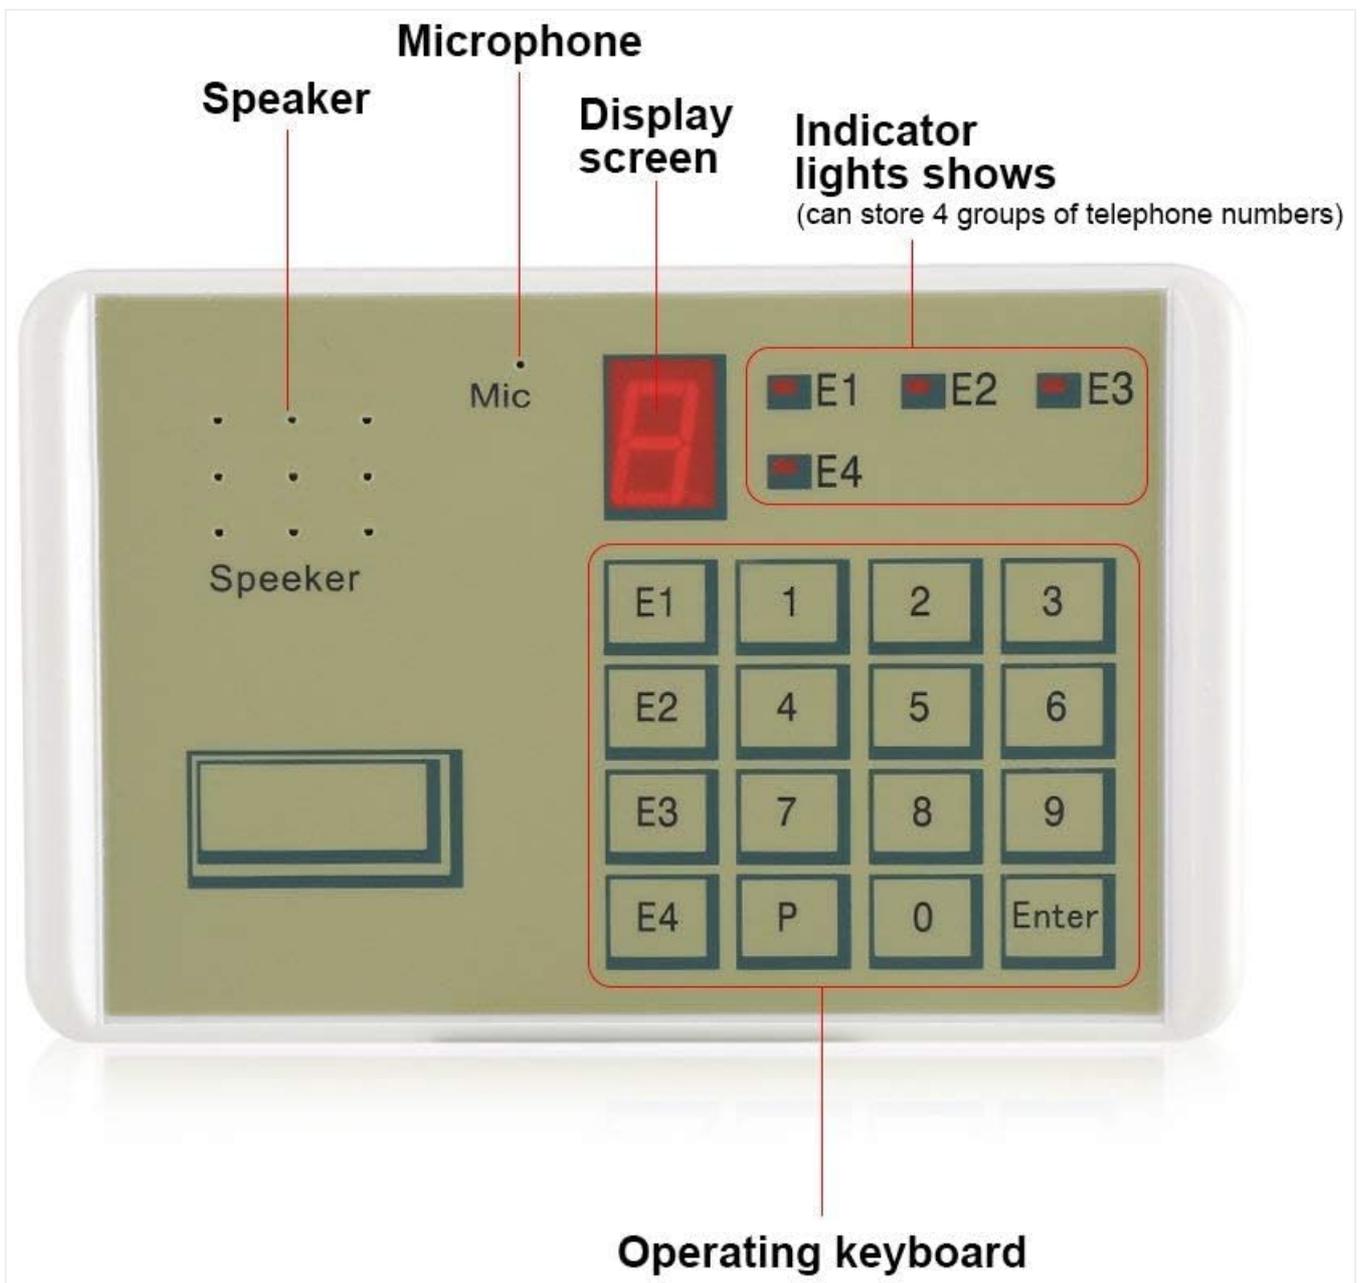


Image 3.1: A detailed diagram highlighting the key components of the voice dialer: Speaker, Microphone, Display Screen, Indicator Lights (E1-E4), and Operating Keyboard.

3.2 Connecting to an Alarm Host

The voice dialer acts as an intermediary between your alarm host and your phone.

1. **Connect Alarm Host:** Connect the alarm host's output to the designated input terminals on the voice dialer. The dialer supports N.C. (Normally Closed), N.O. (Normally Open), or voltage input triggers. Refer to your alarm host's manual for its output type.
2. **Connect Telephone Line:** Plug a standard telephone line into the dialer's telephone line crystal jack.
3. **Power Connection:** Connect the 12V power adapter to the dialer and a power outlet.

Tiger 911

Smart Voice Dialer

Tiger 911 smart voice dialer for a wide range of applications and multiple brands can be compatible



Image 3.2: Connection diagram illustrating how the voice dialer integrates with an alarm host and a telephone line to notify the user's mobile phone.

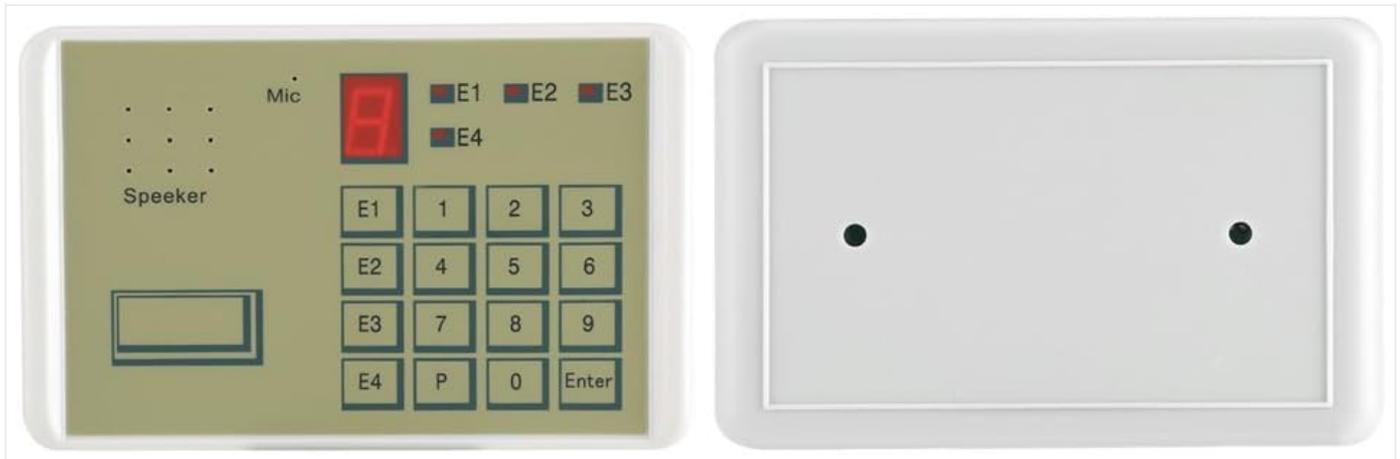


Image 3.3: Close-up of the wiring connections for the voice dialer, including the telephone line connector and bare wires for alarm input.

4. OPERATING INSTRUCTIONS

Follow these steps to configure and operate your voice dialer.

4.1 Recording Voice Alarm

The dialer can store a 20-second voice message that will play when an alarm is triggered.

1. Press the **Record** button (if available, or follow specific manual instructions for recording mode).
2. Speak clearly into the built-in microphone (Mic) for up to 20 seconds.
3. Press the **Stop** button (or equivalent) to end recording.
4. The recorded message will play automatically when the dialer activates.

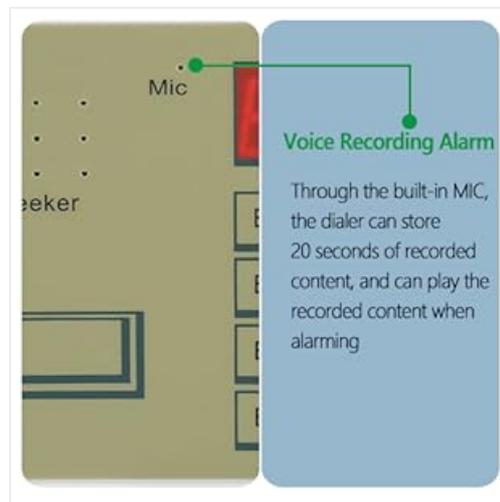


Image 4.1: The microphone area of the dialer, indicating its voice recording alarm capability for a 20-second message.

4.2 Storing Telephone Numbers

You can program up to 4 telephone numbers for the dialer to call during an alarm event. Each number can be up to 16 digits long.

1. Enter programming mode (refer to the specific manual for key sequence, typically involving a password).
2. Select one of the four groups (E1, E2, E3, E4) using the corresponding button on the operating keyboard.
3. Input the desired telephone number using the numeric keypad.
4. Press **Enter** to save the number for that group.
5. Repeat for other groups as needed.

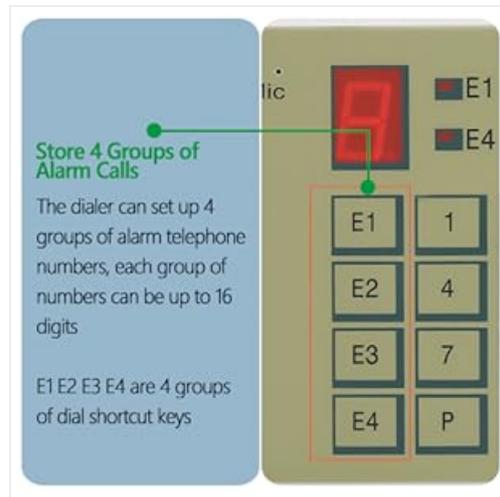


Image 4.2: The operating keyboard highlighting the E1-E4 buttons used for storing and accessing the four groups of alarm telephone numbers.

4.3 Stopping an SOS Dial

If the dialer is accidentally triggered or you wish to stop an ongoing alarm call, you can do so using the password.

1. Enter your private password directly using the numeric keypad.
2. Press **Enter**. The dialing sequence will cease.



Image 4.3: The numeric keypad, indicating its use for entering a password to stop an accidental or triggered SOS dial.

5. MAINTENANCE

To ensure the longevity and optimal performance of your Bewinner Tiger 911 voice dialer, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the exterior of the device. Avoid using abrasive cleaners or solvents, which can damage the surface.
- **Environment:** Keep the device in a dry environment, away from direct sunlight, extreme temperatures, and high humidity.
- **Power Supply:** Ensure the device is connected to a stable 12V power supply. Unplug the device during electrical storms or when not in use for extended periods.
- **Cable Integrity:** Regularly inspect all connected cables (telephone line, alarm input, power) for any signs of wear or damage. Replace damaged cables immediately.

6. TROUBLESHOOTING

If you encounter issues with your voice dialer, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Device does not power on.	No power, faulty adapter, or loose connection.	Check power adapter connection and wall outlet. Ensure the adapter is functioning correctly.
Dialer does not make calls when triggered.	Incorrect alarm input wiring, no phone numbers stored, or telephone line issue.	Verify alarm input wiring (N.C./N.O./voltage). Ensure phone numbers are correctly programmed. Check telephone line connection and functionality.
Recorded voice message is unclear or not playing.	Recording error or microphone issue.	Re-record the voice message, speaking clearly and at an appropriate volume. Ensure the microphone is not obstructed.
Cannot stop dialing with password.	Incorrect password entered.	Ensure the correct password is being entered. If forgotten, refer to the full manual for password reset procedures (if available).

For more complex issues, please consult the full product manual or contact customer support.

7. SPECIFICATIONS

Detailed technical specifications for the Bewinner Tiger 911 Wired Telephone Voice Dialer.

Feature	Detail
Brand	Bewinner
Model Number	Tiger 911
Power Source	Corded Electric
Voltage	12 Volts
Connectivity Technology	Wired
Compatible Devices	Smartphone (for receiving calls)
Alert Type	Entry
Control Method	Remote (via phone call)
Included Components	Remote Control (functionality, not a physical remote)
Item Weight	0.09 Kilograms (approx. 3.17 ounces)
Sensor Technology	Motion Sensor (compatible with, not built-in)
Voice Recording Length	20 seconds
Phone Number Storage	4 groups, up to 16 digits each
Product Dimensions	Approx. 14cm x 9cm x 3cm (5.51in x 3.54in x 1.18in)

Telephone Smart Voice Dialer

Specification:

Operating voltage: 12V

Alarm receiving mode: dialing

Wireless reception frequency: none (MHz)

Alarm Horn Sound: None (dB)

Voice recording length: 20 (S)

Save the phone number: 4 (s)

Phone number Bit length: 16 (bit)

Product Size: Approx. 14 * 3 * 9cm / 5.5 * 1.2 * 3.5in

Package Weight: Approx. 258g



Image 7.1: A visual representation of the product specifications, including operating voltage, alarm receiving mode, voice recording length, and dimensions.

8. PRODUCT VIDEO

Watch this short video for a quick overview of the Bewinner Tiger 911 Voice Alarm Dialer.



Video 8.1: An 8-second overview of the Bewinner Tiger 911 Voice Alarm Dialer, demonstrating its physical appearance and basic components.

9. WARRANTY AND SUPPORT

Bewinner is committed to providing quality products and a pleasant shopping experience.

- **Product Quality:** Each product undergoes careful inspection from production to delivery to ensure quality.
- **Customer Support:** For any questions, technical assistance, or support needs, please refer to the contact information provided with your purchase or visit the official Bewinner store page.

