



[Manuals.plus](#) /

› [JONATHAN Y](#) /

› JONATHAN Y JYL7470B 3-Light Chrome LED Vanity Light Sconce Instruction Manual

JONATHAN Y JYL7470B

JONATHAN Y JYL7470B 3-Light Chrome LED Vanity Light Sconce Instruction Manual

Model: JYL7470B | Brand: JONATHAN Y

INTRODUCTION

This manual provides essential information for the safe installation, operation, and maintenance of your JONATHAN Y JYL7470B 3-Light Chrome LED Vanity Light Sconce. Please read these instructions thoroughly before beginning installation and retain them for future reference. This fixture features a polished chrome finish, clear seeded glass shades, and includes energy-efficient LED bulbs, designed for hardwired installation in various indoor settings such as bathrooms, hallways, and living rooms.



Image: The JONATHAN Y JYL7470B 3-Light Chrome LED Vanity Light Sconce, showcasing its design and illumination in a modern bathroom setting.

SAFETY INFORMATION

- **WARNING:** Risk of electric shock. Disconnect power at the fuse box or circuit breaker before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, and the National Electric Code (NEC).
- If you are unfamiliar with electrical wiring, it is recommended to consult a qualified, licensed electrician for installation.
- This fixture is designed for 120-volt applications and is ETL Listed, meeting UL standards for safety and quality.
- Do not install this fixture in wet locations. It is intended for indoor use only.
- Handle glass components with care to prevent breakage and injury.

PACKAGE CONTENTS

Verify that all components are present and undamaged before beginning installation. If any parts are missing or broken, contact customer service immediately.

- 1 x JYL7470B Vanity Light Fixture (Chrome finish)
- 3 x Clear Seeded Glass Shades
- 3 x LED Bulbs (E26 base, 2700K Warm White, 4W, 420 Lumens each)
- Mounting Hardware Kit (screws, wire nuts, mounting plate)
- Instruction Manual (this document)

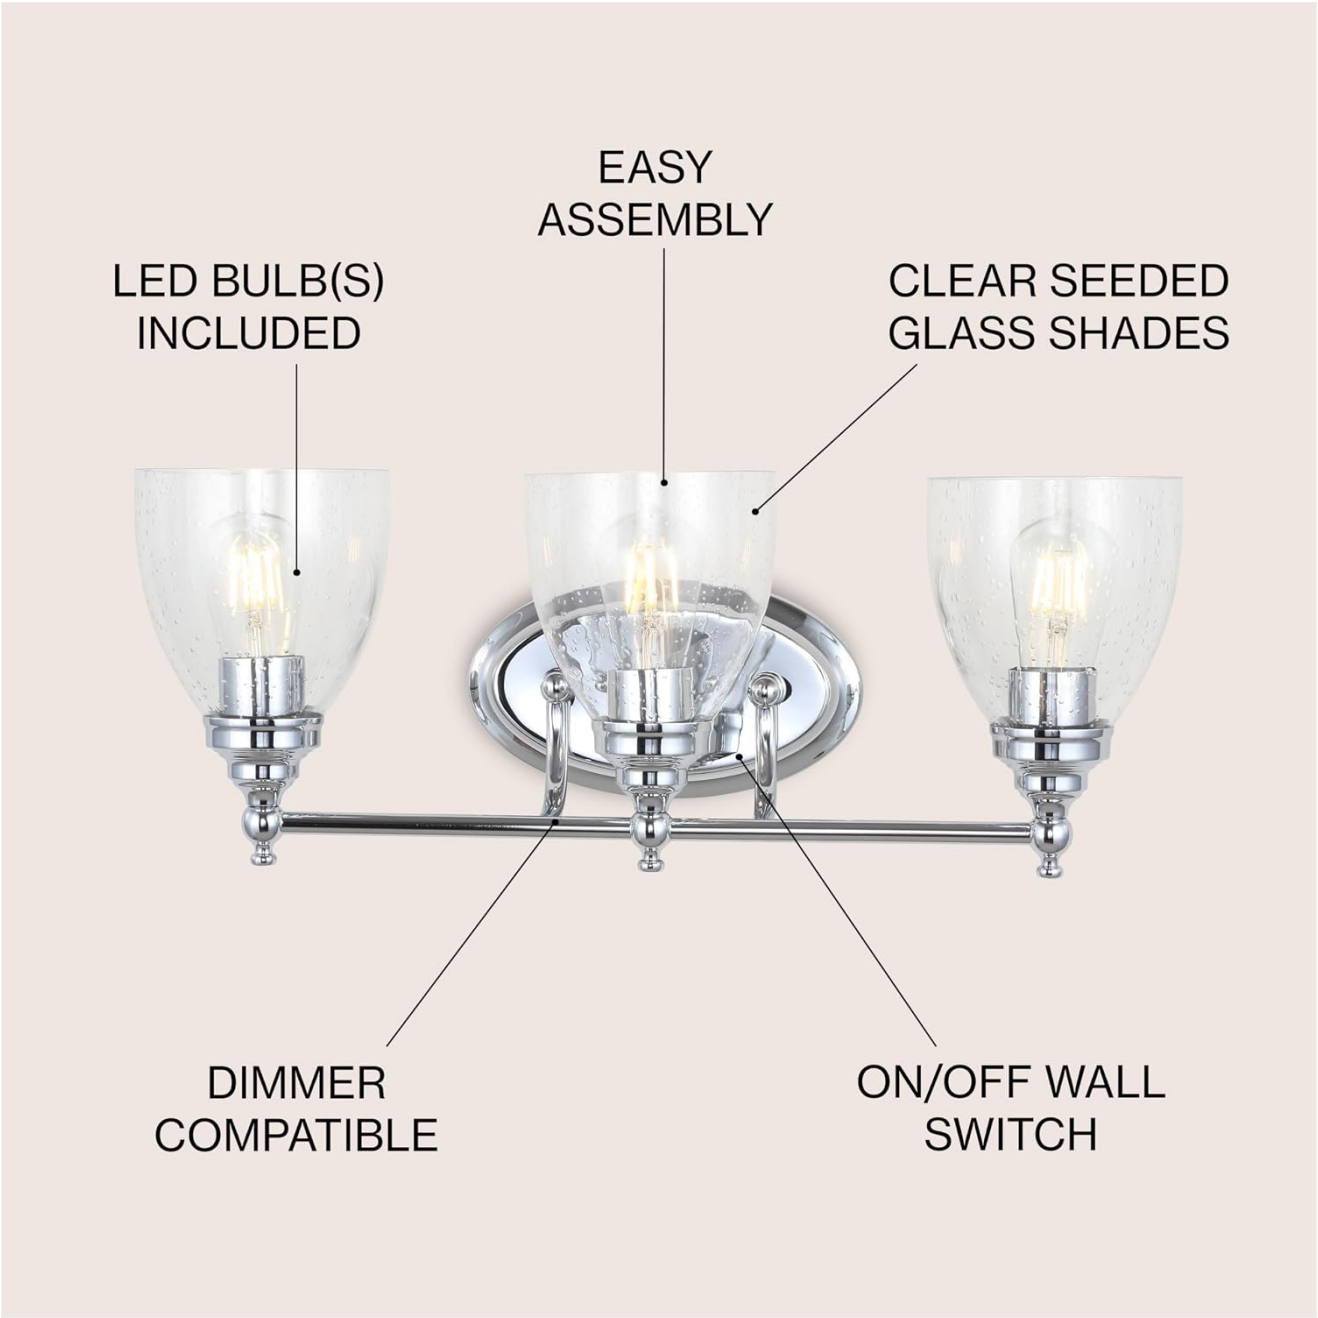


Image: Exploded view of the JYL7470B fixture highlighting LED bulbs, easy assembly, clear seeded glass shades, dimmer compatibility, and on/off wall switch functionality.

SPECIFICATIONS

Feature	Detail
Model Number	JYL7470B
Dimensions (L x W x H)	22.25" x 7.5" x 8.75"

Feature	Detail
Weight	5.32 Pounds
Material	Metal, Glass
Finish	Polished Chrome
Shade Material	Clear Seeded Glass
Light Source	LED (Bulbs Included)
Number of Lights	3
Bulb Base	E26
Voltage	120 Volts
Wattage (per bulb)	4W LED (60W incandescent equivalent)
Light Color	Warm White
Color Temperature	2700 Kelvin
Brightness (per bulb)	420 Lumens
Dimmable	Yes (with compatible dimmer switch)
Installation Type	Hardwired, Wall Mount
Indoor/Outdoor Use	Indoor Only
Certifications	ETL Listed, UL Standards



Image: Dimensional drawing of the JYL7470B fixture, indicating its length, width, and height for installation planning.

SETUP AND INSTALLATION

This fixture requires hardwired installation. Due to the nature of electrical wiring, **professional installation by a licensed electrician is strongly recommended** to ensure safety and compliance with electrical codes.

General Installation Steps (Consult PDF for detailed diagrams):

1. **Turn off Power:** Locate the circuit breaker or fuse box and turn off the power to the junction box where the fixture will be installed. Verify power is off using a voltage tester.
2. **Prepare Mounting:** Attach the mounting plate to the junction box using the provided screws.
3. **Wire Connections:** Connect the fixture's wires to the corresponding house wires (black to black, white to white, ground to ground) using wire nuts. Ensure all connections are secure.
4. **Mount Fixture:** Carefully tuck the wires into the junction box and secure the fixture to the mounting plate with the provided screws.
5. **Install Shades and Bulbs:** Gently attach the glass shades to the fixture. Screw in the included LED bulbs into the E26 sockets. Do not overtighten.
6. **Restore Power:** Turn the power back on at the circuit breaker or fuse box.

For detailed, step-by-step instructions and diagrams, please refer to the official Installation Manual PDF: [Download Installation Manual \(PDF\)](#)

Your browser does not support the video tag.

Video: A close-up view of the JONATHAN Y JYL7470B vanity light fixture, demonstrating its construction and the seeded glass detail. This video provides a visual overview of the product's aesthetic and components.

OPERATING INSTRUCTIONS

The JYL7470B vanity light is designed for simple operation via a standard wall switch. It is also compatible with most LED-compatible dimmer switches, allowing you to adjust the light output to your desired ambiance.

- **On/Off:** Use your existing wall switch to turn the fixture on or off.
- **Dimming:** If connected to a compatible dimmer switch, rotate or slide the dimmer control to adjust the brightness level of the LED bulbs. Ensure your dimmer switch is rated for LED lighting to prevent flickering or damage.

MAINTENANCE

Regular cleaning will help maintain the appearance and performance of your light fixture.

- **Cleaning:** Always disconnect power before cleaning. Use a soft, dry, or slightly damp cloth to wipe down the metal and glass surfaces. Avoid abrasive cleaners, solvents, or polishes as they may damage the finish.
- **Bulb Replacement:** The included LED bulbs have a long lifespan. If replacement is necessary, ensure the power is off. Allow bulbs to cool before handling. Use E26 base LED bulbs that are compatible with dimming if a dimmer switch is installed.
- **Inspection:** Periodically check for any loose connections or signs of wear. If any issues are found, consult a qualified electrician.

TROUBLESHOOTING

If your fixture is not operating correctly, refer to the following common issues and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	1. Power is off. 2. Loose wire connections. 3. Faulty bulb.	1. Check circuit breaker/fuse. 2. Ensure all wire connections are secure (power off first). 3. Replace bulb with a known working one.
Light flickers or dims incorrectly.	1. Incompatible dimmer switch. 2. Loose bulb.	1. Ensure dimmer is LED-compatible. Consult an electrician if unsure. 2. Tighten bulb securely.
Glass shade is broken or chipped.	Physical damage.	Contact customer support for replacement parts.

If you are unable to resolve an issue, please contact JONATHAN Y customer support.

WARRANTY AND SUPPORT

Manufacturer Warranty:

This JONATHAN Y product is covered by a **30-day manufacturer warranty for defects only**. This warranty does not cover normal wear and tear. Any visible damages not noted upon delivery will be considered customer damage and will not be warranted. All products are inspected upon arrival. Worn, dirty, or stained merchandise will not be accepted for warranty claims.

For warranty information or to inquire about support, please contact the internet customer service center where you purchased the product.

Additional Support:

For further assistance, product information, or to explore other JONATHAN Y lighting solutions, please visit the official

JONATHAN Y store:

[Visit the JONATHAN Y Store on Amazon](#)