



[Manuals.plus](#) /

> [ZUMIMALL](#) /

> ZUMIMALL Security Cameras Wireless Outdoor with Magnetic Mount, 2K Outdoor Camera Wireless Battery Powered, 2.4G WiFi Cameras for Home Security Indoor, 3MP Color Night Vision/Siren/PIR/AI/Cloud/Alexa White-Single Camera

ZUMIMALL F5

ZUMIMALL Security Camera User Manual

Model: F5

Brand: ZUMIMALL

1. PRODUCT OVERVIEW

The ZUMIMALL F5 Security Camera is a wireless, battery-powered outdoor camera designed for comprehensive home security. It features 2K resolution, color night vision, two-way audio, PIR motion detection, and AI analysis for accurate alerts. Its versatile design allows for both magnetic and bracket mounting, making it suitable for various indoor and outdoor environments. The camera operates on 2.4G WiFi and offers flexible storage options including cloud and local SD card storage.



Figure 1.1: ZUMIMALL F5 Security Camera with its magnetic mount.

2. WHAT'S IN THE BOX

Carefully unpack the box and ensure all items are present and in good condition. If any items are missing or damaged, please contact ZUMIMALL customer support.

- ZUMIMALL F5 Security Camera (1)
- Magnetic Mount (1)
- Bracket Mount (1)
- Charging Cable (1)
- Screws Set & Screwdriver (1)
- 3M Tape (2)
- Quick User Guide (1)



Figure 2.1: All components included in the ZUMIMALL F5 package.

3. SETUP AND INSTALLATION

Before installation, ensure the camera is fully charged using the provided USB cable. The LED indicator will turn blue when charging and off when fully charged. The ZUMIMALL F5 offers two primary installation methods: magnetic mounting for easy placement and bracket mounting for more secure, permanent fixture.

3.1 Magnetic Mount Installation

The magnetic mount allows for quick and flexible placement on any magnetic surface or using the included 3M tape for non-magnetic surfaces. This method is ideal for indoor use or temporary outdoor placement.

1. Clean the desired installation surface to ensure it is dry and free of dust.
2. Attach the magnetic base to the surface using the 3M adhesive tape or directly to a magnetic surface.
3. Align the camera with the magnetic base until it securely snaps into place.
4. Adjust the camera angle as needed.

3.2 Bracket Mount Installation

For a more secure and permanent installation, especially outdoors, use the bracket mount and screws.

1. Choose a suitable location for installation. Mark the screw positions on the wall using the bracket as a template.
2. Drill holes at the marked positions. Insert wall anchors if necessary.
3. Secure the bracket to the wall using the provided screws.
4. Attach the camera to the bracket by screwing it onto the threaded post.
5. Adjust the camera angle and tighten the locking ring to secure its position.

Manage Recordings

You can easily view, download, and share everything that happened on any specific day.



Video Record



Video Record



Click to Share



Loop Recording

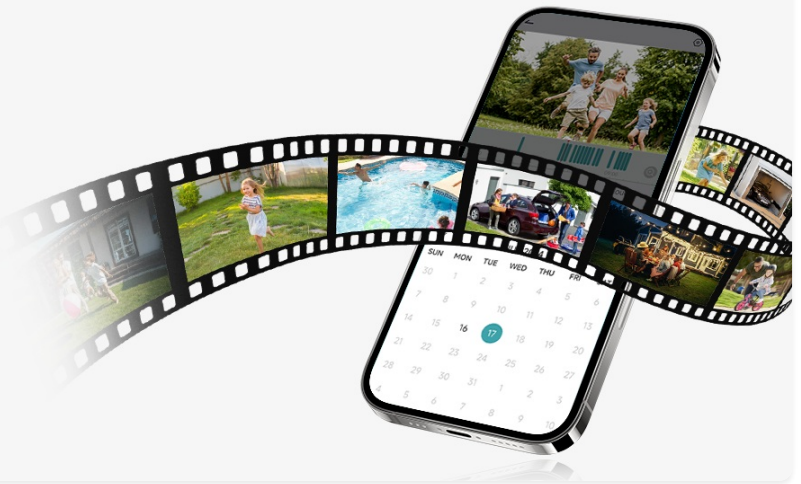


Figure 3.1: The ZUMIMALL F5 supports both magnetic and bracket installation for versatile placement.



Figure 3.2: Detailed steps for magnetic and bracket installation, including device charging.

4. APP CONNECTION

To utilize the full features of your ZUMIMALL F5 camera, download and connect it to the ZUMIMALL app.

1. Download the ZUMIMALL app from the App Store (iOS) or Google Play Store (Android).
2. Register for a new account or log in if you already have one.
3. Tap the '+' icon in the app to add a new device.
4. Select your camera model (F5) from the list.
5. Follow the on-screen instructions to connect the camera to your 2.4GHz WiFi network. This typically involves scanning a QR code displayed on your phone with the camera.
6. Once connected, you can name your camera and begin live viewing and configuring settings.



Figure 4.1: Easy connection steps for the ZUMIMALL app.

Video 4.1: This video demonstrates how to connect the ZUMIMALL F5 security camera to the app.

Video 4.2: This video provides instructions on connecting the ZUMIMALL app with the camera.

5. KEY FEATURES

5.1 2K Resolution & 130° Wide Angle View

The ZUMIMALL F5 camera captures video in crisp 2K resolution, providing clear and detailed images. Its 130-degree wide-angle lens ensures a broad field of view, minimizing blind spots and offering comprehensive coverage of your monitored area.

5.2 Color Night Vision & Spotlight

Equipped with advanced infrared lights and a built-in spotlight, the camera delivers clear color night vision even in low-light conditions. The spotlight can be activated automatically upon motion detection to illuminate the area and deter intruders.

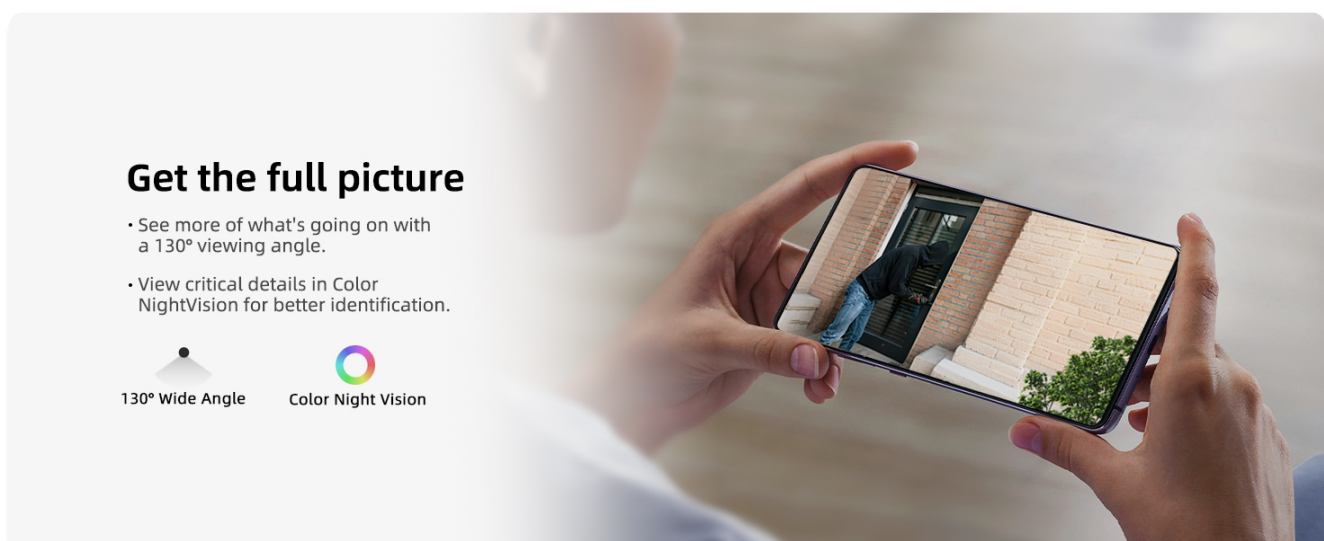


Figure 5.1: Experience clear color night vision with the integrated spotlight.

5.3 Two-Way Audio & Siren

Communicate directly with visitors or deter unwanted guests using the integrated microphone and speaker for real-time two-way audio. The camera also features an instant siren and flashing white light that can be activated manually or automatically upon detection to scare off intruders.

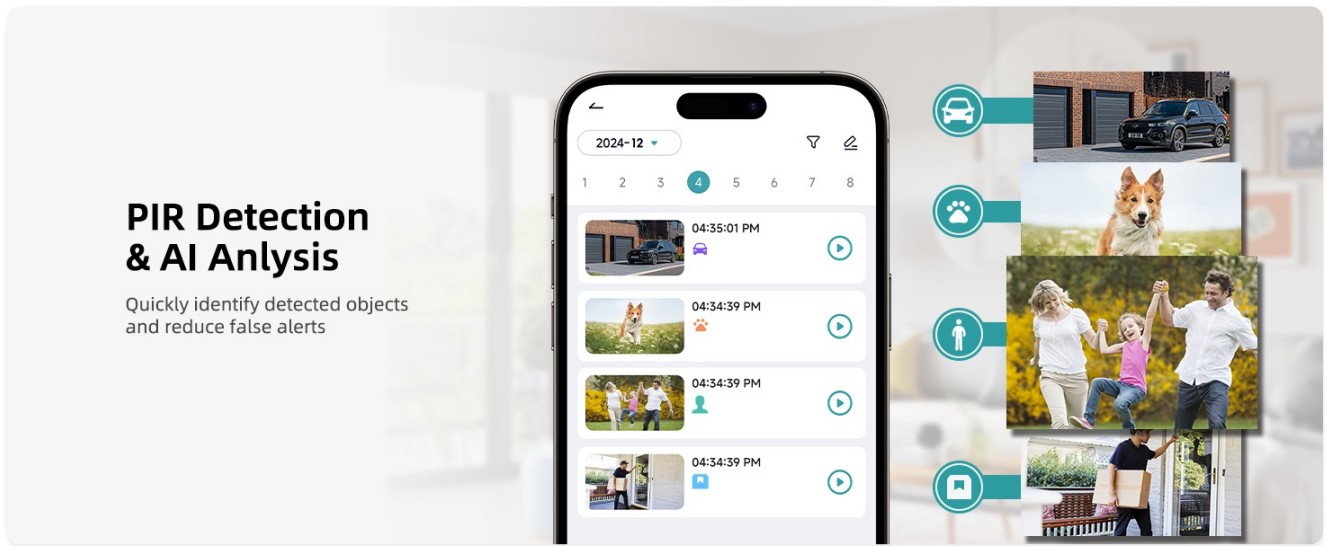


Figure 5.2: Engage in two-way conversations with the built-in microphone and speaker.

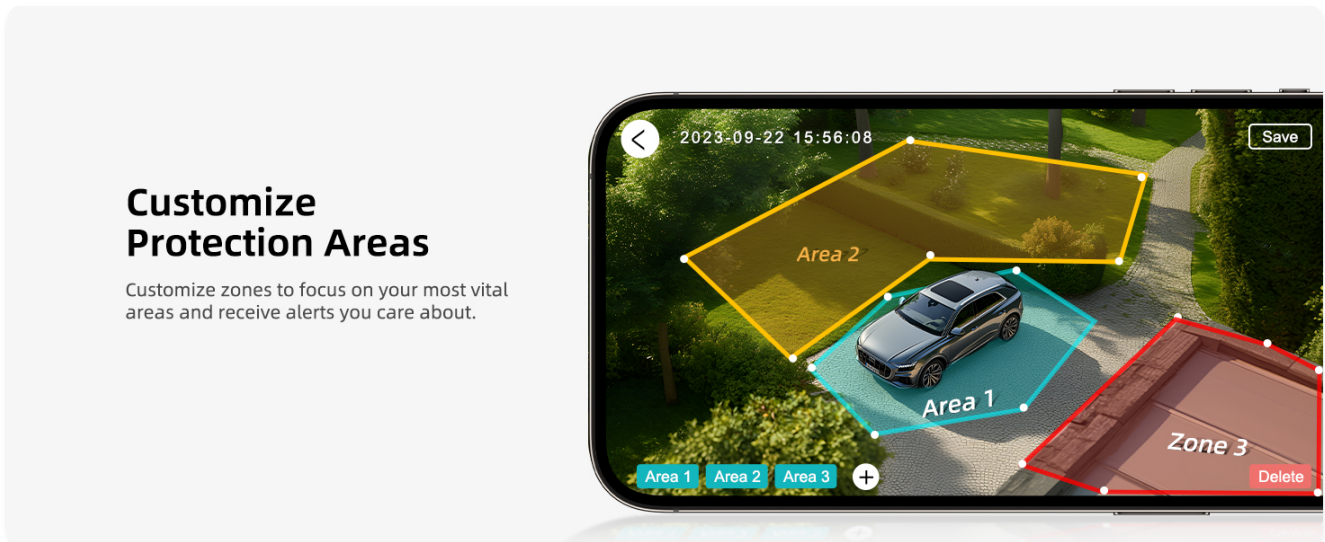


Figure 5.3: Deter potential threats with integrated spotlights and sound alarms.

5.4 Storage Options: Cloud & Local (SD Card)

The camera supports both cloud storage and local storage via a Micro SD card (up to 128GB, not included). A 7-day loop cloud recording plan for 6-second video clips is available, ensuring your privacy through encrypted cloud services.

Secure Local Cloud Storage

- Up to 128 GB of local storage for approximately 200 hours of video recording. Memory Card is not included.
- No charge for the detection and basic recording features, 6s recording per video of 7-day loop.

Paid cloud storage is increased to 30-day loops with no recording time limit.



Figure 5.4: Flexible storage options including free basic cloud storage and local SD card support.

5.5 AI Analysis & Smart Assistant Compatibility

The camera utilizes AI analysis to accurately identify people, pets, vehicles, and packages, reducing false alarms. You can customize up to 6 detection areas for precise monitoring. It is also compatible with Amazon Alexa and Google Assistant for convenient voice-activated viewing.

Indoor & Outdoor

Wire-free design makes it easily mountable with a quick setup process, taking just a few minutes.



Magnetic



Bracket



Figure 5.5: Advanced PIR detection and AI analysis for accurate alerts.

Your Privacy, Our Priority

Protects your family's privacy with encrypted video, two-factor authentication, and advanced data security.

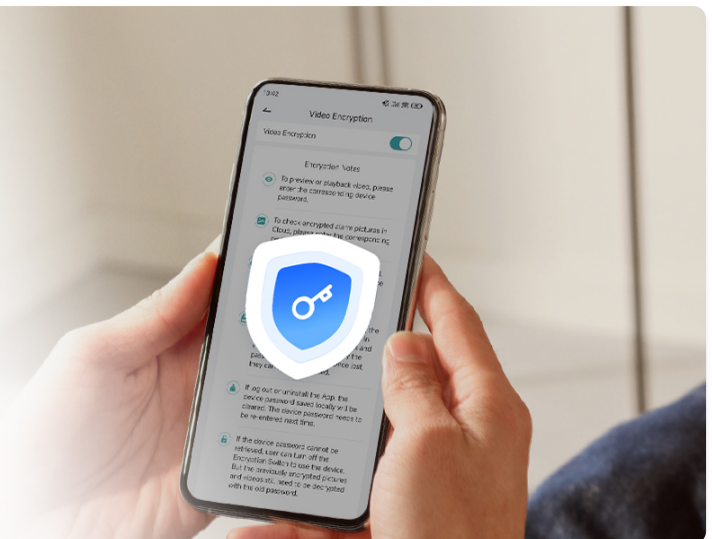



Figure 5.6: Customize specific protection areas to focus on vital zones.

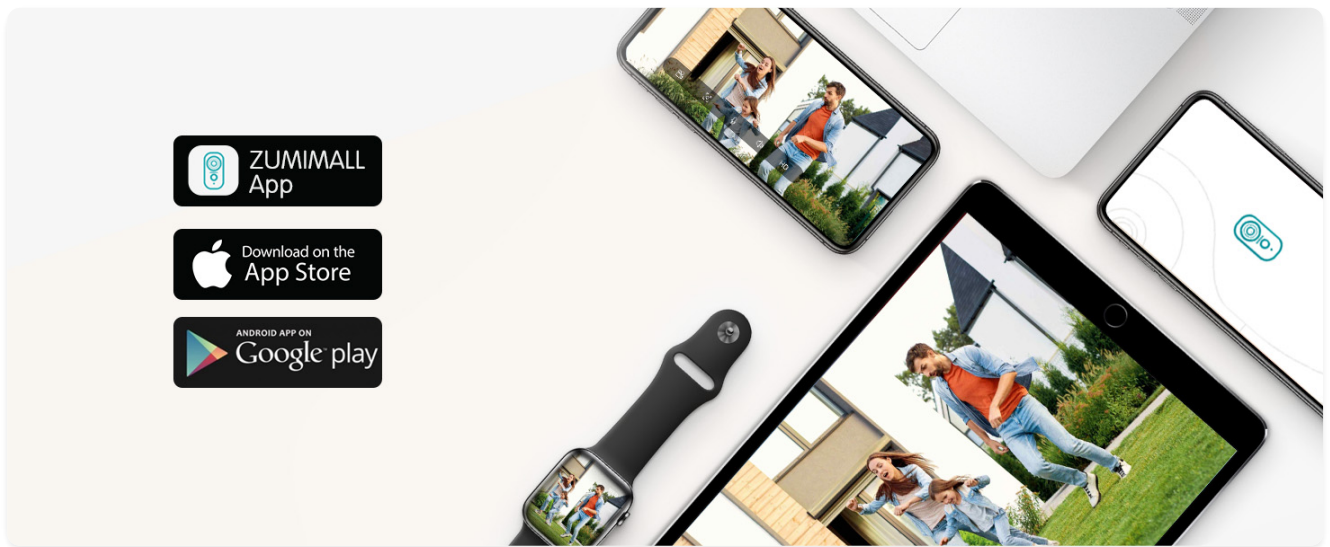


Figure 5.7: Seamless integration with smart assistants for hands-free control.

5.6 IP66 Weatherproof Design

Built with IP66 waterproof materials, the ZUMIMALL F5 camera is designed to withstand various weather conditions, including rain, humidity, and extreme temperatures ranging from -4°F to 120°F (-20°C to 50°C), ensuring reliable performance year-round.

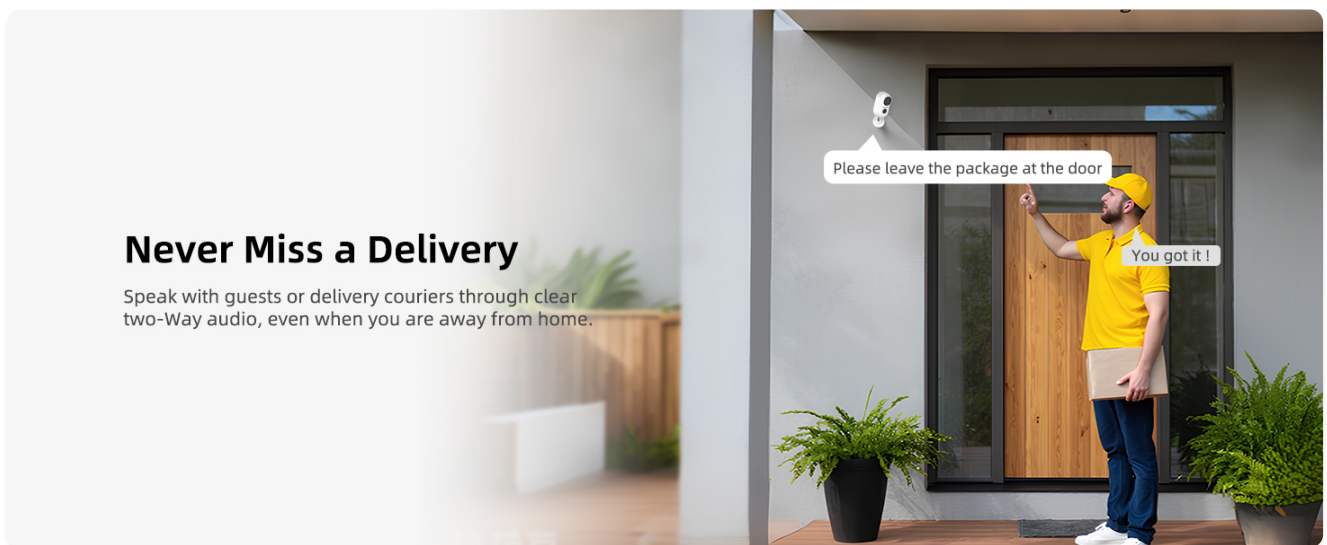


Figure 5.8: The IP66 weatherproof design ensures durability in various environments.

5.7 Data Privacy and Security

ZUMIMALL prioritizes your privacy with advanced data encryption technology for all video recordings. Two-factor authentication and robust data security measures are in place to protect your family's privacy.

View 4 Security Cameras Simultaneously

You can view four devices at the same time on the ZUMIMALL app, and won't miss a single corner.

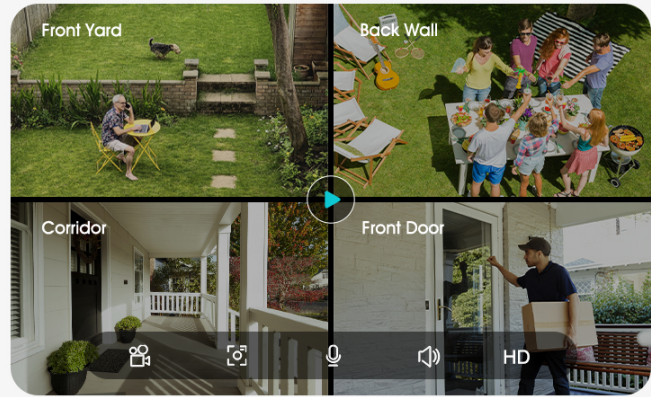


Figure 5.9: Your privacy is protected with advanced encryption technology.

6. OPERATION

6.1 Adjusting Recording Time and Sensitivity

Within the ZUMIMALL app, you can customize the recording duration for motion-triggered events and adjust the detection sensitivity to suit your environment. Higher sensitivity will detect more subtle movements but may also lead to more frequent alerts.

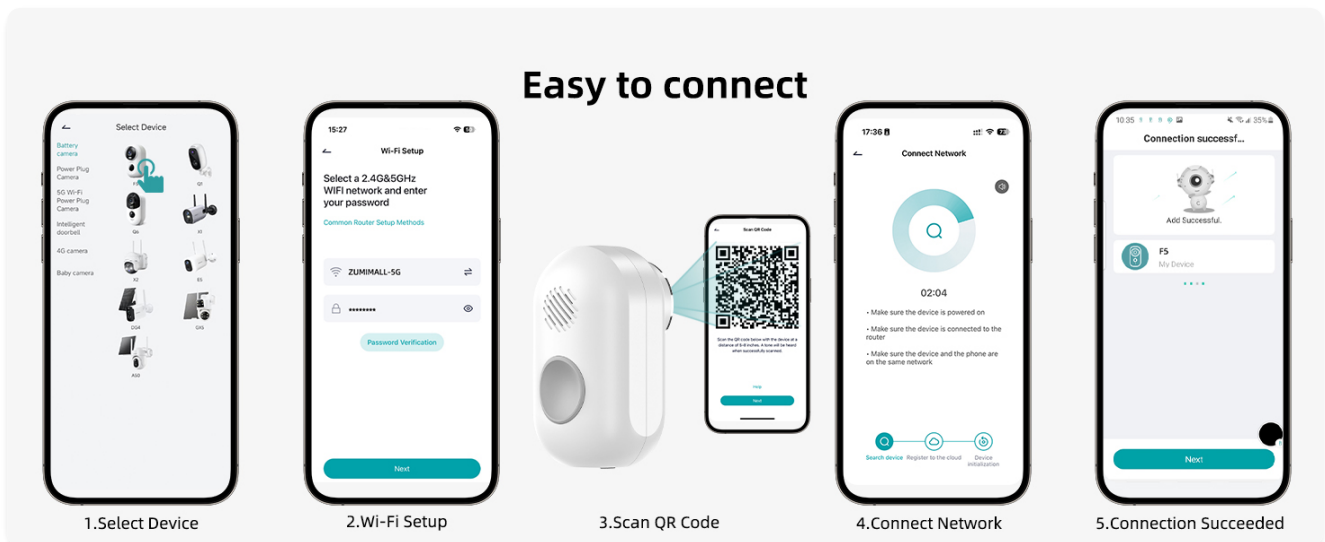


Figure 6.1: Customize recording duration and motion detection sensitivity in the app.

6.2 Multi-User Sharing

Easily share camera access with family and friends through the ZUMIMALL app using a simple QR code, allowing multiple users to monitor the property simultaneously.

Multi-Users Sharing

Easily grant unlimited camera access to family and friends with just one QR code, ensuring better monitoring and security.



Figure 6.2: Share camera access with multiple users for collaborative monitoring.

7. MAINTENANCE AND TROUBLESHOOTING

7.1 Battery Life Optimization

The ZUMIMALL F5 is battery-powered. To optimize battery life, consider the following:

- Reduce motion detection sensitivity if you experience excessive false alarms.
- Adjust the recording duration to shorter clips if longer recordings are not essential.
- Ensure the camera is placed in an area with good WiFi signal strength to prevent excessive battery drain from connection attempts.
- For continuous power, consider purchasing a compatible ZUMIMALL solar panel (sold separately).

7.2 Connectivity Issues

If your camera struggles to connect or maintain a stable connection:

- Ensure your WiFi network is 2.4GHz. The camera does not support 5GHz WiFi.
- Check the distance between the camera and your WiFi router. Move the camera closer or consider a WiFi extender.
- Restart your router and the camera.
- Verify your WiFi password is entered correctly in the app.

7.3 Motion Detection Problems

If the camera is not detecting motion or is generating too many false alarms:

- Adjust the motion detection sensitivity in the app (refer to Section 6.1).
- Define specific detection areas to exclude busy public areas or moving foliage.
- Ensure there are no obstructions directly in front of the PIR sensor.
- Check the camera's battery level; low battery can affect performance.

7.4 SD Card Issues

If your Micro SD card is not recording or is difficult to insert/remove:

- Ensure the SD card is inserted correctly with the gold contacts facing the camera.
- Use a small, non-sharp object (like a fingernail or plastic tool) to gently push the card in until it clicks, and to eject it.
- Format the SD card through the camera settings in the ZUMIMALL app.
- Ensure the SD card is a genuine Class 10 or higher, up to 128GB.

8. SPECIFICATIONS

Detailed technical specifications for the ZUMIMALL F5 Security Camera:

Feature	Specification
Model Number	F5
Video Capture Resolution	3 MP (2K)
Field Of View	130 Degrees
Connectivity Technology	Wireless (2.4G Wi-Fi)
Power Source	Battery Powered
Battery Capacity	6000 Milliampere Hour (mAh)
Night Vision Range	33 Feet
International Protection Rating	IP66
Operating Temperature	-4°F to 120°F (-20°C to 50°C)
Storage Support	Max 128GB Micro SD Card (not included)
Dimensions (L x W x H)	2.2 x 2.2 x 3.9 inches
Item Weight	0.634 ounces
Control Method	App



Figure 8.1: Key components and dimensions of the ZUMIMALL F5 camera.

9. WARRANTY AND SUPPORT

ZUMIMALL is committed to providing high-quality products and excellent customer service. For any inquiries, technical support, or warranty claims, please contact ZUMIMALL customer support directly.

- **Online Support:** ZUMIMALL offers one-on-one online support to assist with any issues.
- **User Manuals:** Additional user manuals and installation guides are available in PDF format for download.
- **Manufacturer:** ZUMIMALL

For more information and support resources, visit the official ZUMIMALL store on Amazon: [ZUMIMALL Store](#)