

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Manuals.plus /

› [Pet Union](#) /

› Pet Union PT0Z1 Premium Dog Training Shock Collar User Manual

## Pet Union YA-J551-F2QV

# Pet Union PT0Z1 Premium Dog Training Shock Collar User Manual

Model: YA-J551-F2QV | Brand: Pet Union

## INTRODUCTION

---

The Pet Union PT0Z1 Premium Dog Training Shock Collar is an advanced e-collar designed to assist both expert trainers and first-time pet owners in behavioral correction. This fully waterproof training system offers a wide range of features to help address common dog behaviors such as barking, walking issues, leash training, sitting, aggression, and general obedience.

It features a wireless remote with a 1200ft range and four training modes: tone (beep), vibration, and static stimulation. The static and vibration modes offer 1-100 levels of customization, allowing for precise control tailored to your dog's needs. The collar is suitable for dogs weighing 10 lbs and up, and can even be used to train two dogs simultaneously.

# WATER PROOF



Image: The Pet Union PT0Z1 collar is designed to fit all dogs from 10 to 100 lbs, making it versatile for various breeds and sizes.

## PRODUCT COMPONENTS

---

Your Pet Union PT0Z1 Premium Dog Training Shock Collar package includes the following items:

- 1 x Dog Training Collar Receiver (Charcoal)
- 1 x Wireless Remote Transmitter
- 1 x Adjustable Nylon Collar Strap
- 1 x USB Charging Cable
- 1 x Power Adapter
- 2 x Sets of Contact Points (short and long)
- 2 x Sets of Silicone Conductive Covers
- 1 x Test Light Tool
- 1 x User Manual (this document)



## 2. Pairing the Remote and Receiver

The receiver and remote are typically pre-paired from the factory. If they are not responding to each other, follow these steps to re-pair them:

1. Ensure both the remote and the collar receiver are turned off.
2. Turn on the remote transmitter.
3. Press and hold the power button on the collar receiver until the indicator light flashes rapidly.
4. While the receiver light is flashing, press any mode button (Tone, Vibrate, or Shock) on the remote transmitter.
5. The receiver light will stop flashing and remain solid, indicating successful pairing.



Image: Visual guide for pairing the remote and receiver. Note that the receiver and remote are usually pre-paired out of the box.

## 3. Fitting the Collar

Proper fit of the collar is crucial for effective and safe training.

- Place the collar around your dog's neck, ensuring the contact points are positioned underneath, touching the skin.
- The collar should be snug enough that you can fit one or two fingers comfortably between the strap and your dog's neck. It should not be too loose, as this can reduce the effectiveness of the static

correction, or too tight, which could cause discomfort or skin irritation.

- Trim any excess strap length if necessary to prevent snagging or chewing.

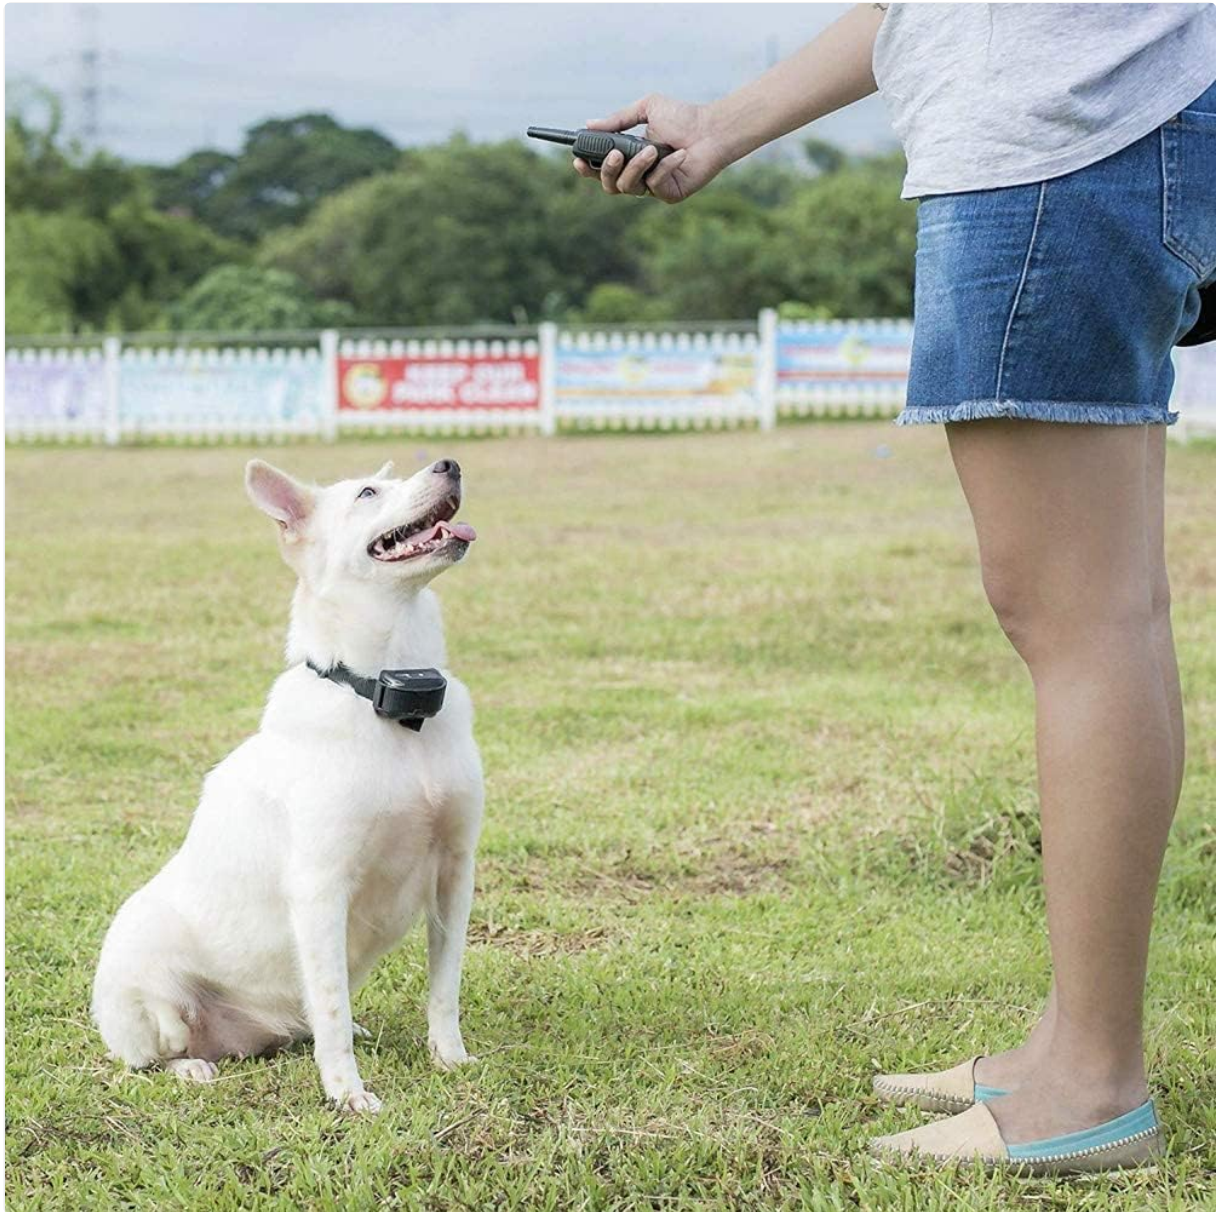


Image: A dog wearing the training collar correctly, demonstrating proper fit and positioning.

## OPERATING INSTRUCTIONS

---

### Training Modes

The Pet Union PT0Z1 offers four distinct training modes to suit various training needs:

- **Tone (Beep) Mode:** Provides an audible warning sound. Ideal for initial training and gaining your dog's attention.
- **Vibration Mode:** Delivers a gentle vibration. Useful for dogs sensitive to static or as a progressive step from tone. Adjustable from 1-100 levels.
- **Static Stimulation Mode:** Provides a static correction. *This mode is only recommended for emergency situations and is not advised as a form of positive behavioral training. Use with caution and at the lowest effective level.*
- **Light Mode:** Activates a light on the collar, useful for locating your dog in low-light conditions.

### Adjusting Levels and Using the Remote

The remote transmitter features a large LCD display with a blue backlight for clear visibility day or night.

- Use the **Mode** button to cycle through the different training modes.
- Use the **Up/Down** buttons to adjust the intensity level (1-100) for Vibration and Static Stimulation modes.
- Press the corresponding button (Tone, Vibrate, or Shock) to deliver the chosen correction.

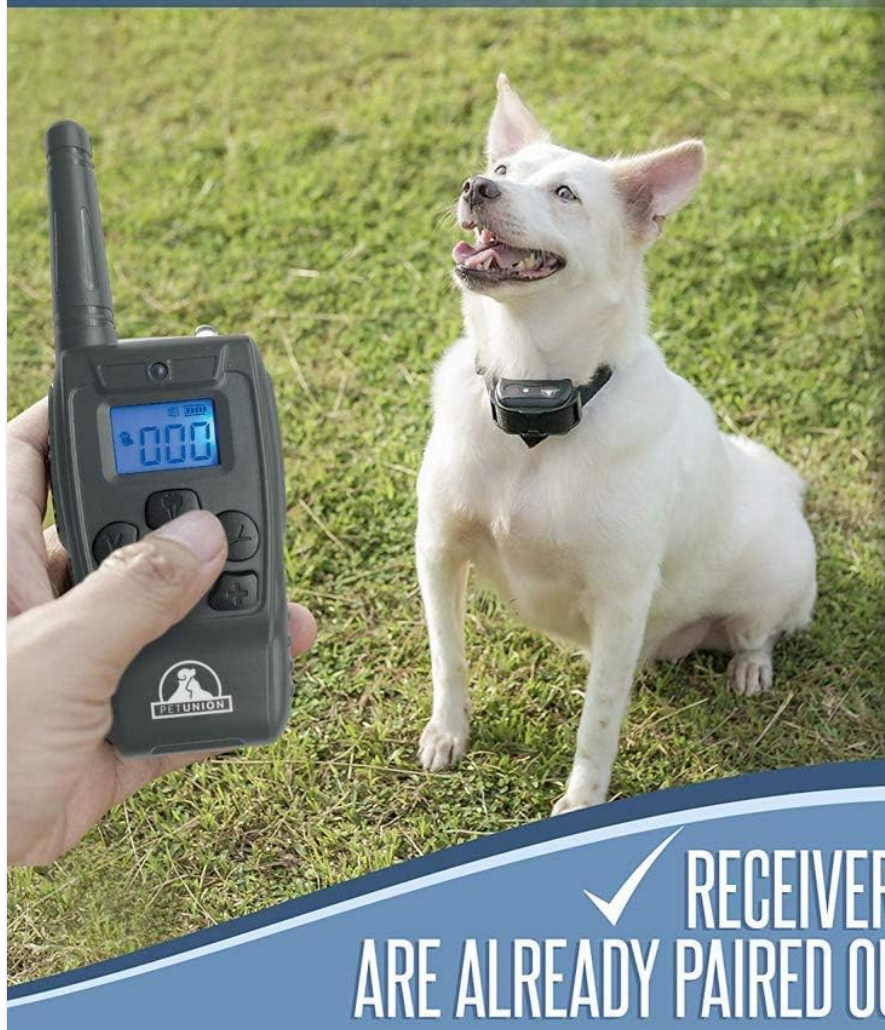


Image: The remote transmitter with its clear LCD display, allowing for easy adjustment of training levels.

### Training Multiple Dogs

The Pet Union PT0Z1 system supports training up to two dogs simultaneously with a single remote. Additional collar receivers are sold separately.

# EASY TO PAIR



1



*Turn Remote  
On*

2



*Hold Antenna  
To PowerSync  
Sensor*

3



*Press The  
Action Button*

✓ **RECEIVER AND REMOTE  
ARE ALREADY PAIRED OUT OF THE BOX**

Image: The system allows for training up to two dogs at once, making it convenient for multi-pet households.

## MAINTENANCE

### Waterproofing

The collar receiver is fully waterproof, allowing your dog to swim or play in water without damaging the device. However, ensure the charging port cover is securely sealed before exposing the collar to water. The remote transmitter is not waterproof and should be kept dry.

# TRAIN UP TO 2-DOGS TOGETHER



Image: The collar receiver is designed to be fully waterproof, suitable for dogs who enjoy water activities.

## Cleaning and Storage

- Regularly inspect your dog's neck for any signs of irritation or sores from the contact points. If irritation occurs, discontinue use until the skin heals.
- Clean the collar receiver and contact points with a damp cloth. Avoid using harsh chemicals or abrasive cleaners.
- Store the device in a cool, dry place when not in use.
- For optimal battery life, fully charge the devices at least once a month if not in regular use.

## TROUBLESHOOTING

Problem	Possible Cause	Solution
Collar not responding to remote	Not paired; low battery; out of range.	Re-pair the devices (see Setup Guide); charge both devices; ensure within 1200ft range.

Problem	Possible Cause	Solution
No static/vibration correction	Contact points not touching skin; level set too low; test light not used correctly.	Adjust collar fit; increase intensity level; use test light to verify function (refer to full manual for test light instructions).
Collar indicator light not on	Collar is off; low battery.	Turn on collar; charge collar.
Shortened range	Environmental interference; low battery.	Avoid areas with strong electromagnetic fields; charge both devices.

## SPECIFICATIONS

---

**Model Number:** YA-J551-F2QV

**Brand:** Pet Union

**Color:** Charcoal

**Item Weight:** 13.1 ounces

**Item Package Dimensions:** 7.4 x 5.87 x 1.85 inches

**Range:** Up to 1200 feet

**Training Modes:** Tone, Vibration (1-100 levels), Static Stimulation (1-100 levels), Light

**Waterproof Rating:** Collar Receiver is fully waterproof

**Battery:** Rechargeable Lithium-ion (for both remote and receiver)

**Suitable for Dogs:** 10 lbs and up

## WARRANTY AND SUPPORT

---

For warranty information, product support, or any inquiries not covered in this manual, please contact Pet Union customer service directly.

You can often find contact details on the product packaging, the official Pet Union website, or through the retailer where you purchased the product.

**Pet Union Store:** [Visit the Pet Union Store on Amazon](#)