Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

MAYTONI DECORATIVE LIGHTING DL008-2-02-B

Maytoni DL008-2-02-B Modern Black Recessed Downlight User Manual

Model: DL008-2-02-B | Brand: MAYTONI DECORATIVE LIGHTING

1. Important Safety Information

Please read these instructions carefully before installation and use. Keep this manual for future reference.

- **Electrical Safety:** Installation must be performed by a qualified electrician in accordance with all local and national electrical codes. Always disconnect power at the main circuit breaker before installation, maintenance, or bulb replacement.
- **Product Use:** This downlight is designed for indoor use only (IP20 rating). Do not expose to moisture or direct water.
- **Bulb Type:** Use only GU10 bulbs, with a maximum wattage of 50W per bulb. Do not exceed the specified wattage.
- **Ventilation:** Ensure adequate ventilation around the fixture. Do not cover the fixture with insulating material unless specifically rated for such use.
- **Handling:** Handle the product with care. Avoid dropping or subjecting it to strong impacts.

2. Package Contents

Verify that all components are present before beginning installation:

- 1 x Maytoni DL008-2-02-B Recessed Downlight Unit
- Mounting Clips/Springs (pre-attached or included)
- Instruction Manual (this document)

Note: GU10 bulbs are not included and must be purchased separately.

3. Specifications

Feature	Specification
Brand	MAYTONI DECORATIVE LIGHTING
Model Number	DL008-2-02-B

Feature	Specification
Dimensions (L x W x H)	24.5 cm x 12.6 cm x 7.8 cm (9.65 in x 4.96 in x 3.07 in)
Recessed Depth	70 mm (2.76 in)
Cutout Dimensions (L x W)	215 mm x 95 mm (8.46 in x 3.74 in)
Weight	0.45 kg (0.99 lbs)
Material	Metal
Color	Black
Number of Bulbs	2 (GU10 type, not included)
Max Wattage per Bulb	50 Watts
Voltage	230 Volts (AC)
IP Rating	IP20 (Indoor use only)
Adjustability	45° rotation angle for light direction
Insulation	Double insulation for fire protection

All dimensions are approximate and subject to minor manufacturing variations.

4. Setup and Installation

Before you begin: Ensure the power supply is disconnected at the main circuit breaker. This product requires professional installation.

1. **Prepare the Ceiling:** Mark the desired location for the downlight. Using the specified cutout dimensions (215mm x 95mm), carefully cut an opening in the ceiling. Ensure there is sufficient space above the ceiling for the fixture (minimum recessed depth of 70mm).
2. **Wiring:** Connect the electrical wires from the ceiling to the terminal block of the downlight fixture. Ensure correct polarity (Live, Neutral, Earth if applicable, though this product features double insulation). Secure all connections properly.
3. **Insert Bulbs:** Gently insert two GU10 bulbs into the lamp holders. Twist them clockwise until they are securely seated.

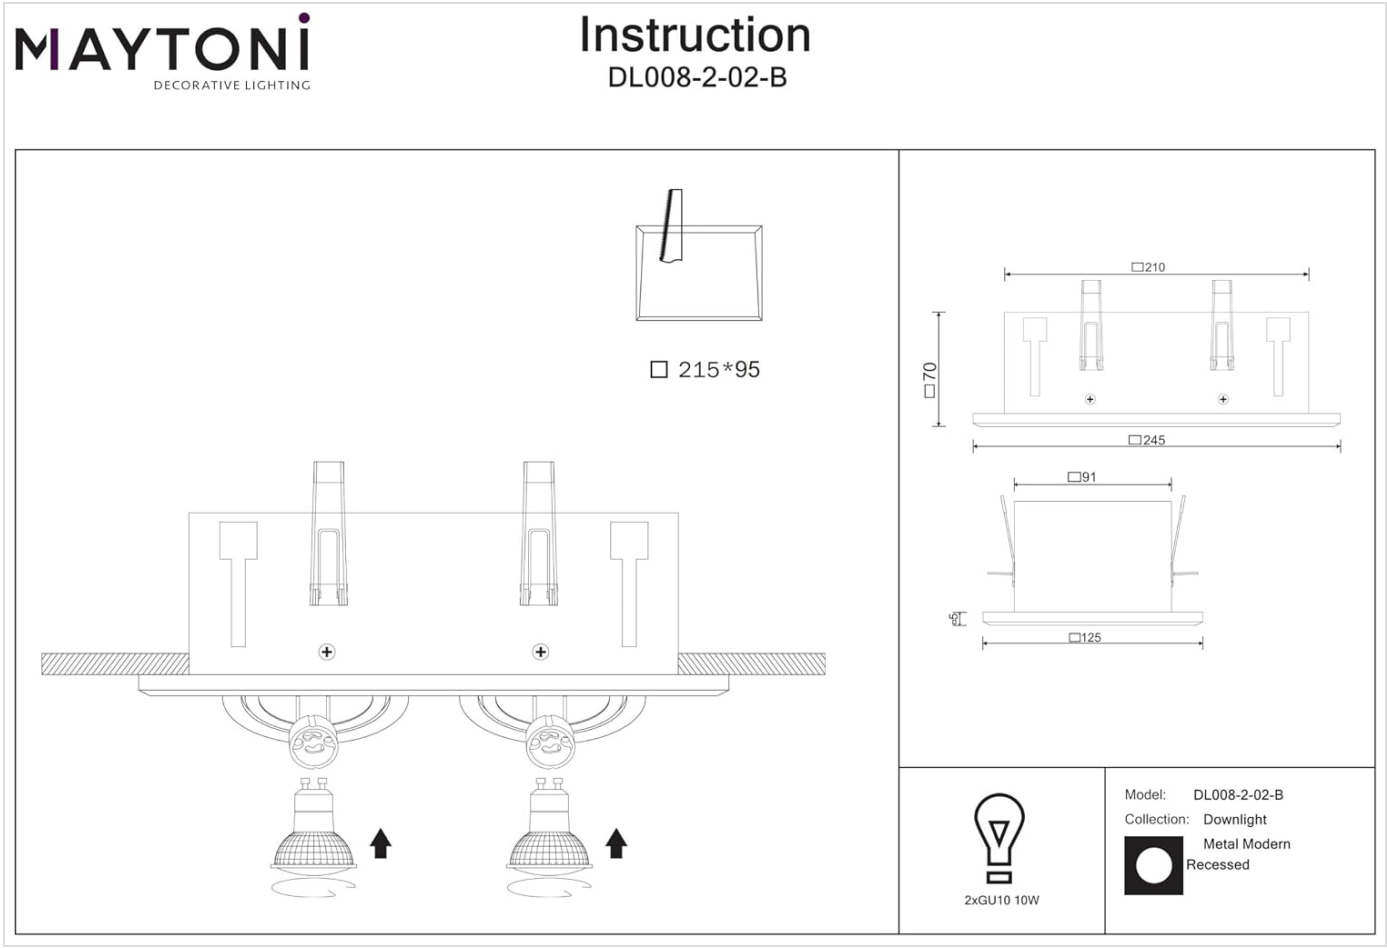


Figure 1: Installation diagram illustrating the cutout dimensions (215x95mm) and the process of inserting GU10 bulbs into the downlight fixture. The diagram also shows the overall dimensions of the fixture.

4. **Mount the Downlight:** Fold the spring clips on the sides of the downlight upwards. Carefully push the downlight unit into the prepared ceiling cutout. The spring clips will automatically engage and secure the fixture in place against the ceiling.

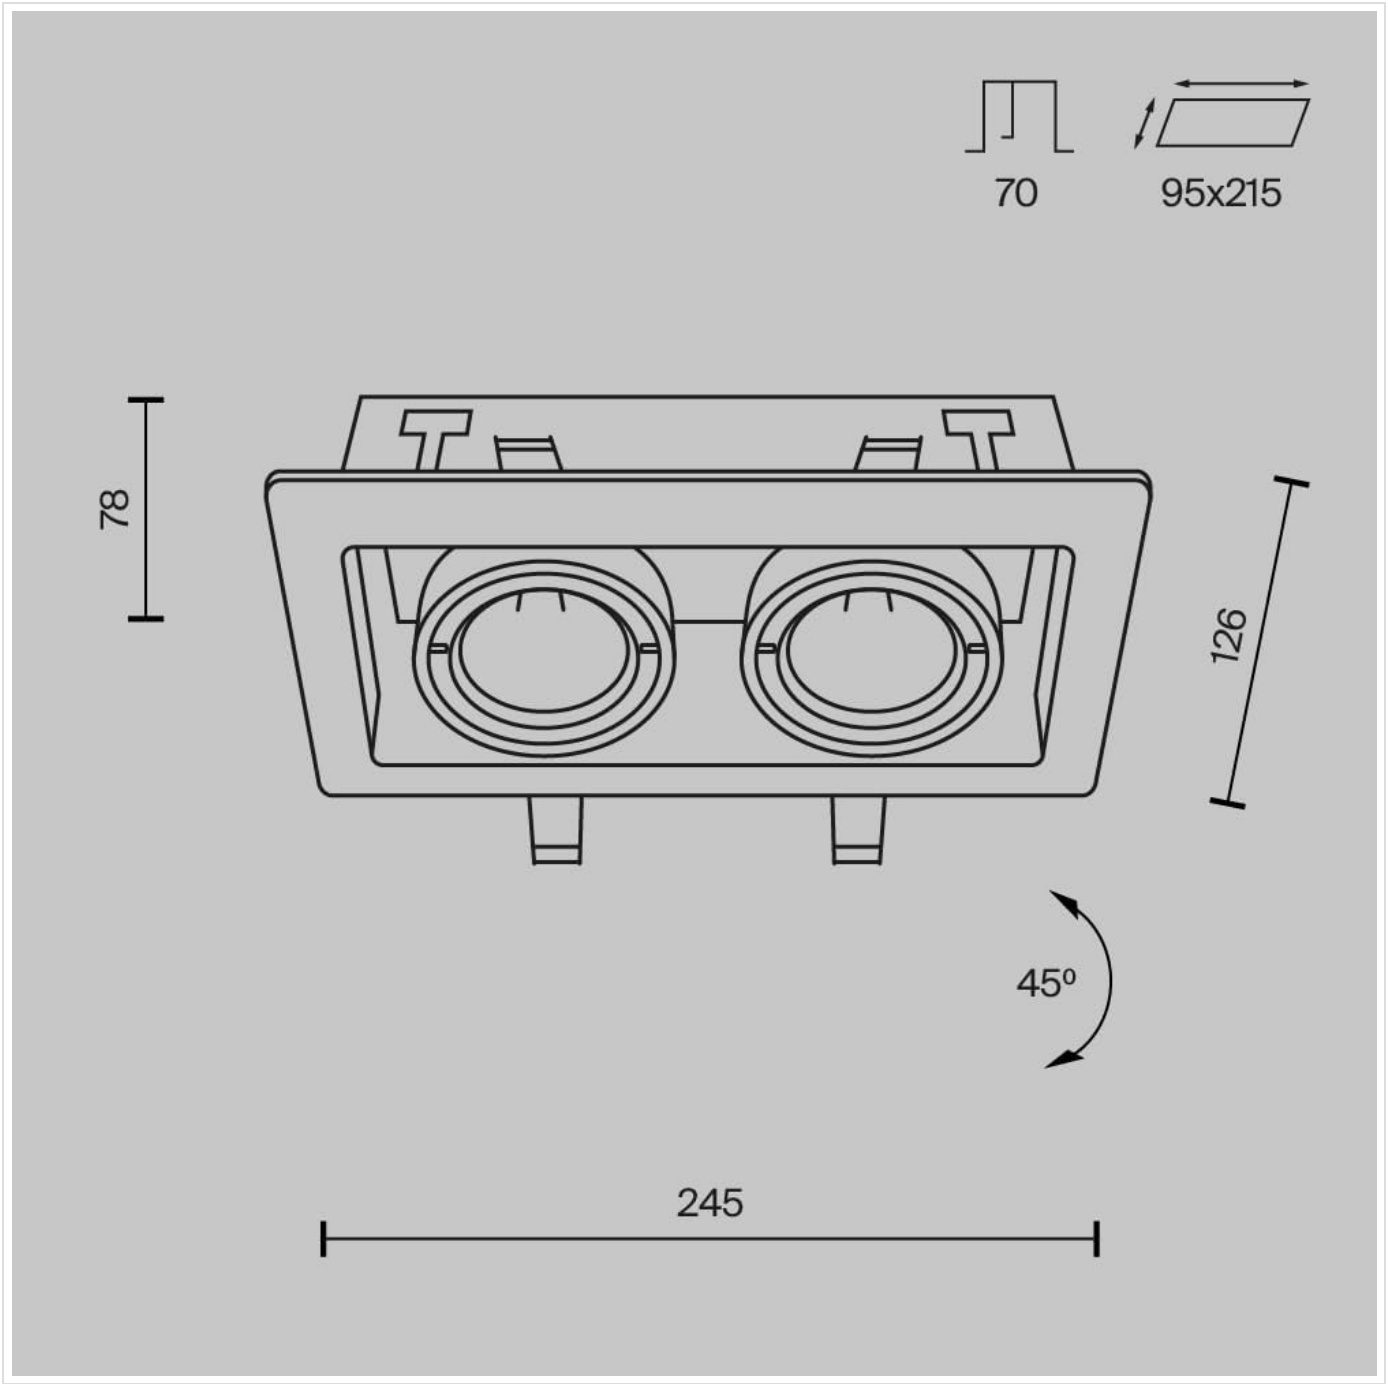


Figure 2: Detailed technical drawing showing the dimensions of the downlight (78mm height, 126mm length, 245mm width) and the recommended cutout size (95x215mm). It also indicates the 45-degree rotation capability of the light sources.

5. **Restore Power:** Once the downlight is securely installed and all connections are checked, restore power at the main circuit breaker.

5. Operating Instructions

The Maytoni DL008-2-02-B downlight is designed for simple operation.

- **Turning On/Off:** Operate the downlight using a standard wall switch connected to the circuit.
- **Adjusting Light Direction:** The individual GU10 lamp holders can be rotated up to 45 degrees. Gently push and rotate the inner ring of each light source to direct the light as desired.



Figure 3: Close-up of an adjustable GU10 lamp holder, demonstrating how the inner ring can be rotated to change the light direction.

6. Maintenance

Regular maintenance ensures optimal performance and longevity of your downlight.

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or liquids that could damage the finish or electrical components.
- **Bulb Replacement:** Disconnect power before replacing bulbs. Allow bulbs to cool completely. Gently twist the old GU10 bulb counter-clockwise to remove it. Insert a new GU10 bulb (max 50W) by aligning the pins and twisting clockwise until secure.



Figure 4: Illustration of a GU10 bulb being inserted into the lamp holder, demonstrating the twist-and-lock mechanism.

7. Troubleshooting

If you encounter issues with your downlight, refer to the following common problems and solutions:

- **Light Does Not Turn On:**
  - Check if the power supply is connected and the circuit breaker is on.
  - Ensure the GU10 bulbs are correctly inserted and not faulty. Replace bulbs if necessary.
  - Verify all electrical connections are secure. (Consult a qualified electrician if unsure).
- **Flickering Light:**
  - Ensure bulbs are fully seated in their sockets.
  - Check for loose wiring connections.
  - If using dimmable bulbs, ensure they are compatible with your dimmer switch.
- **Overheating:**
  - Ensure the correct wattage GU10 bulbs (max 50W) are used.

- Verify that the fixture is not covered by insulation or other materials that could impede heat dissipation.

If problems persist after following these steps, contact customer support or a qualified electrician.

8. Warranty and Support

This Maytoni product comes with a**2-year warranty** from the date of purchase, covering manufacturing defects. This warranty does not cover damage caused by improper installation, misuse, accidents, or normal wear and tear.

For warranty claims, technical assistance, or further inquiries, please contact your retailer or Maytoni customer support with your proof of purchase and model number (DL008-2-02-B).

Manufacturer: Maytoni

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07QNJCQ3C

More documents and user manuals: **https://manuals.plus/**