

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [artika](#) /

› [Artika Subway Bathroom Vanity Light \(Model TRK4SUB-N-ON\) Instruction Manual](#)

artika TRK4SUB-N-ON

Artika Subway Bathroom Vanity Light (Model TRK4SUB-N-ON) Instruction Manual

Brand: Artika

1. INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Artika Subway Bathroom Vanity Light, Model TRK4SUB-N-ON. Please read all instructions carefully before beginning installation and retain this manual for future reference.

The Artika Subway Vanity Light features a modern design with premium bubble glass and a brushed nickel finish, providing optimal luminosity for your bathroom. It is designed for wall installation and is dimmable with most LED dimmers.



Figure 1: Front view of the Artika Subway Bathroom Vanity Light.

2. PRODUCT FEATURES

- Premium bubble glass
- Brushed nickel finish
- Dimmable (Compatible with most LED Dimmers)
- 2-way installation (Up or Down) - Wall installation only
- Hardware included
- Integrated LED light source

3. SAFETY INFORMATION

Always turn off the electrical power at the main circuit breaker or fuse box before beginning installation. Ensure all electrical connections are made in accordance with local codes, ordinances, and the National Electric Code (NEC). If you are unfamiliar with electrical wiring, consult a qualified electrician.

This fixture is designed for indoor use only. Do not install in wet locations. Ensure the mounting surface can support the weight of the fixture.

4. SETUP AND INSTALLATION

4.1. Package Contents

- Artika Subway Bathroom Vanity Light Fixture
- Mounting Hardware (screws, wire nuts, mounting plate)
- Instruction Manual

4.2. Tools Required (Not Included)

- Screwdriver
- Wire Strippers
- Pliers
- Electrical Tape
- Safety Glasses

4.3. Mounting the Fixture

1. Turn off power at the circuit breaker.
2. Remove the old fixture (if applicable) and disconnect wiring.
3. Attach the mounting plate to the junction box using the provided screws.
4. Connect the fixture wires to the house wires: black to black (live), white to white (neutral), and bare copper/green to bare copper/green (ground). Secure connections with wire nuts.
5. Carefully tuck all wires into the junction box.
6. Align the fixture with the mounting plate and secure it with the provided screws. The fixture can be installed for upward or downward light direction.

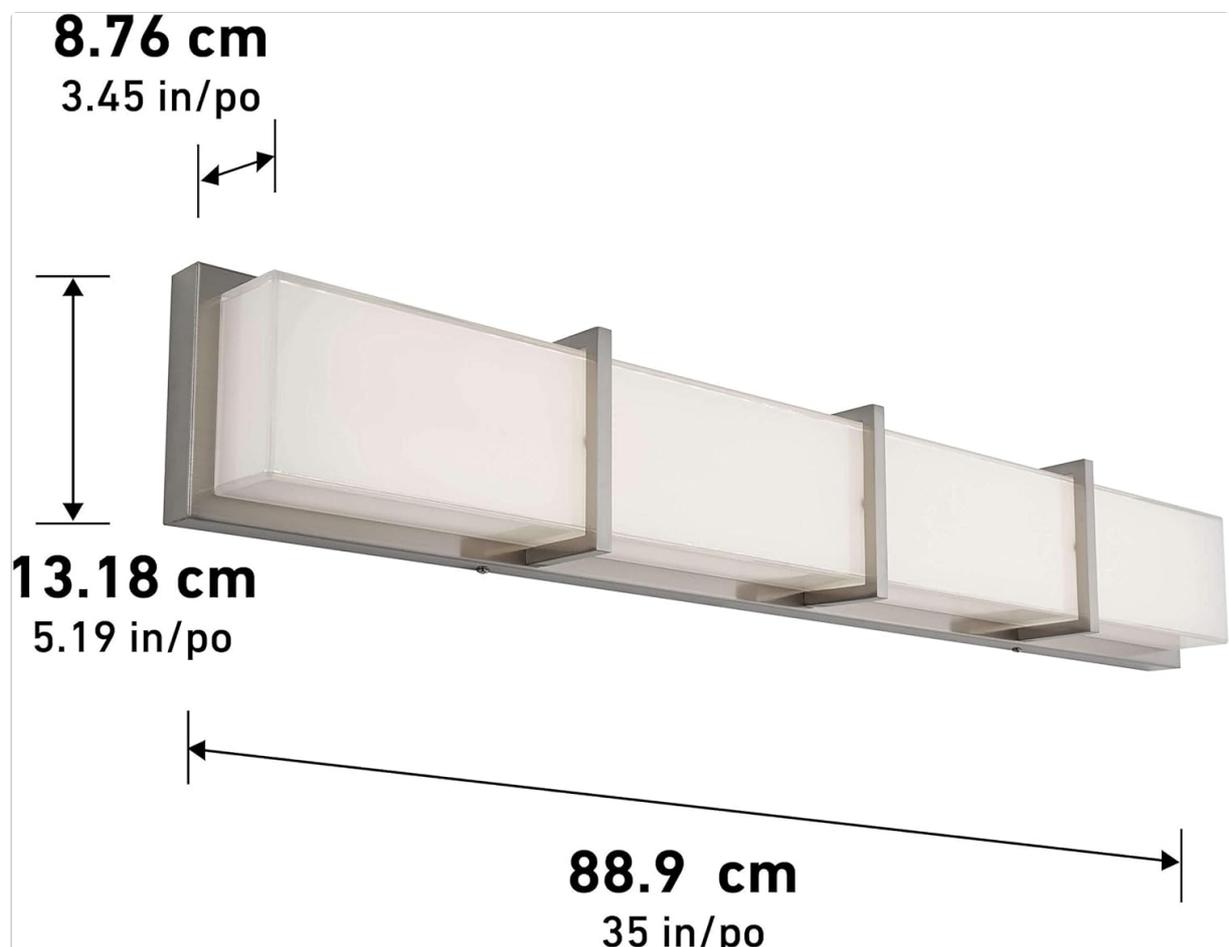


Figure 2: Dimensions of the Artika Subway Bathroom Vanity Light, showing length, width, and height.

5. OPERATING INSTRUCTIONS

5.1. Turning On/Off

Once installed, the light fixture can be turned on or off using your standard wall switch.

5.2. Dimmable Functionality

This Artika Subway Vanity Light is designed to be dimmable. For optimal performance, ensure you use an LED-compatible dimmer switch. Using a non-LED compatible dimmer may result in flickering or improper dimming functionality.

Your browser does not support the video tag.

Video: Official Artika video showcasing the product development and design philosophy behind their lighting fixtures, including the Subway Vanity Light.

6. MAINTENANCE

To maintain the appearance and functionality of your light fixture, follow these guidelines:

- **Cleaning:** Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.
- **LED Care:** This fixture uses integrated LED components, which are designed for long-lasting performance. There are no bulbs to replace.
- **Inspection:** Periodically check all electrical connections and mounting hardware for tightness.

7. TROUBLESHOOTING

If you experience issues with your Artika Subway Bathroom Vanity Light, refer to the following common troubleshooting steps:

- **Light does not turn on:**
 - Ensure the power is on at the circuit breaker.
 - Check all wire connections to ensure they are secure.
 - Verify the wall switch is in the 'ON' position.
- **Light flickers or dims improperly:**
 - Confirm that an LED-compatible dimmer switch is being used.
 - Check for loose wire connections.
 - Ensure the dimmer switch is properly installed and rated for LED lighting.
- **Unusual noise:**
 - Turn off power and re-check all connections. If the noise persists, consult a qualified electrician.

If these steps do not resolve the issue, please contact Artika customer support.

8. SPECIFICATIONS

Specification	Detail
Brand	artika

Model Number	TRK4SUB-N-ON
Material	Alloy Steel, Glass
Color	Brushed Nickel (fixture), Clear (shade)
Style	Modern
Light Fixture Form	Vanity
Room Type	Bathroom
Power Source	Hardwired
Light Source	LED
Number of Light Sources	1 (integrated LED strip)
Voltage	120 Volts
Wattage	27 watts
Brightness	1750 lumen
Item Dimensions (L x W x H)	35"L x 3"W x 5"H
Item Weight	8 Pounds
Dimmable	Yes (compatible with most LED dimmers)

9. WARRANTY AND SUPPORT

9.1. Manufacturer's Warranty

This Artika Subway Bathroom Vanity Light comes with a 3-year limited warranty from the manufacturer, Artika for Living Inc. Please refer to the warranty documentation included with your product for full terms and conditions.

9.2. Customer Support

For technical assistance, replacement parts, or warranty claims, please contact Artika for Living Inc. customer support. You can find more information and contact details on their official website or through their Amazon store page: [Artika Amazon Store](#).