

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Emliviar](#) /

› [Emliviar Farmhouse Barn Lights \(Model 523-2\) Instruction Manual](#)

## Emliviar 523-2

# Emliviar Farmhouse Barn Lights (Model 523-2) Instruction Manual

Model: 523-2 AG

## INTRODUCTION

---

Welcome and thank you for choosing Emliviar Farmhouse Barn Lights. This manual provides essential information for the safe and proper installation, operation, and maintenance of your new wall sconces. Please read these instructions thoroughly before beginning installation and retain them for future reference.

These classic wall light fixtures feature a gold finish on metal construction with a gooseneck arm, designed for durability and style. They are hard-wired and require one E26 base bulb (Max. 60W) per light. This product is ETL Listed, ensuring it meets safety standards.

## SAFETY INFORMATION

---

For your safety, always follow these precautions:

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker or fuse box before installation, servicing, or changing bulbs.
- Consult a qualified electrician if you are unsure about the installation process.
- Do not exceed the maximum wattage specified for the bulb (60W).
- Use only bulbs with an E26 base.
- Handle glass components with care to prevent breakage.
- Ensure all connections are secure and properly insulated.
- This fixture is designed for hard-wired installation. Do not modify the wiring.

## PACKAGE CONTENTS

---

Verify that all components are present before beginning installation:

- Wall Sconce Fixture (2 units)
- Mounting Hardware Kit (screws, wire nuts, mounting plate)
- Instruction Manual



Image: Emliviar Farmhouse Barn Light, showing the gold finish and gooseneck design.

## INSTALLATION INSTRUCTIONS

---

### Tools Required (Not Included):

- Phillips Head Screwdriver
- Flathead Screwdriver
- Wire Strippers
- Electrical Tape
- Pliers

### Step-by-Step Installation:

1. **Turn Off Power:** Locate the circuit breaker or fuse box and turn off the power to the junction box where you will be installing the fixture.
2. **Prepare Mounting Plate:** Attach the mounting plate to the junction box using the provided screws. Ensure it is securely fastened.
3. **Make Electrical Connections:**

- Connect the **green or bare copper ground wire** from the fixture to the **ground wire** from the junction box (usually bare copper or green). Secure with a wire nut.
  - Connect the **white (neutral) wire** from the fixture to the **white (neutral) wire** from the junction box. Secure with a wire nut.
  - Connect the **black (live) wire** from the fixture to the **black (live) wire** from the junction box. Secure with a wire nut.
  - Wrap all wire connections with electrical tape for added security.
4. **Mount the Fixture:** Carefully tuck all wires into the junction box. Align the fixture's canopy with the mounting plate and secure it with the provided screws.
  5. **Install Bulb:** Screw an E26 base bulb (Max. 60W, not included) into the socket.
  6. **Restore Power:** Turn the power back on at the circuit breaker or fuse box. Test the light fixture.



Image: Example of the Emliviar Barn Light installed.

## OPERATION

Once installed and powered, your Emliviar Farmhouse Barn Light operates via a standard wall switch connected to the circuit. Simply toggle the switch to turn the light on or off.

## Bulb Requirements:

- Base Type: E26
- Maximum Wattage: 60W
- Compatible Bulb Types: Incandescent, LED, or CFL

## MAINTENANCE

---

### Cleaning:

- Always ensure the power is off and the fixture is cool before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use harsh chemicals, abrasive cleaners, or polishes as they may damage the finish.

### Bulb Replacement:

- Turn off the power to the fixture at the circuit breaker.
- Allow the bulb to cool completely before touching it.
- Carefully unscrew the old bulb from the socket.
- Screw in a new E26 base bulb, ensuring it does not exceed 60W.
- Restore power and test the new bulb.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Light does not turn on	<ol style="list-style-type: none"><li>1. Power is off</li><li>2. Loose wiring connection</li><li>3. Faulty bulb</li><li>4. Faulty wall switch</li></ol>	<ol style="list-style-type: none"><li>1. Check circuit breaker/fuse</li><li>2. Verify all wire connections are secure (with power off)</li><li>3. Replace bulb</li><li>4. Test or replace switch</li></ol>
Light flickers	<ol style="list-style-type: none"><li>1. Loose bulb</li><li>2. Loose wiring connection</li><li>3. Incompatible dimmer switch (if applicable)</li></ol>	<ol style="list-style-type: none"><li>1. Tighten bulb</li><li>2. Check wiring connections (with power off)</li><li>3. Ensure dimmer is compatible with bulb type</li></ol>
Bulb burns out quickly	<ol style="list-style-type: none"><li>1. Incorrect bulb wattage</li><li>2. Voltage fluctuations</li></ol>	<ol style="list-style-type: none"><li>1. Use bulb within specified wattage (Max 60W)</li><li>2. Consult an electrician to check household voltage</li></ol>

## SPECIFICATIONS

---

Feature	Detail
Brand	Emliviar
Model Number	523-2

Feature	Detail
Color	Gold
Material	Metal
Product Dimensions	16"L x 9.8"W x 9.8"H
Shade Diameter	9.8"
Back Plate Diameter	4.72"
Power Source	AC (Hard-wired)
Voltage	120 Volts
Light Source Type	Incandescent, LED, CFL
Bulb Base	E26
Max Wattage per Light	60 Watts
Mounting Type	Wall Mount
Assembly Required	Yes
Certifications	ETL Listed

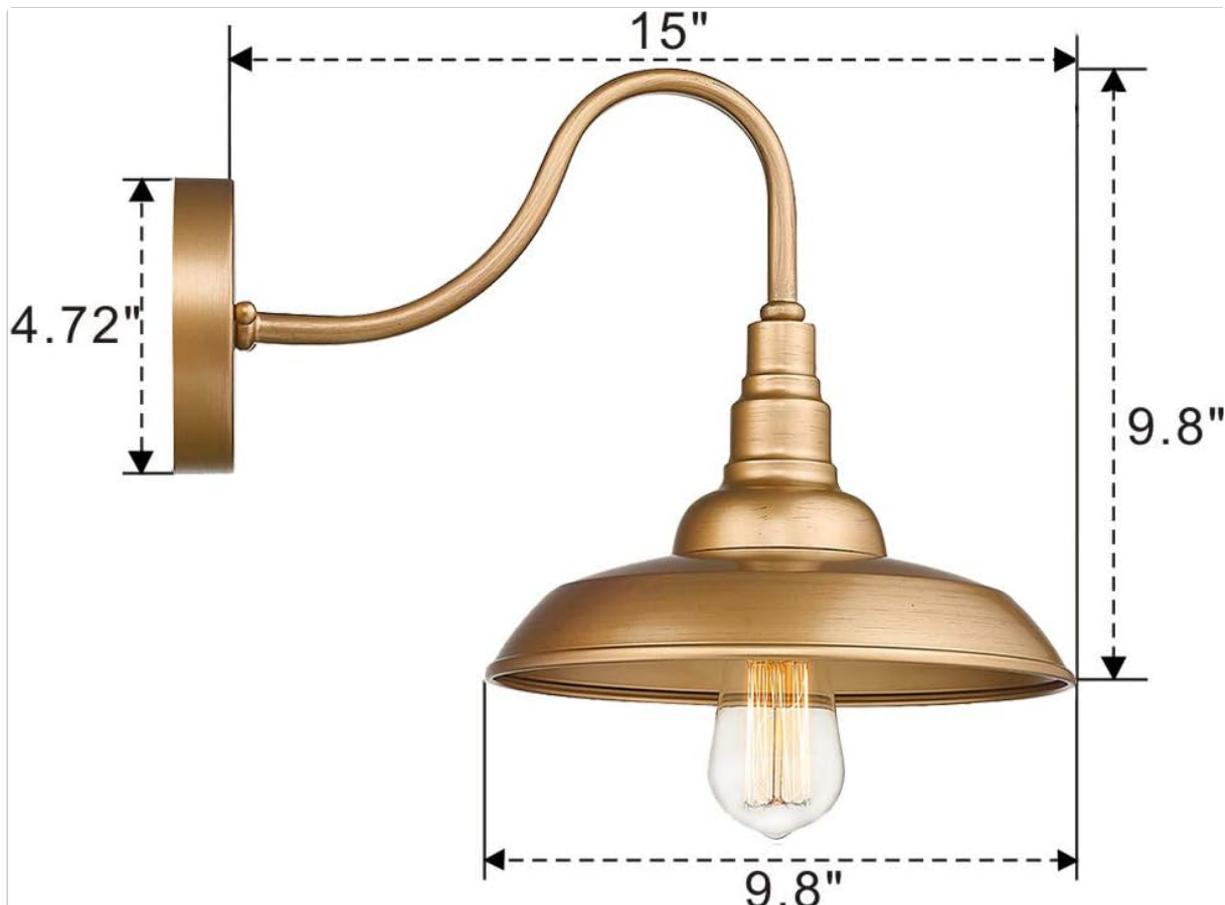


Image: Product dimensions diagram.

## **WARRANTY INFORMATION**

---

This Emliviar product is ETL Listed and comes with a one-year warranty from the date of purchase. This warranty covers defects in materials and workmanship under normal use. It does not cover damage resulting from improper installation, accident, misuse, abuse, or unauthorized modifications.

## **CUSTOMER SUPPORT**

---

If you have any questions regarding the installation, operation, or maintenance of your Emliviar Farmhouse Barn Lights, please refer to the troubleshooting section first. If issues persist or you require further assistance, please contact Emliviar customer support through the retailer where the product was purchased.