

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [KMC](#) /

› [KMC Smart Tap 4-Outlet Wi-Fi Smart Plug Instruction Manual](#)

## KMC KMC Smart Tap

# KMC Smart Tap 4-Outlet Wi-Fi Smart Plug Instruction Manual

Model: KMC Smart Tap

## INTRODUCTION

This manual provides instructions for the safe and efficient use of your KMC Smart Tap 4-Outlet Wi-Fi Smart Plug. Please read this guide thoroughly before operation and retain it for future reference.

## PRODUCT OVERVIEW

### Key Features

- **4-Outlet Design:** One "always on" outlet and three individually controllable outlets.
- **Wi-Fi Connectivity:** Requires a 2.4GHz Wi-Fi network.
- **Remote Control:** Manage devices via the KMC Smart app.
- **Voice Control:** Compatible with Amazon Alexa and Google Home.
- **Scheduling & Timers:** Automate power on/off for connected devices.
- **Energy Monitoring:** Track real-time and historical power consumption.
- **Safety:** ETL Certified, built-in thermal sensor.

### Package Contents

- KMC Smart Tap 4-Outlet Wi-Fi Smart Plug
- Instruction Manual

### Product Diagram



Front view of the KMC Smart Tap, showing the four outlets, the main power button, and Wi-Fi indicator.



Diagram illustrating the dimensions of the KMC Smart Tap (3.7 inches width, 4.3 inches height, 0.9 inches depth).

**SETUP GUIDE**

**Installation**

Plug the KMC Smart Tap into a standard 110V wall outlet. Ensure it is securely seated.

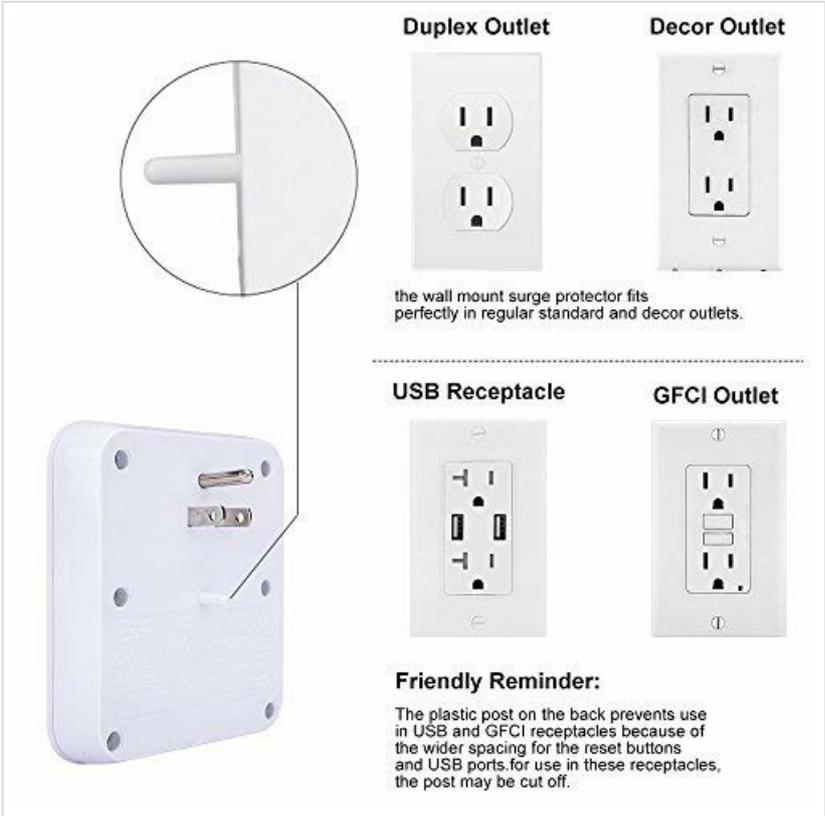


Image showing the KMC Smart Tap plugged into a duplex outlet, with a note about its compatibility and a reminder that the plastic post on the back prevents use in USB and GFCI receptacles due to wider spacing.

**App Download and Account Creation**

Download the "KMC Smart" or "Smart Life" app from your smartphone's app store (iOS or Android).

Register for a new account or log in if you already have one.

## Device Pairing

- Ensure your smartphone is connected to a 2.4GHz Wi-Fi network. The KMC Smart Tap requires a 2.4GHz network for initial setup and operation.
- Open the app and follow the on-screen instructions to add a new device.
- The device's Wi-Fi indicator light will blink during pairing.
- Once successfully paired, the indicator light will become solid.

## OPERATION

### Manual Control


The main power button on the front of the KMC Smart Tap can be pressed to manually toggle power for all three individually controlled outlets simultaneously. The "Always On" outlet remains powered.

### Remote Control via App

Open the KMC Smart app on your smartphone.

Select the KMC Smart Tap device.

You can individually control the three switchable outlets (labeled 1, 2, 3) and monitor the "Always On" outlet status from anywhere with an internet connection.

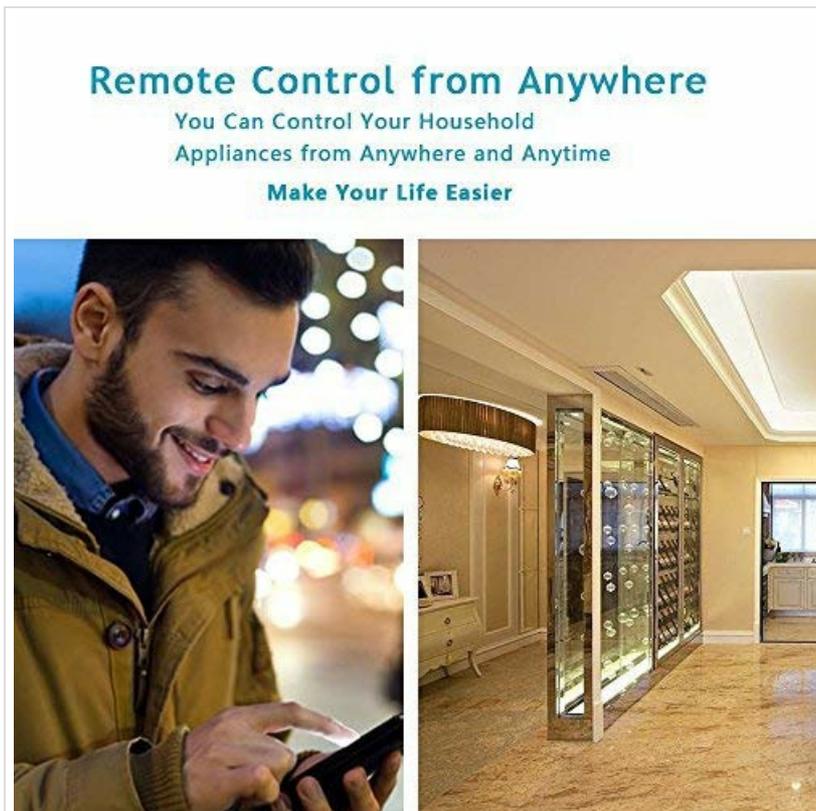

A person using a smartphone to remotely control household appliances, demonstrating the remote control feature of the smart plug.

### Voice Control

The KMC Smart Tap is compatible with Amazon Alexa and Google Home.

To enable voice control, link your KMC Smart account within the Alexa or Google Home app.

For Amazon Alexa, you can name each individual outlet (1, 2, 3) to control them independently using voice

commands (e.g., "Alexa, turn on Outlet 1").

For Google Home, overall control of the device is supported.

## Product use warning !



**Amazon Alexa support independent control function, you should name of each jack In order to achieve independent control.**

**Google Home support overall control, but not support independent control function.**



Image showing the KMC Smart Tap alongside Amazon Alexa and Google Home devices, indicating compatibility and control methods.

## Scheduling and Timers

Within the KMC Smart app, navigate to the device settings to set schedules and timers for your connected appliances.

You can program specific times for outlets to turn on or off automatically, enhancing convenience and energy efficiency.



### BETTER TAKE CARE YOUR CHILD

you can through the KMC Smart Plug setting Child's schedule, make sure your kids are well-rested.



An image depicting a child sleeping peacefully, illustrating how scheduling features can be used to manage device operation for routines, such as ensuring a restful environment.

## Energy Monitoring

The KMC Smart app provides real-time and historical energy consumption data for devices connected to the Smart Tap.

Access the "Electricity Statistics" section in the app to view current usage (Current, Power, Voltage) and historical data (daily, monthly, yearly kWh).



A smartphone screen displaying "Energy Usage History" with current electrical quantity (0.26 kWh) and monthly breakdowns for previous years, next to a lamp.

## MAINTENANCE

### Cleaning

- Disconnect the smart plug from the power outlet before cleaning.
- Use a dry, soft cloth to wipe the surface. Do not use liquid or aerosol cleaners.

### Safety Precautions

- Do not disassemble or modify the device.
- Avoid exposing the device to water or humid environments.
- Do not exceed the maximum load of 15A, 1875W.
- The built-in thermal sensor will automatically turn off overheating appliances.

## TROUBLESHOOTING

### Device Not Connecting to Wi-Fi

- Ensure your Wi-Fi network is 2.4GHz. 5GHz networks are not supported.
- Check that your Wi-Fi password is correct.

- Move the smart plug closer to your Wi-Fi router.
- Reset the smart plug by holding the power button for 5-10 seconds until the Wi-Fi indicator blinks rapidly, then attempt pairing again.

### Remote Control Not Working

- Verify your smartphone has an active internet connection.
- Ensure the smart plug is connected to your home Wi-Fi network (solid Wi-Fi indicator light).
- Check for app updates.

### Voice Control Issues

- Confirm that your KMC Smart account is correctly linked in the Alexa or Google Home app.
- Ensure the device names in the smart home app match your voice commands.
- Check the internet connection of your voice assistant device.

### SPECIFICATIONS

Feature	Value
Number Of Poles	2
No. of wires	2
Plug Format	Type A
Specification Met	ETL
Amperage	15 Amps
UPC	743267670332
Manufacturer	KT-KMC
Package Dimensions	8.58 x 4.84 x 2.24 inches
Item Weight	14.9 ounces
ASIN	B07SWZ2N4J
Date First Available	June 10, 2019
Brand	KMC
Color	White
Voltage	110 Volts
Material	Acrylonitrile Butadiene Styrene (ABS)
Connector Type	Plug in

### WARRANTY AND SUPPORT

#### Warranty Information

The KMC Smart Tap includes a 30-day money-back guarantee and lifetime support.

## **Customer Support**

For technical assistance or warranty claims, please refer to the contact information provided on the KMC official website or within the KMC Smart app.