

Progress Lighting P400193-031

Progress Lighting P400193-031 Five-Light Drum Chandelier Instruction Manual

Model: P400193-031

1. INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Progress Lighting P400193-031 Five-Light Drum Chandelier. Please read all instructions carefully before beginning installation and retain this manual for future reference.



Image 1.1: The Progress Lighting P400193-031 Five-Light Drum Chandelier with Harvest Linen Shade.


2. SAFETY INFORMATION

WARNING: Risk of Electric Shock.

- Always turn off the main power supply at the circuit breaker before installing, servicing, or cleaning this fixture.
- Consult a qualified electrician if you are unsure about the installation process.
- Ensure all electrical connections comply with local codes and ordinances, as well as the National Electrical Code (NEC).
- Do not connect this fixture to an ungrounded electrical system.
- Handle glass components and bulbs with care to prevent breakage.
- This fixture is intended for indoor use only.

3. PACKAGE CONTENTS

Verify that all components listed below are present and undamaged before beginning installation.

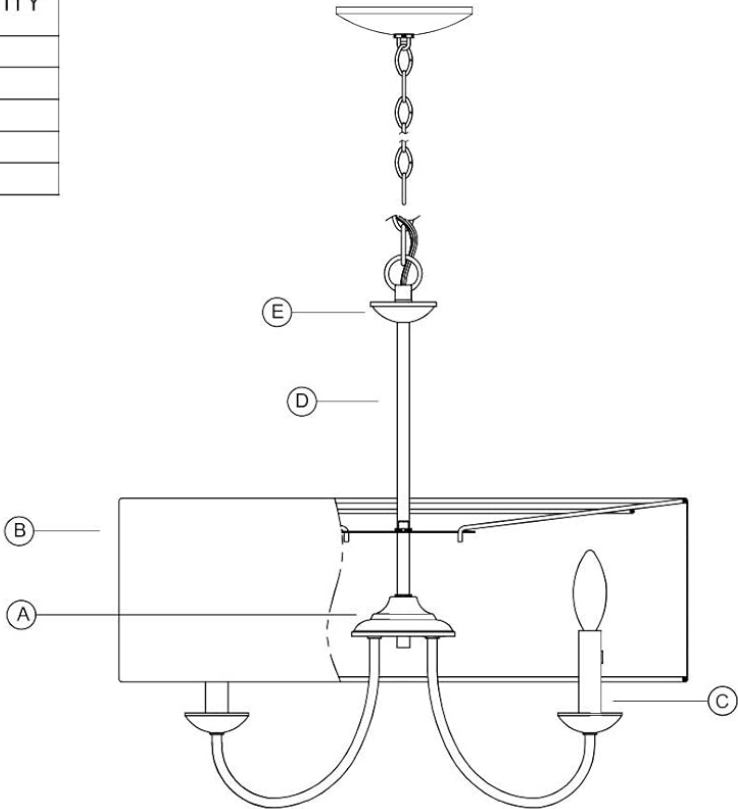


P400193-031 P4217-09 P4217-20










5-LT CHANDELIER WITH
DRUM SHADE


PACKAGE CONTENTS

PART	DESCRIPTION	QUANTITY
A	Fixture	1
B	Shade	1
C	Candle Cover	5
D	Pipe	1
E	Body	1



HARDWARE CONTENTS (not actual size)

AA	BB	CC	DD	EE	FF	GG	HH	JJ
								
Hex nut (1/8IP) Qty:2	Wire connector Qty:3	1/8IP Mounting strap Qty:1	Screw collar Qty:1	Chain holder (1/8IP) Qty:1	Nipple (1/8IP) Qty:1	Chain (42") Qty:1	Canopy Qty:1	Chain loop (1/8IP) Qty:1



Missing parts? Please contact Customer Service at 1-800-447-0573,
8am-8pm (Eastern), Monday - Friday, or at customerservice@progresslighting.com

93047497 Page:1

Image 3.1: Diagram showing the included parts and their quantities.

Table 3.1: Included Components

Part	Description	Quantity
A	Fixture	1

Part	Description	Quantity
B	Shade	1
C	Candle Cover	5
D	Pipe	1
E	Body	1

Hardware Contents (not actual size)

- Hex nut (1/8IP): Qty: 2
- Wire connector: Qty: 3
- 1/8IP Mounting strap: Qty: 1
- Screw collar: Qty: 1
- Chain holder (1/8IP): Qty: 1
- Nipple (1/8IP): Qty: 1
- Chain (42"): Qty: 1
- Canopy: Qty: 1
- Chain loop (1/8IP): Qty: 1

4. SPECIFICATIONS

Table 4.1: Product Specifications

Feature	Detail
Model Number	P400193-031
Brand	Progress Lighting
Dimensions (Fixture)	21-5/8 in diameter X 21-1/8 in height (21.63"L x 21.13"W x 21.63"H)
Overall Height (with chain)	65-1/2 in
Overall Height (with wire)	120 in
Material	Alloy Steel, Linen Shade
Finish	Matte Black
Shade Color	Harvest Linen
Number of Lights	5
Bulb Base	E12 (Candelabra Base)
Max Wattage per Bulb	60 watts
Voltage	120 Volts

Feature	Detail
Dimmable	Yes (with compatible dimmer and bulbs)
Installation Type	Ceiling Mount, Freestanding
Included Chain Length	42 inches
Item Weight	10 Pounds
UPC	785247233021

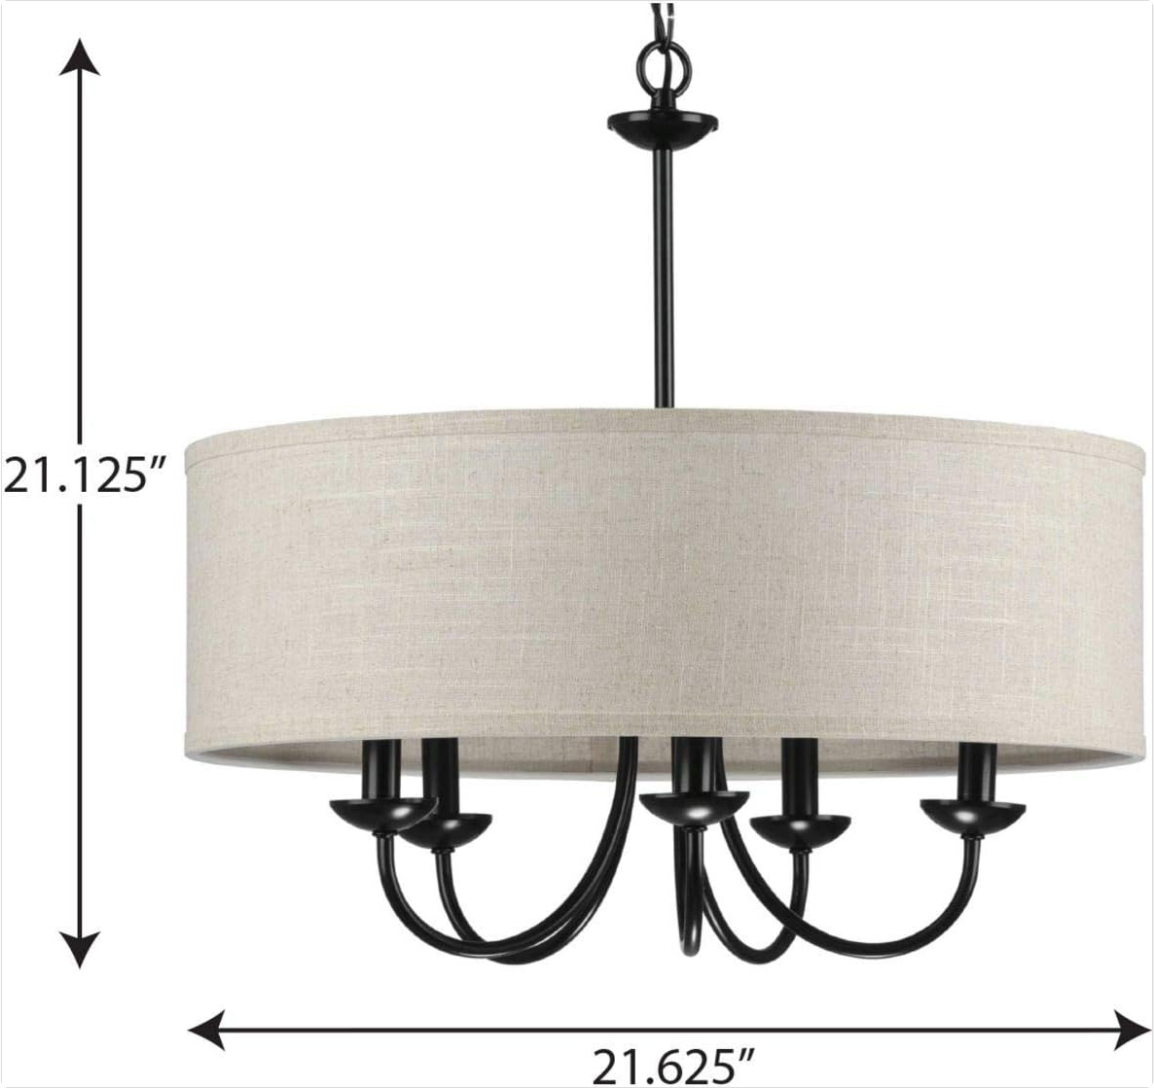


Image 4.1: Detailed dimensions of the chandelier fixture.

5. SETUP AND INSTALLATION

Before installation, ensure the power is turned off at the circuit breaker. It is recommended to have two people for installation.

Tools Required (Not Included):

- Phillips head screwdriver
- Flathead screwdriver

- Wire strippers
- Pliers
- Electrical tape
- Safety glasses

Installation Steps:

1. **Prepare the Mounting Strap:** Attach the mounting strap to the outlet box using the provided screws. Ensure it is securely fastened.
2. **Adjust Chain Length:** Determine the desired hanging height. The fixture includes 42 inches of chain. Use pliers to open and remove excess chain links if necessary. Thread the electrical wire through the chain links.
3. **Connect Wiring:** Carefully connect the fixture's electrical wires to the house wiring. Match black to black (live), white to white (neutral), and bare copper or green to bare copper or green (ground). Secure connections with wire connectors and electrical tape.
4. **Secure Canopy:** Raise the canopy to the ceiling, covering the outlet box. Secure it to the mounting strap using the screw collar.
5. **Assemble Fixture Body:** Attach the pipe (D) to the fixture body (E).
6. **Install Shade and Candle Covers:** Place the drum shade (B) onto the fixture. Install the five candle covers (C) over the bulb sockets.
7. **Install Bulbs:** Screw in five E12 candelabra base bulbs (not included) into the sockets. Do not exceed 60 watts per bulb.

400193

WARNING - If any Special Control Devices are used with this Fixture, Follow the Instructions Carefully to assure full compliance with N.E.C. requirements. If there are any questions, contact a Qualified Electrical Contractor.
CAUTION - All glass is fragile, use care when handling Glass component(s) and or Lamp(s).

CANOPY MOUNTING & WIRE CONNECTION ASSEMBLY STEPS:

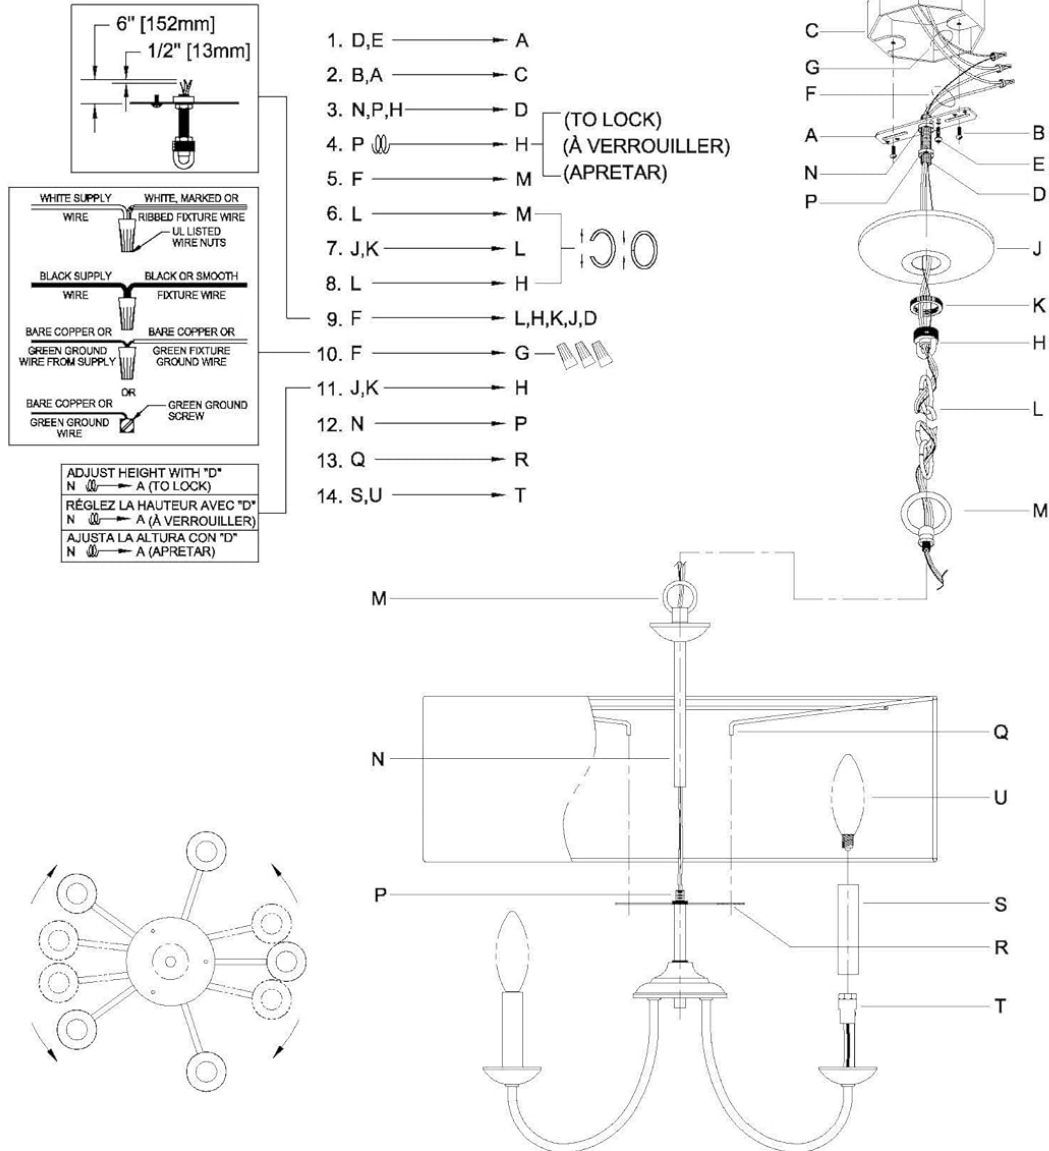



Image 5.1: Detailed assembly and wiring diagram for the chandelier.

Instructions d'Assemblage et Installation

MISE EN GARDE: Lire les instructions avec soin et couper le courant au disjoncteur central avant de commencer l'installation.

AVERTISSEMENT - S'il y a d'autres mécanismes régulateurs qui s'emploient avec ce dispositif, suivre soigneusement les instructions pour satisfaire aux exigences NEC. Si vous avez des questions, consulter un électricien qualifié.

MISE EN GARDE - Le verre est toujours fragile; maniez le(s) composant(s) et/ou l' (les) ampoule(s) avec prudence.



Instrucciones de ensamblaje e instalación

PRECAUCIÓN: Lea cuidadosamente las instrucciones y desconecte la electricidad del cortacircuitos principal antes de iniciar la instalación.

ADVERTENCIA - Si usa algún dispositivo especial de control con este aparato de luz, siga las instrucciones cuidadosamente para asegurar la completa conformidad con los requisitos N.E.C. Si existe alguna duda, contacte un electricista calificado.

PRECAUCION - El vidrio es frágil; tenga cuidado al manipular el (los) elemento(s) de vidrio y/o la(s) bombilla(s).



Image 5.2: Important safety warnings and multilingual instructions for installation.

DRUM SHADE COLLECTION



P400193-031
Matte Black
21.625" W. x 21.125" H.



P4217-09
Brushed Nickel
21.625" W. x 21.125" H.



P4217-20
Antique Bronze
21.625" W. x 21.125" H.



P4217-109
Brushed Bronze
21.625" W. x 21.125" H.



Image 5.3: Illustration of the included 42-inch chain for height adjustment.

6. OPERATING INSTRUCTIONS

Once installed, restore power at the circuit breaker. The chandelier is operated via your wall switch.

Bulb Requirements:

- This fixture requires five (5) E12 (candelabra base) bulbs.
- Maximum wattage per bulb is 60 watts.
- LED equivalent bulbs can be used for energy efficiency.

Dimmable Feature:

This chandelier is dimmable when paired with a compatible wall dimmer switch and dimmable E12 bulbs. Ensure both the dimmer and bulbs are rated for dimming functionality.

DRUM SHADE COLLECTION



P400193-031
Matte Black
21.625" W. x 21.125" H.



P4217-09
Brushed Nickel
21.625" W. x 21.125" H.



P4217-20
Antique Bronze
21.625" W. x 21.125" H.



Image 6.1: Information regarding bulb type and dimming compatibility.

7. MAINTENANCE

Cleaning:

- Always turn off power to the fixture and allow it to cool before cleaning.
- Wipe the metal parts with a soft, dry cloth.
- For the linen shade, use a soft brush or a vacuum cleaner with a brush attachment to gently remove dust. Do not use liquid cleaners on the shade.
- Avoid using abrasive cleaners or solvents, as they may damage the finish.

Bulb Replacement:

- Ensure power is off at the circuit breaker.
- Allow old bulbs to cool completely before touching.
- Carefully unscrew the old bulb and screw in a new E12 candelabra base bulb.
- Do not exceed the maximum wattage of 60 watts per bulb.

8. TROUBLESHOOTING

If your chandelier is not functioning correctly, refer to the following common issues and solutions:

Table 8.1: Troubleshooting Guide

Problem	Possible Cause	Solution
Light does not turn on	1. Power is off 2. Loose wiring connection 3. Faulty bulb	1. Check circuit breaker and wall switch 2. Turn off power, check wiring connections 3. Replace bulb(s)
Light flickers	1. Loose bulb 2. Incompatible dimmer switch 3. Loose wiring	1. Tighten bulb 2. Ensure dimmer is compatible with bulbs 3. Turn off power, check wiring connections
Dimmable feature not working	1. Non-dimmable bulbs 2. Non-dimmable switch	1. Replace with dimmable bulbs 2. Install a compatible dimmer switch

If the issue persists after attempting these solutions, please contact customer service.

9. WARRANTY AND SUPPORT







Warranty Information:

This Progress Lighting fixture is covered by a **1-Year Limited Manufacturer's Warranty**. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

Customer Support:

For missing parts, technical assistance, or warranty inquiries, please contact Progress Lighting Customer Service:

- **Phone:** 1-800-447-0573
- **Hours:** 8am-8pm (Eastern), Monday - Friday
- **Email:** customerservice@progresslighting.com

 <p>PROGRESS LIGHTING P400209-031 5-LIGHT</p>	<p>Progress Lighting Riley P400209-031 5-Light Black Chandelier - Specifications and Overview</p> <p>Detailed specifications, features, and product overview for the Progress Lighting Riley P400209-031 5-light black chandelier with clear glass shades. Includes dimensions, electrical, mounting, and warranty information.</p>
 <p>PROGRESS LIGHTING P400395 6-LIGHT CHANDELIER</p>	<p>Progress Lighting P400395 6-Light Chandelier Assembly Instructions</p> <p>Comprehensive assembly and installation guide for the Progress Lighting P400395 6-Light Chandelier. Features package contents, hardware details, safety precautions, and step-by-step installation procedures.</p>
 <p>PROGRESS LIGHTING P400047 4-LT CHANDELIER</p>	<p>Progress Lighting P400047 Briarwood 4-LT CHANDELIER Package Contents and Hardware</p> <p>Details the package contents and hardware included with the Progress Lighting P400047 Briarwood 4-Light Chandelier, including part descriptions and quantities. Contact information for missing parts is provided.</p>
 <p>PROGRESS LIGHTING P400370 4-LT CHANDELIER</p>	<p>Progress Lighting P400370 4-LT Chandelier Installation Guide</p> <p>Detailed installation manual for the Progress Lighting P400370 4-Light Chandelier, including package contents, hardware list, safety information, assembly steps, and warranty details.</p>
 <p>PROGRESS LIGHTING P400345/P400349 3-LIGHT CHANDELIER/CONVERTIBLE</p>	<p>Progress Lighting P400345/P400349 3-Light Chandelier Installation Guide</p> <p>Step-by-step installation instructions for the Progress Lighting P400345/P400349 3-Light Chandelier/Convertible fixture. Includes package contents, hardware, safety precautions, care, and assembly steps for ceiling and hanging installations.</p>
 <p>PROGRESS LIGHTING P400311 4-LT CHANDELIER</p>	<p>Progress Lighting P400311 4-LT Chandelier Installation Guide</p> <p>Detailed installation instructions for the Progress Lighting P400311 4-Light Chandelier. This guide covers package contents, hardware, safety, preparation, care, and step-by-step assembly with textual descriptions of diagrams.</p>

