

[Manuals.plus](#) /

> [eMylo](#) /

> eMylo Mini Smart WiFi Switch User Manual

eMylo Mini Smart WiFi Switch

eMylo Mini Smart WiFi Switch User Manual

Model: Mini Smart WiFi Switch

1. INTRODUCTION

Thank you for choosing the eMylo Mini Smart WiFi Switch. This device allows you to remotely control your home appliances using the Smart Life app, voice commands via Alexa or Google Assistant, and set automated schedules. Its compact design ensures easy integration into various electrical setups. Please read this manual carefully before installation and use to ensure proper operation and safety.

2. IMPORTANT SAFETY INFORMATION

- **Electrical Hazard:** Installation should only be performed by a qualified electrician or a person with electrical knowledge.
- Ensure the power supply is completely disconnected before installation or maintenance.
- Do not exceed the maximum load of 10 Amps or 2200W (AC 220V) / 1100W (AC 110V).
- This device is designed for indoor use only. Avoid exposure to moisture or extreme temperatures.
- Only connect to a 2.4GHz Wi-Fi network. 5GHz networks are not supported.
- Keep out of reach of children.

3. PACKAGE CONTENTS

The package typically includes:

- eMylo Mini Smart WiFi Switch (quantity as purchased, e.g., 4 packs)
- User Manual

4. PRODUCT OVERVIEW

The eMylo Mini Smart WiFi Switch is a compact relay module designed to convert traditional appliances into smart devices. Its small form factor allows for discreet installation behind existing wall switches or within junction boxes.

Mini WiFi Switch

Small body, big function

volume :2.7in*1.3in

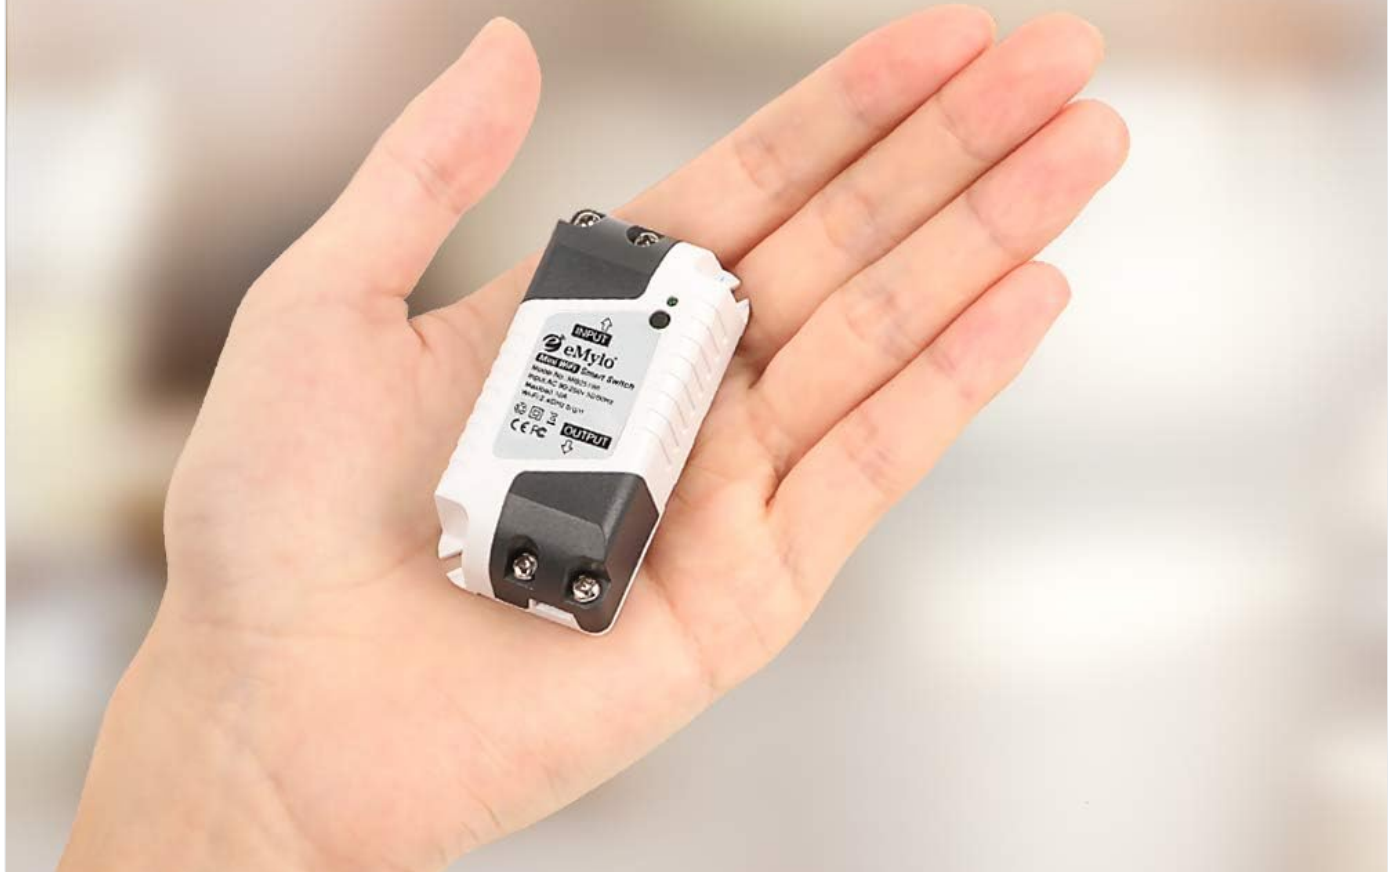


Image 1: The eMylo Mini Smart WiFi Switch, demonstrating its small size when held in a hand. Dimensions are approximately 2.7 inches by 1.3 inches.

5. TECHNICAL SPECIFICATIONS

Parameter	Value
Model	eMylo Mini Wifi switch
Input Voltage	AC 90-250V 50/60 Hz
Max. Load	10 Amp
Max. Power (AC 220V)	2200W
Max. Power (AC 110V)	1100W
Channels	One Channel

Parameter	Value
Wi-Fi Standard	IEEE802.11 b/g/n 2.4G
Ambient Temperature	-30°C to 70°C
Relative Humidity (RH)	<95%
Product Size (L x W x H)	2.7 x 1.3 x 0.87 inches
Material	Acrylonitrile Butadiene Styrene
Control Method	Remote (App, Voice)
Controller Type	Android, iOS

6. SETUP INSTRUCTIONS

6.1 Wiring Diagram

Warning: Ensure power is OFF before wiring. Incorrect wiring can cause damage or electric shock.

1. Connect the Live (L) and Neutral (N) input wires from your power source to the corresponding 'Input' terminals on the smart switch.
2. Connect the Live (L) and Neutral (N) output wires to your appliance (e.g., light fixture, fan) to the corresponding 'Output' terminals on the smart switch.
3. If connecting to an existing wall switch, ensure the wall switch is wired to provide continuous power to the smart switch's input. The smart switch will then control the appliance.

6.2 App Download and Pairing

1. **Download the App:** Search for "Smart Life" in the Apple App Store (iOS) or Google Play Store (Android) and download the application.
2. **Register/Login:** Open the Smart Life app and register for a new account or log in with an existing one.
3. **Add Device:** Power on the eMylo Mini Smart WiFi Switch. The indicator light on the switch should blink rapidly (pairing mode). If not, press and hold the reset button on the switch for 5-10 seconds until it blinks rapidly.
4. In the Smart Life app, tap the "+" icon in the top right corner to add a device.
5. Select "Electrical" > "Switch (Wi-Fi)" or allow the app to auto-discover the device.
6. Confirm the indicator light is blinking rapidly. Enter your 2.4GHz Wi-Fi network name and password.
7. The app will begin connecting to the device. Once connected, you can rename the switch for easier control.

7. OPERATING INSTRUCTIONS

7.1 App Remote Control

Once paired, you can control your connected appliance from anywhere using the Smart Life app on your iOS or Android device, provided your phone has an internet connection.

APP Remote Control

Download the Smart Life app and you can easily control your smart home device remotely.

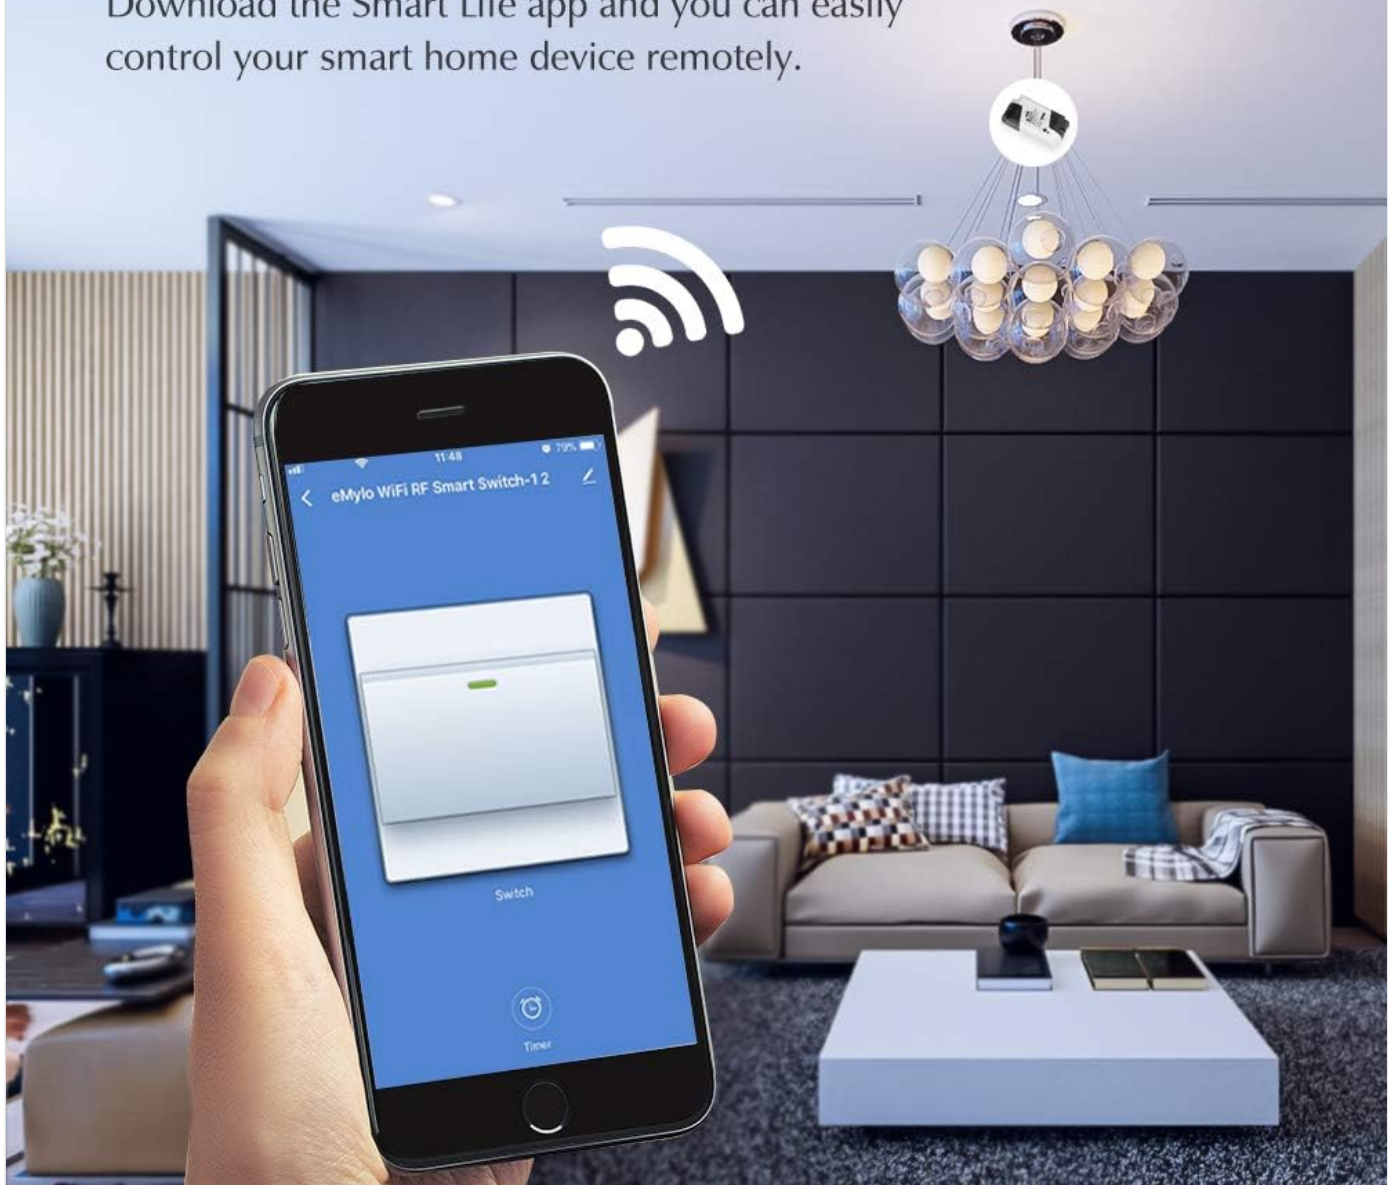


Image 2: Remote control via the Smart Life app. The app allows you to turn devices on or off from your smartphone.

7.2 Voice Control

The eMylo Mini Smart WiFi Switch is compatible with Amazon Alexa and Google Assistant. Link your Smart Life account to your voice assistant app (Alexa or Google Home) to enable voice commands.

- **For Alexa:** "Alexa, turn on [Device Name]"
- **For Google Assistant:** "Hey Google, turn off [Device Name]"

Voice Control

Alexa, turn on the fan

OK



Image 3: Voice control integration with smart assistants like Alexa, allowing hands-free operation of connected devices.

7.3 Timer Schedules

Set custom schedules within the Smart Life app to automatically turn your devices on or off at specific times. This feature helps in energy saving and automating daily routines.

Timer Schedules

Set Schedules to turn off connected devices automatically when not in use to help save energy.


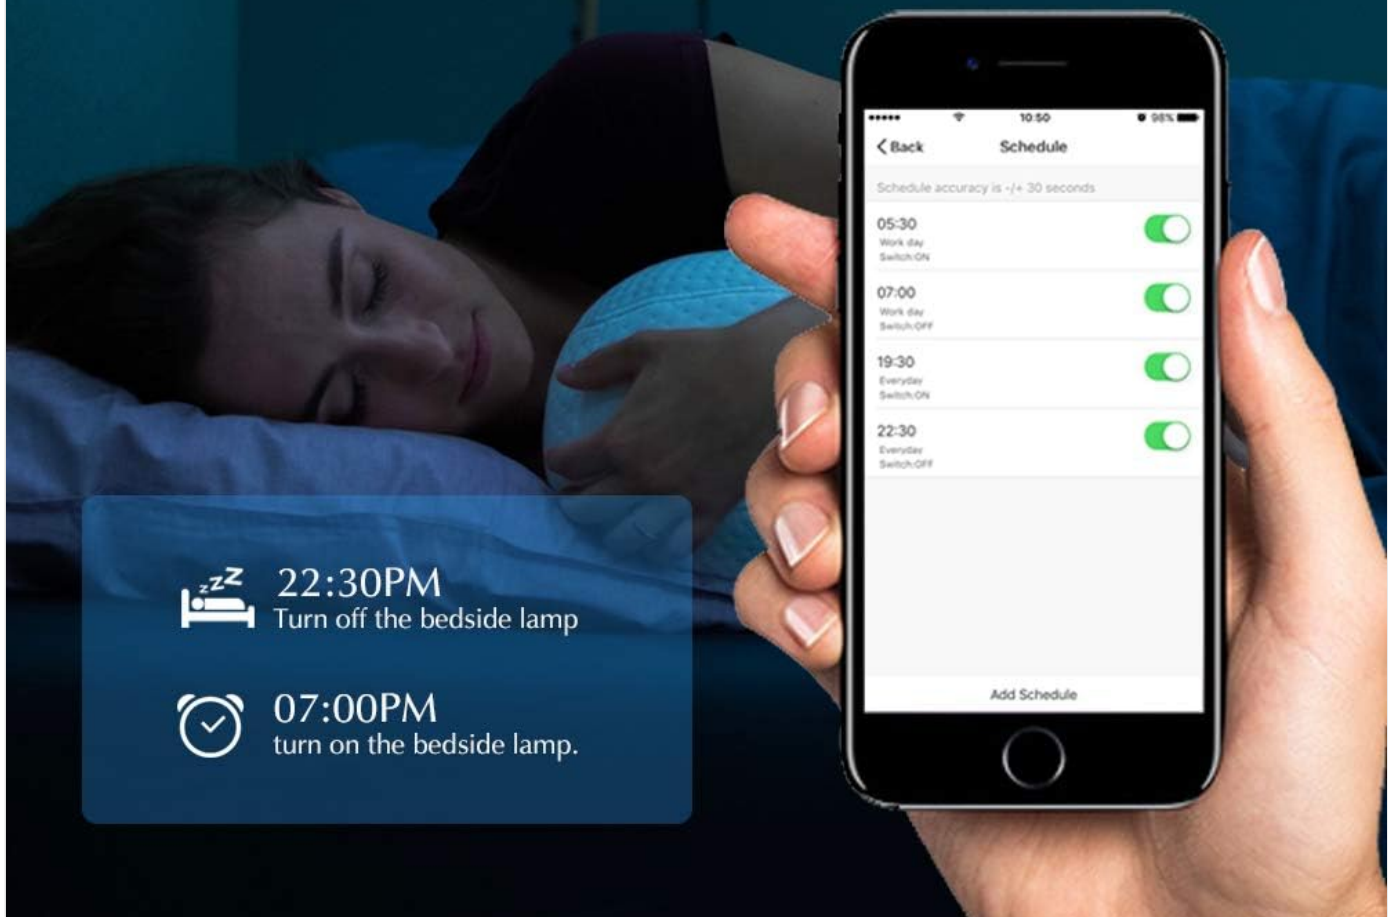


Image 4: Setting timer schedules in the Smart Life app to automate device operation.

7.4 Share Control

You can share control of your smart switch with family members or friends through the Smart Life app, allowing multiple users to manage the connected appliances without needing to re-pair the device.

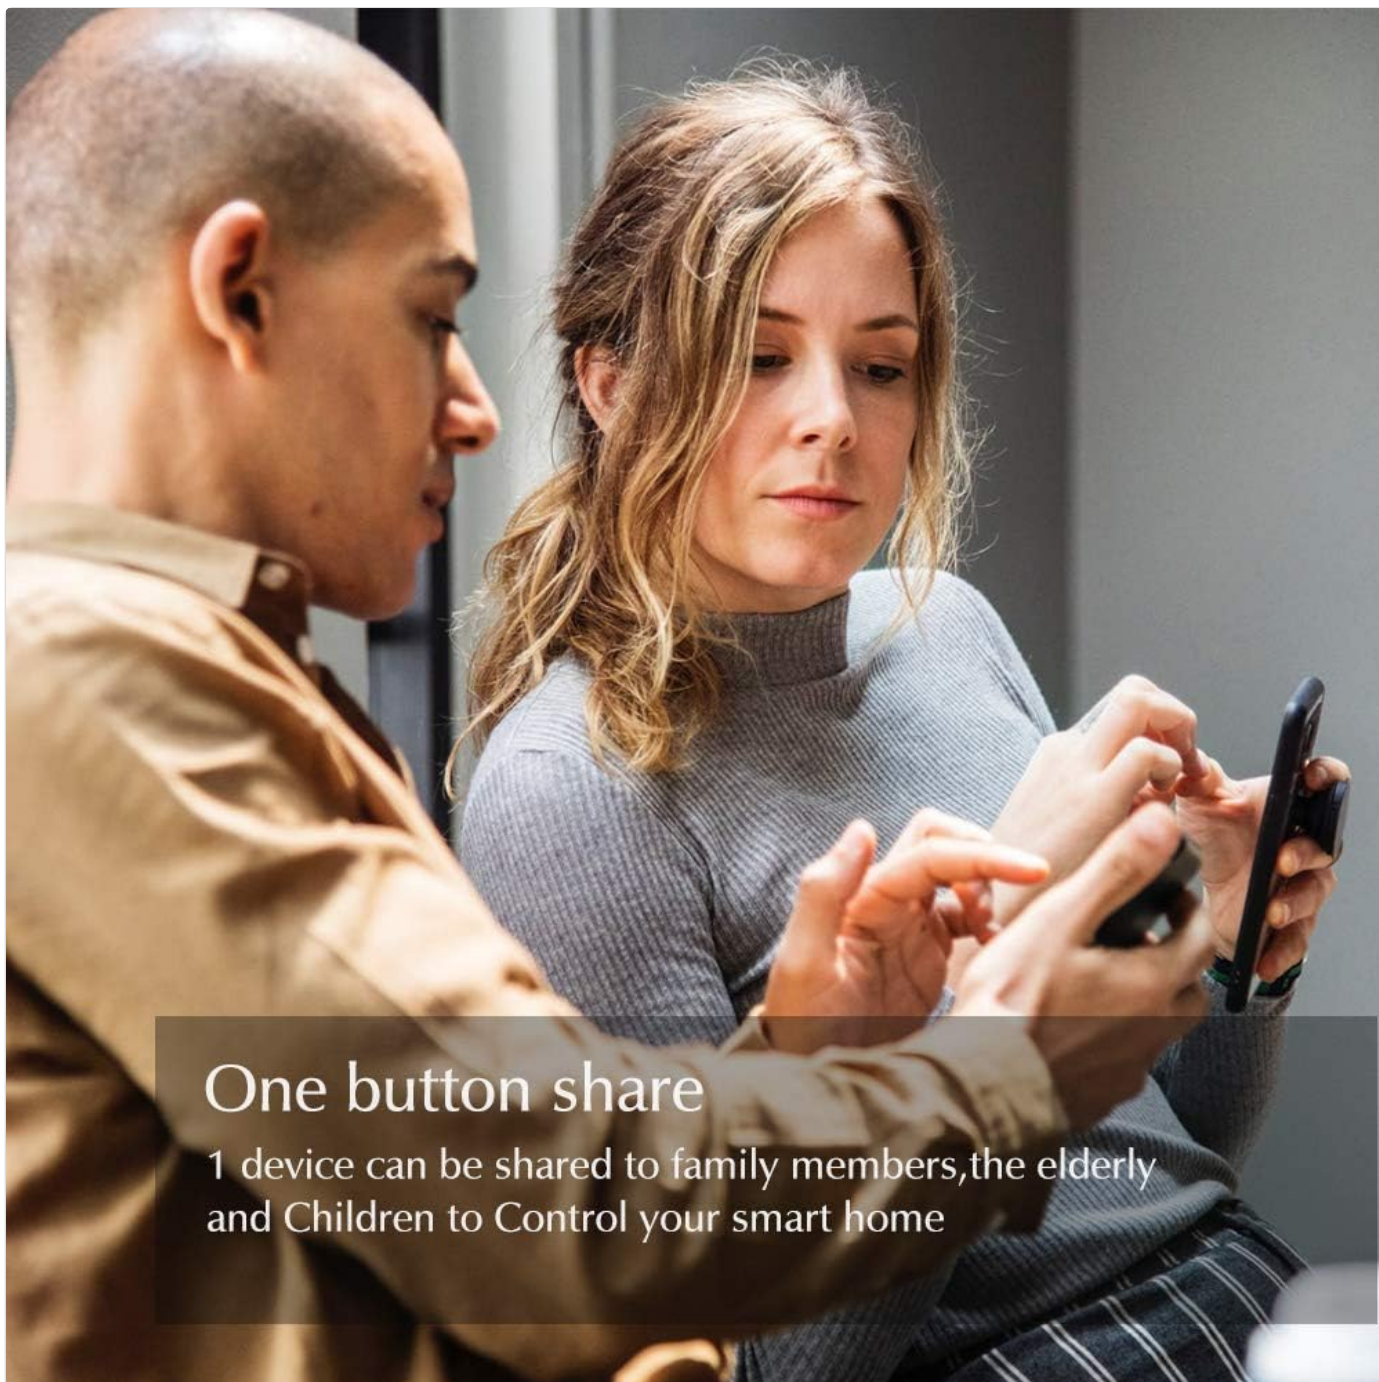

One button share

1 device can be shared to family members, the elderly and Children to Control your smart home

Image 5: Sharing device control with family members for convenient smart home management.

8. MAINTENANCE

- Clean the device with a soft, dry cloth. Do not use liquid cleaners or aerosols.
- Ensure the device is kept in a dry environment and away from direct sunlight.
- Regularly check for any loose wiring connections, especially after initial installation.

9. TROUBLESHOOTING

Problem	Possible Solution
---------	-------------------

Problem	Possible Solution
Device not connecting to Wi-Fi	<ul style="list-style-type: none"> ◦ Ensure your Wi-Fi network is 2.4GHz. 5GHz networks are not supported. ◦ Check Wi-Fi signal strength at the device location. ◦ Verify correct Wi-Fi password entry. ◦ Restart your Wi-Fi router. ◦ Put the device into pairing mode again (rapidly blinking indicator light).
Appliance not responding to switch	<ul style="list-style-type: none"> ◦ Check if the smart switch has power (indicator light on). ◦ Ensure the appliance itself is functional and properly connected to the switch's output. ◦ Verify the wiring connections are secure. ◦ If a wall switch is used, ensure it is turned ON to provide power to the smart switch.
Voice control not working	<ul style="list-style-type: none"> ◦ Ensure your Smart Life account is correctly linked to Alexa or Google Home. ◦ Check the device name in the Smart Life app and use that exact name in your voice commands. ◦ Verify your voice assistant device is connected to the internet.
Device frequently disconnects	<ul style="list-style-type: none"> ◦ Improve Wi-Fi signal strength by moving the router closer or using a Wi-Fi extender. ◦ Ensure there are no strong interferences (e.g., other 2.4GHz devices, thick walls). ◦ Update the Smart Life app to the latest version.

10. WARRANTY AND SUPPORT

For warranty information and technical support, please refer to the purchase platform or contact the seller directly. You can also visit the official Yasorn store for more information: [Yasorn Store](#).