

[Manuals.plus](#) /

› [U`King](#) /

› U`King 36 LED RGB Par Light Instruction Manual (Model ZQ1082X4HUS)

U`King ZQ1082X4HUS

U`King 36 LED RGB Par Light Instruction Manual

Model: ZQ1082X4HUS

INTRODUCTION

Thank you for choosing U`King 36 LED RGB Par Lights. This manual provides essential information for the safe and effective operation of your new stage lighting equipment. Please read it thoroughly before use and retain it for future reference.

The U`King 36 LED RGB Par Light is designed to create dynamic lighting effects for various events and venues. Featuring 36 LED bulbs (12 red, 12 green, 12 blue), it offers a wide range of mixed colors and multiple control modes to enhance any atmosphere.

WHAT'S IN THE BOX

- 36 LED RGB Par Light unit(s)
- Remote Control
- Adjustable Brackets
- Mounting Screws
- User Manual

SETUP

1. Attaching the Brackets

1. Identify the adjustable brackets and mounting screws provided.
2. Align the holes on the brackets with the mounting points on the sides of the par light unit.
3. Secure the brackets using the provided screws, ensuring they are tightened sufficiently to hold the desired angle.

The brackets allow for versatile mounting options, including installation on a T-truss, stage bar, or simply positioning the lights on the floor. You can adjust the angle to direct the light as needed.



Image: U'King 36 LED Par Light with adjustable brackets for various mounting options, demonstrating floor and hanging setups.

2. Power Connection

Connect the integrated power cord to a standard 220V AC power outlet. The unit is corded electric and does not require batteries for operation.

3. Remote Control Activation

If using the remote control, remove the plastic tab from the battery compartment to activate the included battery. The remote is now ready for use.

OPERATING MODES

The U'King 36 LED RGB Par Light offers multiple working modes and control options:


- **Static Color Mode:** Displays a single, fixed color.
- **Strobe Mode:** Produces a rapid flashing effect.
- **Automatic Mode:** Cycles through various pre-programmed lighting effects.
- **Voice Control (Sound Activated) Mode:** Lights react to ambient sound and music.

- **Master-Slave Mode:** Multiple units can be synchronized, with one acting as the master and others as slaves.
- **DMX Mode:** Allows professional control via a DMX console for precise lighting programming.
- **Gradient Mode:** Smoothly transitions between different colors.

Remote Control Functions

The included remote control allows easy selection and adjustment of various modes and settings. One remote can control multiple lights simultaneously. Key functions include:

- Power On/Off
- Mode Selection (Strobe, Jump, Fade, Sound Activated, DMX)
- Brightness Level Adjustment
- Color Adjustment (Red, Green, Blue, Pink, Yellow, Cyan, White, etc.)
- Speed Adjustment for dynamic modes.

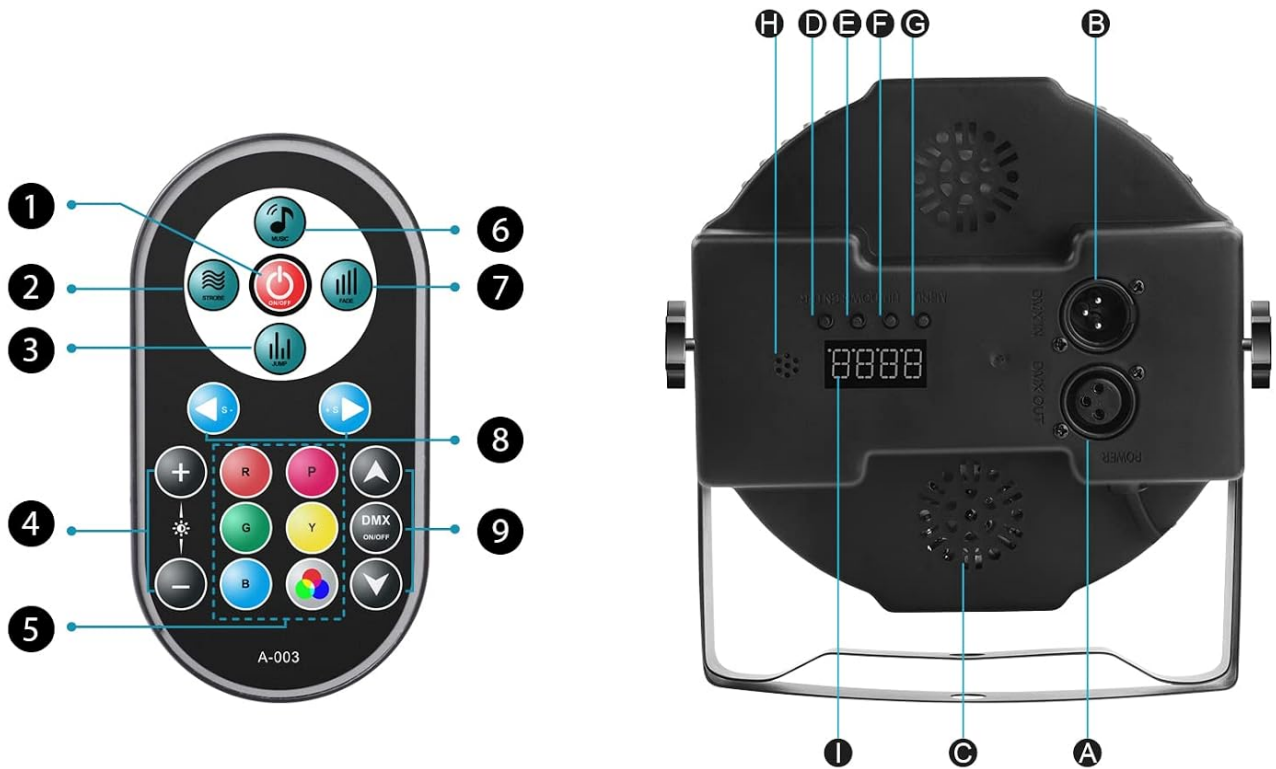

1 ON/OFF	7 Fade mode	A DMX OUT	F DOWN
2 Strobe mode	8 Change the speed levels under any mode	B DMX IN	G ENTER
3 Jump mode	9 DMX adjustment	C FAN	H MIC
4 Brightness leveladjustment		D MENU	I DIGITAL DISPLAY
5 Color adjustment		E UP	
6 Sound activated mode			

Image: Diagram of the remote control and the back panel of the U’King 36 LED Par Light, detailing buttons and ports.

DMX Control

For advanced users, the lights can be connected to a DMX console using a DMX cable. The back panel features DMX In and DMX Out ports for daisy-chaining multiple units and controlling them professionally.

Low Power Consumption Mode

In situations with limited power outlets or to prevent circuit overload, the lights can be set to a low power consumption mode. This reduces the power draw while still providing effective lighting, though at a slightly reduced brightness.

SPECIFICATIONS

Specification	Detail
Brand	U`King
Model Number	ZQ1082X4HUS
Light Source Type	LED
Number of Light Sources	36 (12 Red, 12 Green, 12 Blue)
Wattage	36 Watts
Voltage	220 Volts (AC)
Power Source	Corded Electric
Material	Aluminum, Polyvinyl Chloride (PVC)
Item Weight	6.8 Pounds (for 4-pack)
Product Dimensions	8.66"L x 5.75"W x 3.11"H
Bulb Features	Dimmable
Switch Style	Remote

MAINTENANCE

To ensure the longevity and optimal performance of your U`King 36 LED RGB Par Lights, follow these maintenance guidelines:

- **Cleaning:** Regularly wipe the exterior of the light units with a soft, dry cloth to remove dust and debris. Avoid using abrasive cleaners or solvents.
- **Inspection:** Periodically check the power cords and DMX cables for any signs of damage. Ensure all connections are secure.
- **Storage:** When not in use, store the lights in a cool, dry place away from direct sunlight and extreme temperatures.

TROUBLESHOOTING

If you encounter any issues with your U`King 36 LED RGB Par Lights, refer to the following common troubleshooting tips:

- **Lights not turning on:** Ensure the power cord is securely plugged into a working outlet. Check the remote control battery.
- **Remote control not responding:** Verify the remote control battery is active and correctly inserted. Ensure there are no obstructions between the remote and the light unit.
- **Inconsistent lighting effects:** If using DMX mode, check DMX cable connections and console settings. In Master-Slave mode, ensure the master unit is correctly configured.
- **Circuit breaker tripping:** If multiple lights are connected to a single circuit, switch to low power consumption mode or distribute the lights across different circuits to reduce the load.

OFFICIAL PRODUCT VIDEO

Watch this official product video from U`King Lights for a demonstration of the 36 LED Par Lights in action.

Your browser does not support the video tag.

Video: U`King 36LED RGB Stage Lights - A short demonstration of the light's features and effects.

WARRANTY & SUPPORT

U`King is committed to providing high-quality products and customer satisfaction. For any questions or support needs regarding your 36 LED RGB Par Lights, please feel free to contact us at any time. We will reply to you within 24 hours.

Please refer to your purchase documentation for specific warranty details.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Email

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Details

Submit question

Open the live page

<https://manuals.plus/asin/B07TDF36B8>

More documents and user manuals: <https://manuals.plus/>