

[Manuals.plus](#) /

› [LPHUMEX](#) /

› LPHUMEX Ceiling Fan Remote Control Kit User Manual

LPHUMEX Universal Ceiling Fan Remote Control

LPHUMEX Ceiling Fan Remote Control Kit User Manual

Model: Universal Ceiling Fan Remote Control

INTRODUCTION

This user manual provides detailed instructions for the installation, operation, and maintenance of your LPHUMEX Ceiling Fan Remote Control Kit. This kit is designed to convert traditional pull-chain ceiling fans into wirelessly controlled units, offering convenience with speed, light, and timing functions.

SAFETY INFORMATION

Warning:

- If you have limited electrical knowledge, please consult a professional electrician for assistance with installation.
- Always ensure the main power supply to the ceiling fan is turned off at the circuit breaker before beginning any installation or maintenance.
- Carefully check the wattage of your fan and light. The fan motor should not exceed 145W, and the fan light should not exceed 500W. Do not overload the unit.
- Ensure proper wire connections by verifying the names of each wire before connecting them.

WHAT'S IN THE BOX

Your LPHUMEX Ceiling Fan Remote Control Kit includes the following components:

- 1 x Small Size Remote Control Receiver
- 1 x Wireless Remote Control Transmitter
- 1 x Wall Mount Holder for Remote Control
- Wire Nuts for connections
- Installation Guide (this manual)



Image: The remote control and the compact receiver unit.

Unicersal Fan Remote Control

Change your pull chain fan light into wireless one!
No longer get up to fan light wall switch now!



Most fan Light & lamp

Image: Detailed dimensions of the remote control (5.4 inches long, 1.95 inches wide), receiver (3 inches long, 2.1 inches wide), and the wall mount holder.

PRODUCT FEATURES

- **Compact Design:** The receiver unit features a super small size (3 x 2.1 x 0.98 inches), designed to fit into most ceiling fan canopies, especially those with limited space.
- **Universal Compatibility:** Compatible with approximately 95% of regular AC motor ceiling fan lights, including popular brands like Harbor Breeze, Hunter, Hampton Bay, and Lichler. It converts traditional pull-chain fans to wireless control.
- **Multi-Functions:** Offers 3-speed control (High/Medium/Low) and OFF for the fan. Includes 4 separate timing buttons (1H, 2H, 4H, 8H) for automatic fan shutdown. Features a dedicated button for light ON/OFF control.
- **RF Technology:** Utilizes RF wireless support for a strong signal, allowing remote operation from a distance.
- **No Dimming Function:** Please note that this kit does not provide a dimming function for the light. The light operates as ON/OFF only.



Image: Key advantages of the product, highlighting its compact size and improved performance.

Standard Ones

L*W*D:4.5"*2.1"*1"



Super Small Size Ones

L*W*D:3"*2.1"*1"



Image: A visual comparison showing the smaller footprint of the LPHUMEX receiver (3 inches) compared to a standard receiver (4.5 inches), both 2.1 inches wide.


SETUP AND INSTALLATION

Follow these steps to install your LPHUMEX Ceiling Fan Remote Control Kit:

1. **Prepare for Installation:** Before starting, ensure the power to your ceiling fan is completely off at the circuit breaker. This is critical for safety.
2. **Access Fan Wiring:** Carefully lower the canopy of your ceiling fan to expose the existing wiring connections.
3. **Connect the Receiver:** The receiver unit has clearly labeled wires. Connect them as follows using the provided wire nuts:
 - Connect the receiver's input wires (usually black and white) to the main power supply wires from your ceiling.
 - Connect the receiver's output wires (usually black for fan, blue for light, and white for neutral) to the corresponding wires of your ceiling fan motor and light kit.
 - Ensure all connections are secure.

4. **Position the Receiver:** The compact size of the receiver allows it to fit into most fan canopies. Carefully tuck the receiver and wires into the canopy, ensuring there is enough space and no wires are pinched.
5. **Secure the Canopy:** Reattach the fan canopy securely to the ceiling fan mounting bracket.
6. **Install Remote Holder:** Mount the remote control wall holder in a convenient location using the provided screws.
7. **Insert Batteries:** Insert 2 AAA batteries (not included) into the remote control transmitter.
8. **Restore Power:** Turn the power back on at the circuit breaker.

Advantage of New Edition

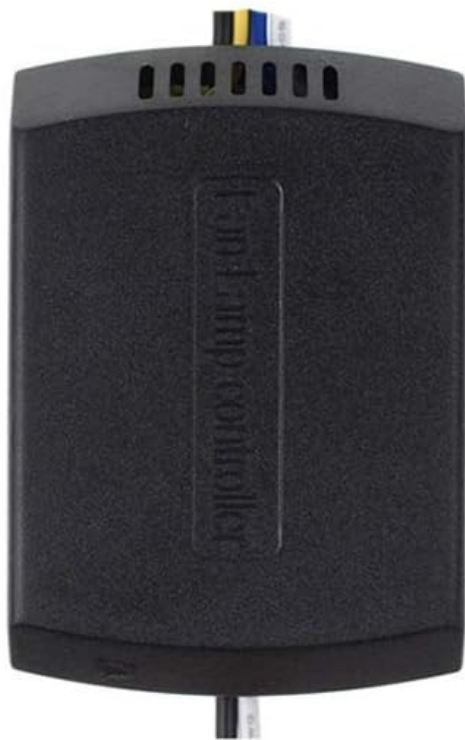

Super Small Size

Longer Life

No Time Delay

New Tech

Fans Not Interfere others

High/Medium/Low works well without delay

Image: Step-by-step wiring diagram showing how to connect the receiver to the main power and the fan/light wires within the fan canopy.

Your browser does not support the video tag.

Video: This video demonstrates the process of adding remote functionality to a pull-chain fan light, showing the receiver installation and remote operation.

OPERATING INSTRUCTIONS

Use the remote control to operate your ceiling fan and light:

- **Fan Speed Control:**
 - Press **HI** for high speed.
 - Press **MED** for medium speed.

- Press **LOW** for low speed.
- Press **STOP** to turn the fan off.

- **Light Control:**

- Press **LIGHT ON/OFF** to turn the light on or off. Note: This kit does not support light dimming.

- **Timing Function:** Set the fan to turn off automatically after a set period:

- Press **1H** for 1 hour.
- Press **2H** for 2 hours.
- Press **4H** for 4 hours.
- Press **8H** for 8 hours.



Image: A ceiling fan operating with the remote control, illustrating the convenience of wireless control.

To ensure optimal performance and longevity of your remote control kit:

- Keep the remote control clean and dry. Avoid exposure to moisture or extreme temperatures.
- Replace batteries in the remote control when its range decreases or buttons become unresponsive.
- Periodically check wire connections within the fan canopy to ensure they remain secure.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Fan or Light not responding to remote.	Low or dead batteries in remote. Incorrect wiring. Power off at circuit breaker.	Replace remote batteries. Check wiring connections as per installation guide. Ensure power is on at the circuit breaker.
Remote signal is weak or intermittent.	Obstructions between remote and receiver. Interference from other RF devices. Low batteries.	Ensure clear line of sight. Move away from other electronic devices. Replace remote batteries.
Light does not dim.	This model does not support dimming.	The light function is strictly ON/OFF. This is not a malfunction.
Fan motor or light exceeding wattage limits.	Incompatible fan/light.	Ensure fan motor is less than 145W and light is less than 500W. Do not overload.

SPECIFICATIONS

- **Product Dimensions:** 3 x 2.1 x 0.98 inches (Receiver)
- **Item Weight:** 6.4 ounces
- **Model Number:** Universal Ceiling Fan Remote Control
- **Batteries:** 2 AAA batteries required (for remote control)
- **Max Fan Motor Wattage:** 145W
- **Max Light Wattage:** 500W
- **Special Feature:** Timing function (1H, 2H, 4H, 8H)
- **Color:** White
- **Compatible Devices:** Ceiling Fans (AC motor only)
- **Control Type:** RF Wireless

Compatibility

Fan Motor:

Compatible with most AC motor ceiling fan lights

No reverse function

Do not work with DC motor

*Not work for ceiling fan lights
with Bluetooth, reverse functions,
and negative ion functions .*



*Please double check the size of your fan canopy size before
order to make sure there is enough space to put this remote receiver.
This receiver is the smallest size in the market, but for some slimline
ceiling fan, it maybe too thick and can not use.
This fan remote can not work for desk fan, stand fan, tower fan.
Any questions, please contact us via amazon message befor order!*

Image: Compatibility details, indicating suitability for AC motor ceiling fans and not for DC motors, Bluetooth, reverse, or negative ion functions. Also notes the receiver size and types of fans it cannot work with (desk, stand, tower fans).

WARRANTY AND SUPPORT

For any questions, concerns, or support regarding your LPHUMEX Ceiling Fan Remote Control Kit, please contact the seller directly through the Amazon messaging system. Please refer to your purchase details for specific warranty information, as terms may vary.

Manufacturer: LPHUMEX