



[Manuals.plus](#) /

› [Somfy](#) /

› Somfy Situo Pure II RTS Single Channel Remote User Manual

Somfy 1870571A

Somfy Situo Pure II RTS Single Channel Remote User Manual

Model: 1870571A



Image: Somfy Situo Pure II RTS Single Channel Remote, showcasing its sleek white design with up, down, and 'my' buttons.

1. INTRODUCTION

The Somfy Situo Pure II RTS Single Channel Remote is designed for intuitive control of one motorized product or a single group of motorized products. This remote offers simple operation with dedicated Up, My, and Down buttons, allowing you to easily manage your Somfy RTS-enabled devices.

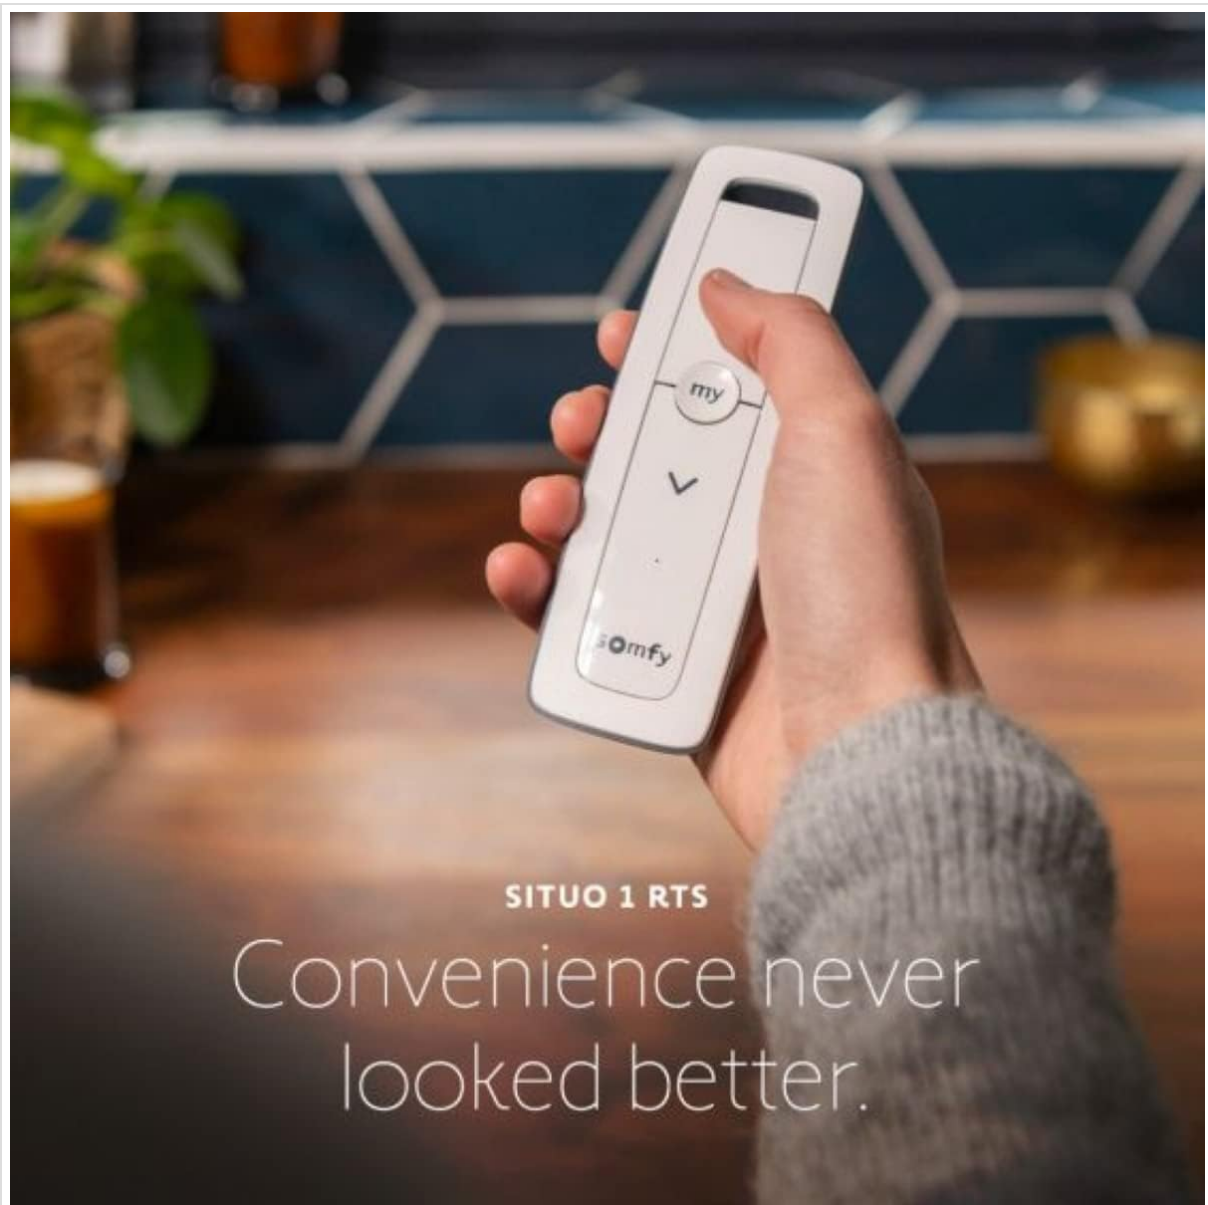


Image: A hand holding the Somfy Situo Pure II RTS remote, illustrating its ergonomic design and ease of use.

2. PRODUCT FEATURES

- **Single Channel Control:** Operates one individual motorized product or a synchronized group of products.
- **Intuitive Buttons:** Features dedicated Up, My (Stop/Favorite), and Down buttons for straightforward control.
- **'My' Function:** Allows users to program and instantly recall a preferred intermediate position for their application.
- **RTS Technology:** Utilizes Radio Technology Somfy (RTS) for reliable wireless communication.
- **Optimal Range:** Provides a control range of up to 65 feet under ideal conditions.
- **Ergonomic Design:** Crafted for comfortable handling and a modern aesthetic.

Three buttons.
Endless
possibilities.

UP
FAVORITE
DOWN

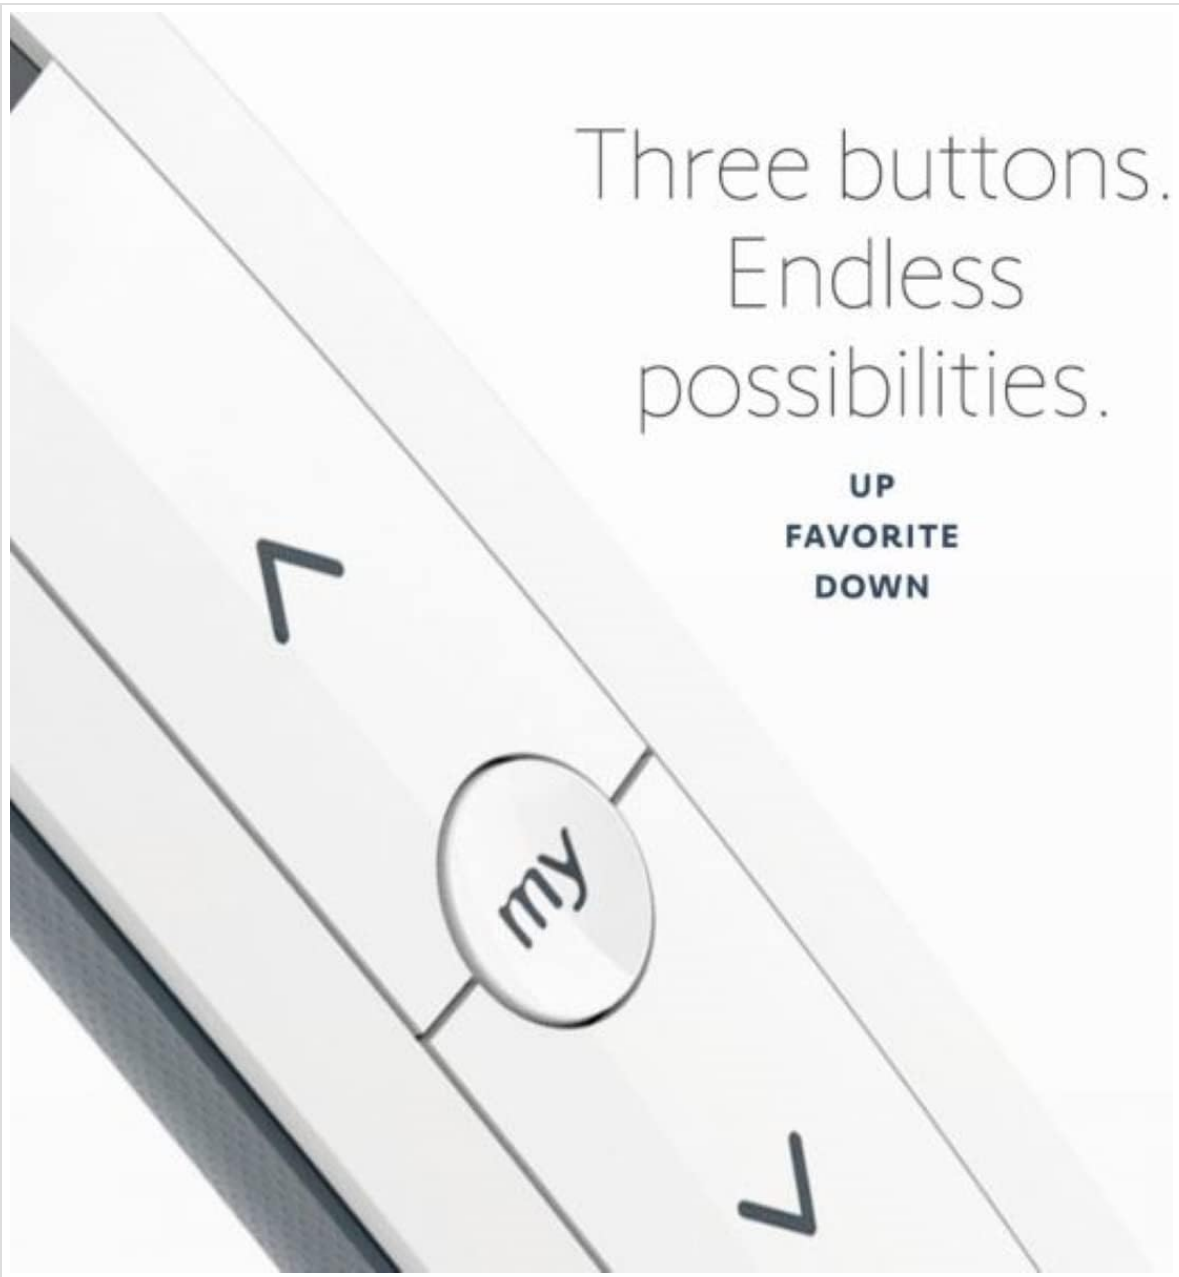


Image: Close-up of the remote's three buttons (Up, My, Down), highlighting their clear labeling.

One window or group.

SINGLE ZONE CONTROL



Image: A living room scene showing a single window shade, illustrating the remote's single zone control capability.

3. GETTING STARTED

3.1. Battery Installation

The Somfy Situo Pure II RTS remote requires one CR2 battery (included). To install or replace the battery:

1. Locate the battery compartment cover on the back of the remote.
2. Gently slide or pry open the cover.
3. Insert the CR2 battery, ensuring correct polarity (+/-).
4. Replace the battery compartment cover securely.

3.2. Initial Pairing / Programming

To control your Somfy RTS motorized product, the remote must be paired with the motor. The exact programming procedure may vary slightly depending on your specific Somfy motor and existing setup. Generally, there are two main methods:

- **Using an Existing Remote:** If you have an existing, already programmed Somfy RTS remote for the motor, you can typically use it to put the motor into programming mode and then add the new Situo Pure II remote. Refer to your motor's specific instructions for this process, which often involves pressing the

'PROG' button on the existing remote until the motor jogs.

- **Direct Motor Programming:** If you do not have an existing remote, you may need to access the motor's 'PROG' button directly (often a small recessed button) or cycle power to the motor to initiate programming mode. Consult your motor's manual for precise steps.

Note: For detailed programming instructions, it is highly recommended to refer to the specific installation guide for your Somfy motor or the Somfy website for video tutorials. Customer reviews indicate that using an existing remote for programming is often the most straightforward method.

4. OPERATING INSTRUCTIONS

Once paired, operating your Somfy RTS product with the Situø Pure II remote is simple:

- **Up Button (^):** Press to move your motorized product upwards (e.g., raise a shade, open an awning).
- **Down Button (v):** Press to move your motorized product downwards (e.g., lower a shade, close an awning).
- **'My' Button (● my ●):**
 - **Stop:** During movement, press the 'my' button to immediately stop the product at its current position.
 - **Favorite Position:** If a favorite position has been programmed, a quick press of the 'my' button will send the product to that pre-set position.
 - **Programming Favorite Position:** To set a favorite position, move the product to your desired intermediate position using the Up/Down buttons, then press and hold the 'my' button until the product jogs. This position is now saved.

5. CARE AND MAINTENANCE

5.1. Battery Replacement

Replace the CR2 battery when the remote's range decreases or if the indicator light (if present) signals a low battery. Follow the steps in Section 3.1.

5.2. Cleaning

Clean the remote with a soft, dry cloth. Do not use abrasive cleaners, solvents, or excessive moisture, as these can damage the remote's finish or internal components.

6. TROUBLESHOOTING

If your Somfy Situø Pure II RTS remote is not functioning as expected, consider the following:

Problem	Possible Cause	Solution
Remote does not control the product.	Low or dead battery. Remote not paired with motor. Motor not receiving signal.	Replace battery. Re-attempt pairing procedure (see Section 3.2). Ensure remote is within range and no obstructions are blocking the signal.

Problem	Possible Cause	Solution
Product only moves intermittently or range is reduced.	Low battery. Interference.	Replace battery. Minimize sources of radio interference (e.g., other wireless devices).
'My' function not working or setting.	Favorite position not programmed correctly.	Ensure you hold the 'my' button until the product jogs to save the position. If issues persist, try resetting the motor (consult motor manual) and re-programming.

If troubleshooting steps do not resolve the issue, please contact Somfy customer support.

7. SPECIFICATIONS

Feature	Detail
Model Number	1870571A
Brand	Somfy
Technology	RTS (Radio Technology Somfy)
Channels	1 (Single Channel)
Color	White
Power Source	1 x CR2 Battery (included)
Item Weight	2.89 ounces
Package Dimensions	6.38 x 1.93 x 1.34 inches
Max Number of Supported Devices	1 (or 1 group)
Compatible Devices	Somfy RTS motorized products

8. WARRANTY AND SUPPORT

8.1. Warranty Information

For specific warranty details regarding your Somfy Situo Pure II RTS remote, please refer to the warranty card included with your product or visit the official Somfy website. Warranty terms typically cover manufacturing defects for a specified period from the date of purchase.

8.2. Customer Support

Should you require further assistance with installation, programming, troubleshooting, or general inquiries, please contact Somfy customer support. You can find contact information and additional resources, including FAQs and video tutorials, on the official Somfy website:

[Visit Somfy Official Website](#)

© 2025 Somfy. All rights reserved.



Image: Somfy company logo.