

## Lenco KCR-200WH

# Lenco KCR-200 Under-Cabinet DAB+ Bluetooth Radio User Manual

Model: KCR-200WH | Brand: Lenco

## 1. INTRODUCTION

Thank you for choosing the Lenco KCR-200 Under-Cabinet DAB+ Bluetooth Radio. This manual provides essential information for the safe and efficient use of your new device. Please read it thoroughly before installation and operation, and retain it for future reference.

The Lenco KCR-200 is a versatile kitchen radio designed for convenient placement, either freestanding on a counter or mounted under a cabinet. It features DAB+ and FM radio reception, Bluetooth connectivity for wireless audio streaming, an integrated clock, and a timer function.

## 2. SAFETY INSTRUCTIONS

- Read all instructions carefully before use.
- Do not expose the unit to rain or moisture to prevent fire or electric shock.
- Ensure the power adapter voltage matches your local power supply.
- Do not block any ventilation openings.
- Protect the power cord from being walked on or pinched.
- Unplug the unit during lightning storms or when unused for long periods.
- Refer all servicing to qualified service personnel.
- Keep the unit away from direct sunlight, heat sources, and strong magnetic fields.
- Do not use abrasive cleaners or solvents on the unit.

## 3. PACKAGE CONTENTS

Please check that all items listed below are included in your package:

- Lenco KCR-200 Under-Cabinet DAB+ Bluetooth Radio
- Remote Control
- Power Adapter
- Mounting Kit (screws, spacers, wall plugs)
- User Manual (this document)



**Figure 3.1:** Included mounting hardware for under-cabinet installation. This kit contains screws, plastic spacers, and wall plugs to secure the radio.

## 4. PRODUCT OVERVIEW

Familiarize yourself with the main components and controls of your Lenco KCR-200 radio.



**Figure 4.1:** Front view of the Lenco KCR-200 radio and its remote control. The radio features a central display, control buttons, and volume controls.



**Figure 4.2:** Detailed view of the control panel. Key buttons include Power/Source, Light, numbered presets (1-5), Scan, Skip/Tune, Clock Set, Memory, Timer, Info/Menu, Enter, and Volume Up/Down.

## 4.1 Front Panel Controls

- **POWER/SOURCE Button:** Press to turn on/off, press to cycle through input sources (DAB+, FM, Bluetooth).
- **LIGHT Switch:** Toggles the under-cabinet light on or off.
- **PRESET Buttons (1-5):** Store and recall favorite radio stations.
- **SCAN Button:** Initiates a scan for radio stations.
- **SKIP/TUNE Buttons (◀◀ / ▶▶):** Navigate through stations or tracks.
- **CLOCK SET Button:** Enters clock setting mode.
- **MEMORY Button:** Used to save preset stations.
- **TIMER Button:** Sets the kitchen timer.
- **INFO/MENU Button:** Displays station information or accesses the menu.
- **ENTER Button:** Confirms selections in the menu.
- **VOLUME Buttons (+/-):** Adjusts the audio volume.

## 4.2 Display

The central LCD display shows current time, radio station information, Bluetooth status, and menu options.

## 5. SETUP

### 5.1 Power Connection

Connect the supplied power adapter to the DC IN socket on the back of the unit and then plug it into a standard wall outlet. The unit will power on in standby mode.



Figure 5.1: Rear view of the radio, illustrating the power cable connected to the DC IN port. Ensure the cable is securely inserted.

### 5.2 Remote Control Battery Installation

The remote control requires 2 AAA batteries (not included). Open the battery compartment on the back of the remote, insert the batteries observing the correct polarity (+/-), and close the compartment.

### 5.3 Placement Options

The Lenco KCR-200 offers two main placement options:

#### 5.3.1 Freestanding on a Countertop

Place the radio on a stable, flat surface such as a kitchen countertop. Ensure there is adequate ventilation around the unit.



**Figure 5.2:** The radio positioned on a kitchen counter, demonstrating its freestanding use. Its compact design allows for flexible placement.

### 5.3.2 Under-Cabinet Mounting

The included mounting kit allows you to install the radio securely under a kitchen cabinet. Follow these steps:

1. Choose a suitable location under a cabinet, ensuring it is away from heat sources and allows for easy access to controls and power.
2. Use the provided template (if included, otherwise measure carefully) to mark the drilling points on the underside of the cabinet.
3. Drill pilot holes at the marked positions.
4. Attach the mounting brackets (if separate) or position the radio directly, using the provided screws and spacers to secure it firmly to the cabinet. Ensure the radio is level.
5. Connect the power adapter after mounting.



**Figure 5.3:** The radio mounted discreetly under a kitchen cabinet, showcasing its space-saving installation. This setup keeps countertops clear.

## 6. OPERATING INSTRUCTIONS

### 6.1 Basic Operation

- **Power On/Off:** Press the **POWER/SOURCE** button to turn the unit on or off.
- **Source Selection:** While the unit is on, press the **POWER/SOURCE** button repeatedly to cycle through DAB+, FM, and Bluetooth modes.
- **Volume Adjustment:** Use the **VOLUME +** and **VOLUME -** buttons to increase or decrease the sound level.
- **Light Control:** Use the **LIGHT** switch to turn the integrated under-cabinet light on or off.

### 6.2 DAB+ Radio

1. Switch to DAB+ mode using the **POWER/SOURCE** button.
2. The radio will automatically perform a full scan for available DAB+ stations upon first use. To initiate a manual scan, press the **SCAN** button.
3. Once scanning is complete, use the **SKIP/TUNE** buttons (◀◀ / ▶▶) to navigate through the list of available stations.
4. **Saving Presets:**
  - a. Tune to the desired DAB+ station.
  - b. Press and hold the **MEMORY** button until "Preset Store" appears on the display.
  - c. Use the **SKIP/TUNE** buttons to select a preset number (1-5).
  - d. Press **ENTER** to confirm.

5. **Recalling Presets:** Briefly press one of the numbered **PRESET** buttons (1-5) to recall a saved station.
6. **Information Display:** Press the **INFO/MENU** button to cycle through various information such as program type, signal strength, bit rate, and date/time.

## 6.3 FM Radio

1. Switch to FM mode using the **POWER/SOURCE** button.
2. **Automatic Scan:** Press and hold the **SCAN** button to automatically scan and store available FM stations.
3. **Manual Tuning:** Briefly press the **SKIP/TUNE** buttons ( $\blacktriangleleft\blacktriangleright$  /  $\blacktriangleright\blacktriangleright$ ) to fine-tune the frequency. Press and hold them to auto-scan to the next strong station.
4. **Saving Presets:** The process is similar to DAB+ radio. Tune to the desired FM station, then press and hold **MEMORY**, select a preset number (1-5) with **SKIP/TUNE**, and press **ENTER**.
5. **Recalling Presets:** Briefly press one of the numbered **PRESET** buttons (1-5).

## 6.4 Bluetooth Operation

1. Switch to Bluetooth mode using the **POWER/SOURCE** button. The display will show "Bluetooth" and the unit will enter pairing mode, indicated by a flashing Bluetooth icon.
2. On your Bluetooth-enabled device (e.g., smartphone, tablet), enable Bluetooth and search for available devices.
3. Select "KCR-200" from the list of devices. Once paired, the Bluetooth icon on the radio's display will stop flashing and remain solid.
4. You can now play audio from your device through the Lenco KCR-200. Use your device or the radio's **SKIP/TUNE** buttons to control playback (play/pause, skip tracks).
5. The maximum Bluetooth range is approximately 10 meters (33 feet).

## 6.5 Clock and Timer Functions

### 6.5.1 Setting the Clock

The clock is usually synchronized automatically via DAB+ signal. If manual adjustment is needed:

1. Press and hold the **CLOCK SET** button.
2. Use the **SKIP/TUNE** buttons to adjust the hour, then press **ENTER**.
3. Repeat for minutes, then press **ENTER** to save.

### 6.5.2 Using the Kitchen Timer

The timer function is useful for cooking or other timed activities.

1. Press the **TIMER** button.
2. Use the **SKIP/TUNE** buttons to set the desired countdown time (e.g., minutes and seconds).
3. Press **ENTER** to start the timer.
4. An alarm will sound when the timer reaches zero. Press any button to stop the alarm.

## 7. MAINTENANCE

### 7.1 Cleaning

- Always unplug the unit from the power outlet before cleaning.
- Use a soft, dry cloth to wipe the exterior surfaces.

- For stubborn stains, slightly dampen the cloth with water or a mild detergent, then wipe dry immediately.
- Do not use abrasive cleaners, waxes, or solvents as they may damage the finish.

## 7.2 General Care

- Avoid placing the unit in direct sunlight or near heat sources.
- Do not expose the unit to extreme temperatures, humidity, or dust.
- If the unit is not used for an extended period, unplug it from the power outlet.

## 8. TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power adapter not connected or faulty outlet.	Ensure the power adapter is securely plugged into the unit and a working wall outlet. Try a different outlet.
No sound	Volume is too low or muted; incorrect source selected.	Increase the volume. Press the <b>POWER/SOURCE</b> button to select the correct input (DAB+, FM, or Bluetooth).
Poor radio reception (DAB+/FM)	Weak signal; antenna not properly positioned.	Ensure the antenna is fully extended and positioned for optimal reception. Perform a new scan for stations. Move the unit to a different location.
Bluetooth pairing fails	Bluetooth not enabled on device; device too far; unit not in pairing mode.	Ensure Bluetooth is enabled on your device. Place your device within 10 meters of the radio. Make sure the radio is in Bluetooth mode and "KCR-200" is selected on your device.
Remote control not working	Batteries are dead or incorrectly inserted; obstruction between remote and unit.	Replace the AAA batteries in the remote control, ensuring correct polarity. Remove any obstructions between the remote and the radio's sensor.

## 9. SPECIFICATIONS

<b>Model</b>	KCR-200WH
<b>Brand</b>	Lenco
<b>Color</b>	White
<b>Radio Bands</b>	DAB+, FM
<b>Connectivity</b>	Bluetooth
<b>Bluetooth Range</b>	Up to 10 meters (33 feet)
<b>Special Features</b>	Integrated Clock, Kitchen Timer, Under-cabinet Light
<b>Power Source</b>	AC Power Adapter (main unit), 2 x AAA batteries (remote control)
<b>Weight</b>	900 Grams

## 10. WARRANTY AND SUPPORT


Lenco products are designed and manufactured to the highest quality standards. In the unlikely event of a problem with your product, please refer to the warranty conditions provided with your purchase or visit the official Lenco website for support information.

For technical assistance, troubleshooting, or spare parts inquiries, please contact Lenco customer support through their official website or the retailer where the product was purchased. Please have your model number (KCR-200WH) and proof of purchase ready.

Official Lenco Website: [www.lenco.com](http://www.lenco.com)

### Related Documents

	<p><a href="#">Lenco KCR-200 Kitchen Radio User Manual</a></p> <p>User manual for the Lenco KCR-200 kitchen radio, detailing features like DAB+/FM reception, Bluetooth connectivity, light, and timer functions. Includes setup, operation, and troubleshooting guides.</p>
	<p><a href="#">Lenco CR-650 DAB+FM Clock Radio with Bluetooth and Wireless Charging</a></p> <p>Discover the Lenco CR-650, a versatile DAB+/FM clock radio featuring Bluetooth 5.0 for wireless music streaming and integrated wireless charging for your smartphone. Enjoy high-quality sound, multiple presets, dual alarms, and nature sounds for a pleasant wake-up experience.</p>
	<p><a href="#">Lenco CR-615 DAB+FM Clock Radio with Time Projection User Manual</a></p> <p>Comprehensive user manual for the Lenco CR-615 DAB+/FM clock radio. This guide details setup, operation, features such as time projection and alarms, DAB/FM radio functionality, and technical specifications. Includes multilingual instructions.</p>

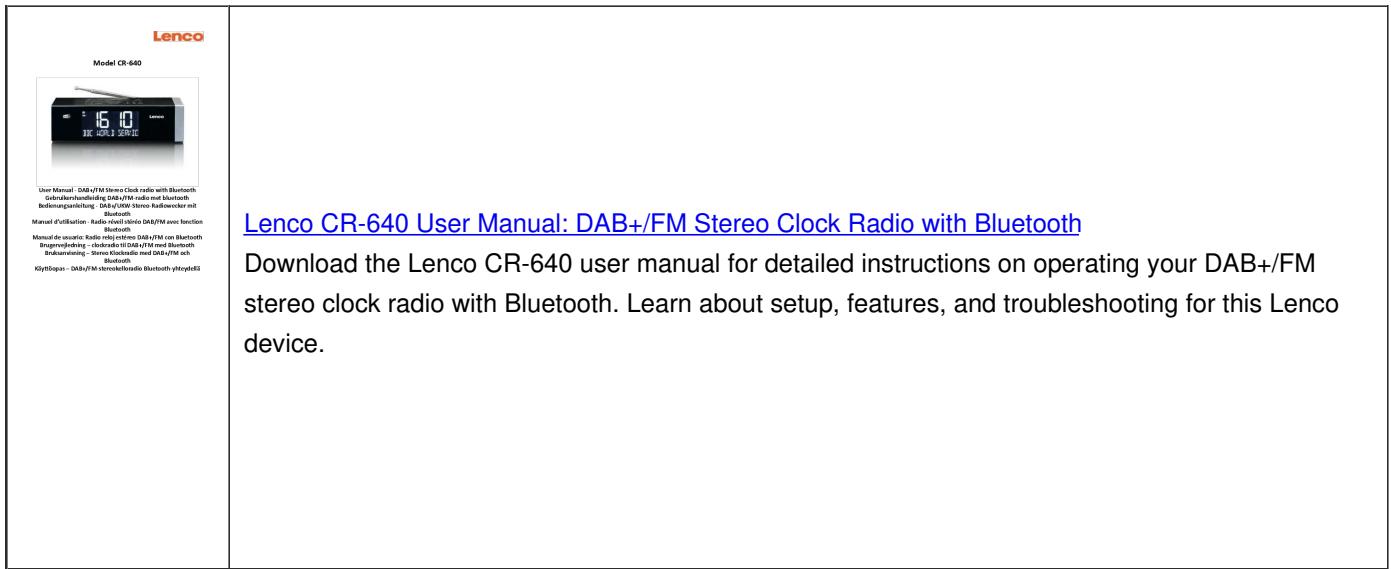

## Documents - Lenco – KCR-200WH




[\[pdf\]](#)

Untitled Produktdatenblatt Lenco Küchenunterbauradio KCR 200WH DAB Bluetooth weiss 630996

D630996 D pollin at media 71 2a 6a 1701723368 |||

KCR-200 Kitchen DAB /FM radio with bluetooth, light and timer 240MM 62MM EN DAB radio Bluetooth White LED display PLL FM radio with RDS 5 preset buttons LED lighting Clock Timer 2 feets Stereo speakers included: Mounting kit, AC Adaptor, Remote control NL DAB radio Bluetooth Witt...

lang:es **score:18** filesize: 125.06 K page\_count: 1 document date: 2022-10-08

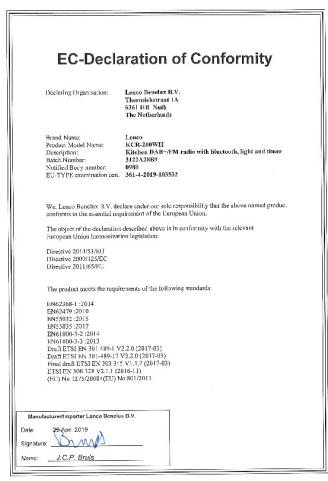

[\[pdf\]](#) Declaration of Conformity

StĂ¡hnout 554 75 kB RadiopĂ¡jĂ maĂ s DAB Lenco KCR 200WH bĂ lĂ  DATART doc 4582034 datart cz document 4 3 0 |||

...

lang:es **score:17** filesize: 554.75 K page\_count: 1 document date: 2021-03-29