

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Maxxima](#) /

› [Maxxima 24 inch LED Under Cabinet Light Instruction Manual](#)

Maxxima MSL-24140W

Maxxima 24 inch LED Under Cabinet Light Instruction Manual

Model: MSL-24140W | Brand: Maxxima

PRODUCT OVERVIEW

The Maxxima 24-inch LED Under Cabinet Light provides brilliant, energy-efficient illumination for various indoor spaces. Designed for easy installation, this light features a warm white 3000K output, an integrated on/off switch, and a detachable power cord, making it a versatile lighting solution for kitchens, bathrooms, closets, and offices.

Key Features:

- 24-Inch LED Cabinet Light:** Boasting 1200 lumens, it provides brilliant under-cabinet lighting, ideal for kitchens, bathrooms, closets, and offices. Enhance your environment with this versatile lighting solution.
- Versatile Strip Lighting:** The perfect solution for various spaces. Whether it's under cabinet lighting, strip lighting, or counter lighting, this product is suitable for any place where illumination is required.
- 5-foot Detachable Power Cord:** 16.7" spacing between mounting screws, installation becomes effortless, making it easier than ever to set up your lighting solution with convenience and precision.
- 3000K Warm White Light:** Emitting a comforting 3000K warm white light with 80 CRI, 14 Watt energy-efficient LED, 80 Watt equivalent of an incandescent bulb. Easy installation keyhole mounting feature with screws included.
- Convenient On/Off Switch:** For easy control of the LED cabinet light.
- Compact Dimensions:** Strip lighting measures 24" W x 1.25" H x 1.5" D, making it ideal for small spaces. With a 120V AC power source, it offers easy installation, ensuring convenience and flexibility in any location.

SETUP AND INSTALLATION

Before beginning installation, ensure the power supply to the installation area is turned off at the circuit breaker. This product is designed for indoor use only.

Package Contents:

- Maxxima 24-inch LED Under Cabinet Light
- Screws for mounting
- 5-foot detachable power cord
- White frosted diffuser (pre-installed)

Installation Steps:

- 1. Prepare the Installation Area:** Identify the desired location under your cabinet. Ensure the surface is clean and dry. Consider the placement of the power outlet and the length of the detachable power cord.
- 2. Mark Mounting Points:** The light fixture has keyhole mounting features. Use the light fixture itself or a template to mark the two mounting screw locations on the underside of the cabinet. The spacing between mounting screws is approximately 16.7 inches.
- 3. Install Mounting Screws:** Drill small pilot holes at the marked locations. Insert the provided screws into the pilot holes, leaving a small gap between the screw head and the cabinet surface.
- 4. Mount the Light Fixture:** Align the keyhole slots on the back of the light fixture with the installed screws. Slide the fixture into place, ensuring the screw heads fit securely into the narrow part of the keyholes. Gently tighten the screws to secure the fixture, being careful not to overtighten.
- 5. Connect Power:** Plug the 5-foot detachable power cord into the light fixture. Then, plug the other end of the power cord into a standard 120V AC power outlet.
- 6. Test the Light:** Restore power to the circuit. Use the integrated on/off switch located on the side of the fixture to turn the light on and off.



Figure 1: Maxxima 24-inch LED Under Cabinet Light, showing its full length and slim profile.

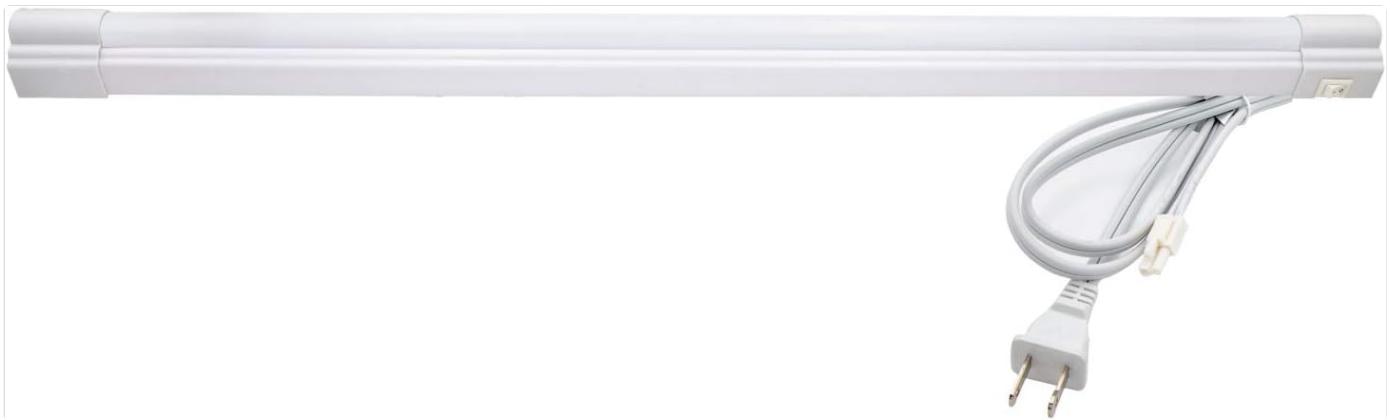


Figure 2: The light fixture with its detachable 5-foot power cord, ready for connection.



Figure 3: Detail of the integrated on/off rocker switch for convenient operation.



Figure 4: Example of the Maxxima LED light installed under a kitchen cabinet, providing bright task lighting.

For a detailed visual guide, you may refer to the official [Installation Manual \(PDF\)](#).

OPERATING INSTRUCTIONS

Operating the Maxxima LED Under Cabinet Light is straightforward:

- **Power On/Off:** Locate the rocker switch on the side of the light fixture. Press the switch to the 'I' position to turn the light ON. Press the switch to the 'O' position to turn the light OFF.
- **Brightness:** This model provides a fixed brightness of 1200 lumens. There are no dimming functions on this specific unit.

MAINTENANCE

The Maxxima LED Under Cabinet Light is designed for minimal maintenance. Follow these guidelines to ensure optimal

performance and longevity:

- **Cleaning:** Disconnect the power before cleaning. Use a soft, dry cloth to wipe the surface of the light fixture. For stubborn marks, a slightly damp cloth with mild soap can be used, followed by drying thoroughly. Avoid abrasive cleaners, solvents, or harsh chemicals, as these can damage the finish or electrical components.
- **Bulb Replacement:** The LED light source is integrated and not user-replaceable. The LEDs are designed for long-term use.
- **Inspection:** Periodically check the power cord and plug for any signs of damage. Ensure the mounting screws remain tight and secure.

TROUBLESHOOTING

If you encounter issues with your Maxxima LED Under Cabinet Light, refer to the following common troubleshooting steps:

Problem	Possible Cause	Solution
Light does not turn on.	No power to the outlet. Light switch is in the OFF position. Loose power cord connection. Circuit breaker tripped.	Check if the outlet is working by plugging in another device. Ensure the rocker switch on the light is in the 'I' (ON) position. Verify the power cord is securely plugged into both the fixture and the wall outlet. Check your home's circuit breaker panel and reset any tripped breakers.
Light flickers or is dim.	Unstable power supply. Loose connection.	Ensure the power outlet provides stable 120V AC. Check all connections for tightness.
Light makes unusual noise.	Internal component issue.	Immediately unplug the light. Do not attempt to repair. Contact customer support.

If the problem persists after trying these steps, please contact Maxxima customer support for further assistance.

SPECIFICATIONS

Attribute	Detail
Brand	Maxxima
Model Name	MSL-24140W
Size	24 Inch
Product Dimensions	24" L x 1.5" W x 1.25" H
Item Weight	10.2 ounces
Color	Warm White
Light Color Temperature	3000K
Brightness	1200 Lumens
Wattage	14 watts

Attribute	Detail
Voltage	120 Volts
Light Source Type	LED
Material	Polycarbonate
Indoor/Outdoor Usage	Indoor use only
Power Source	Corded Electric
Switch Type	Rocker
Certification	ETL Listed

WARRANTY INFORMATION

This Maxxima LED Under Cabinet Light is covered by a **5-year warranty**. This warranty covers defects in materials and workmanship under normal use. For warranty claims or further details, please contact Maxxima customer support.


CUSTOMER SUPPORT




For any questions, technical assistance, or warranty inquiries regarding your Maxxima LED Under Cabinet Light, please visit the official Maxxima website or contact their customer service department. Refer to the product packaging or the Maxxima website for the most current contact information.

You can also visit the [Maxxima Store on Amazon](#) for more information and products.

© 2025 Maxxima. All rights reserved.

Related Documents - MSL-24140W

	<p>Maxxima Under Cabinet Light Installation Instructions</p> <p>Step-by-step installation guide for Maxxima under cabinet lights, including safety warnings, cautions, and warranty information.</p>

	<p><u>Maxxima Linkable Under Cabinet Lights Installation Guide (MSL-12700WL, MSL-18100WL, MSL-24140WL)</u></p> <p>Comprehensive installation guide for Maxxima's linkable under cabinet lights, including models MSL-12700WL, MSL-18100WL, and MSL-24140WL. Learn how to safely install and link your under cabinet lighting.</p>
	<p><u>Maxxima Ceiling Light Installation Guide MCL-3142300B/MCL-3142300SN</u></p> <p>A comprehensive installation guide for the Maxxima Ceiling Light, model numbers MCL-3142300B and MCL-3142300SN. This guide provides step-by-step instructions for wiring and mounting the fixture, along with important safety warnings and cautions. It also details the 3-year limited warranty offered by Maxxima.</p>
	<p><u>Maxxima MRL-62200 & MRL-83000 Commercial Downlight Installation Guide</u></p> <p>Comprehensive installation guide for Maxxima MRL-62200 and MRL-83000 series commercial LED downlights, covering retrofit and new construction installations, housing compatibility, and warranty information.</p>
	<p><u>Maxxima MRL-S20803S/SB 2" Square Anti-Glare LED Downlight Installation Guide</u></p> <p>Installation guide for Maxxima MRL-S20803S and MRL-S20803SB 2-inch square anti-glare LED downlights. Features include Canless IC rating, 450 lumens, and 3 CCT options (2700K-4000K). Includes safety warnings, parts list, and step-by-step installation procedures.</p>