Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Generep AF-100 (Replacement Spool Kit)

Generep Replacement Spool and Cap Kit for Black+Decker AF-100 String Trimmers User Manual

Introduction

This manual provides essential information for the installation, operation, and maintenance of your Generep Replacement Spool and Cap Kit, designed for Black+Decker AF-100 series string trimmers. Please read these instructions carefully before use to ensure proper function and longevity of your product.

Product Overview

The Generep Replacement Spool and Cap Kit is engineered to provide a seamless replacement solution for your Black+Decker string trimmer. The kit includes:

- 8 x Replacement Trimmer Line Spools
- 2 x Replacement Caps
- 2 x Replacement Spool Springs

Each spool comes pre-wound with 30 feet of 0.065-inch diameter trimmer line, made from durable nylon polyamide for effective cutting of grass and weeds.



Figure 1: Components of the Generep Replacement Spool and Cap Kit.



Figure 2: Detailed view of the trimmer line spool with specifications.

Compatibility

This replacement kit is compatible with a wide range of Black+Decker string trimmer models, including but not limited to:

- **GH Series:** GH400, GH500, GH600, GH610, GH900, GH912
- **BESTA Series:** BESTA510, BESTA512, BESTE620
- **LST Series:** LST120, LST136, LST140, LST201, LST220, LST300, LST400, LST420, LST522, LST1018, LSTE523, LSTE525
- **ST Series:** ST6600, ST7000, ST7200, ST7700, ST7701, ST8600, ST9000
- **NST Series:** NST1018, NST1024, NST1118, NST1810, NST2018, NST2118
- **CST Series:** CST1000, CST1100, CST1200, CST2000
- **MTC Series:** MTC220, MTE912

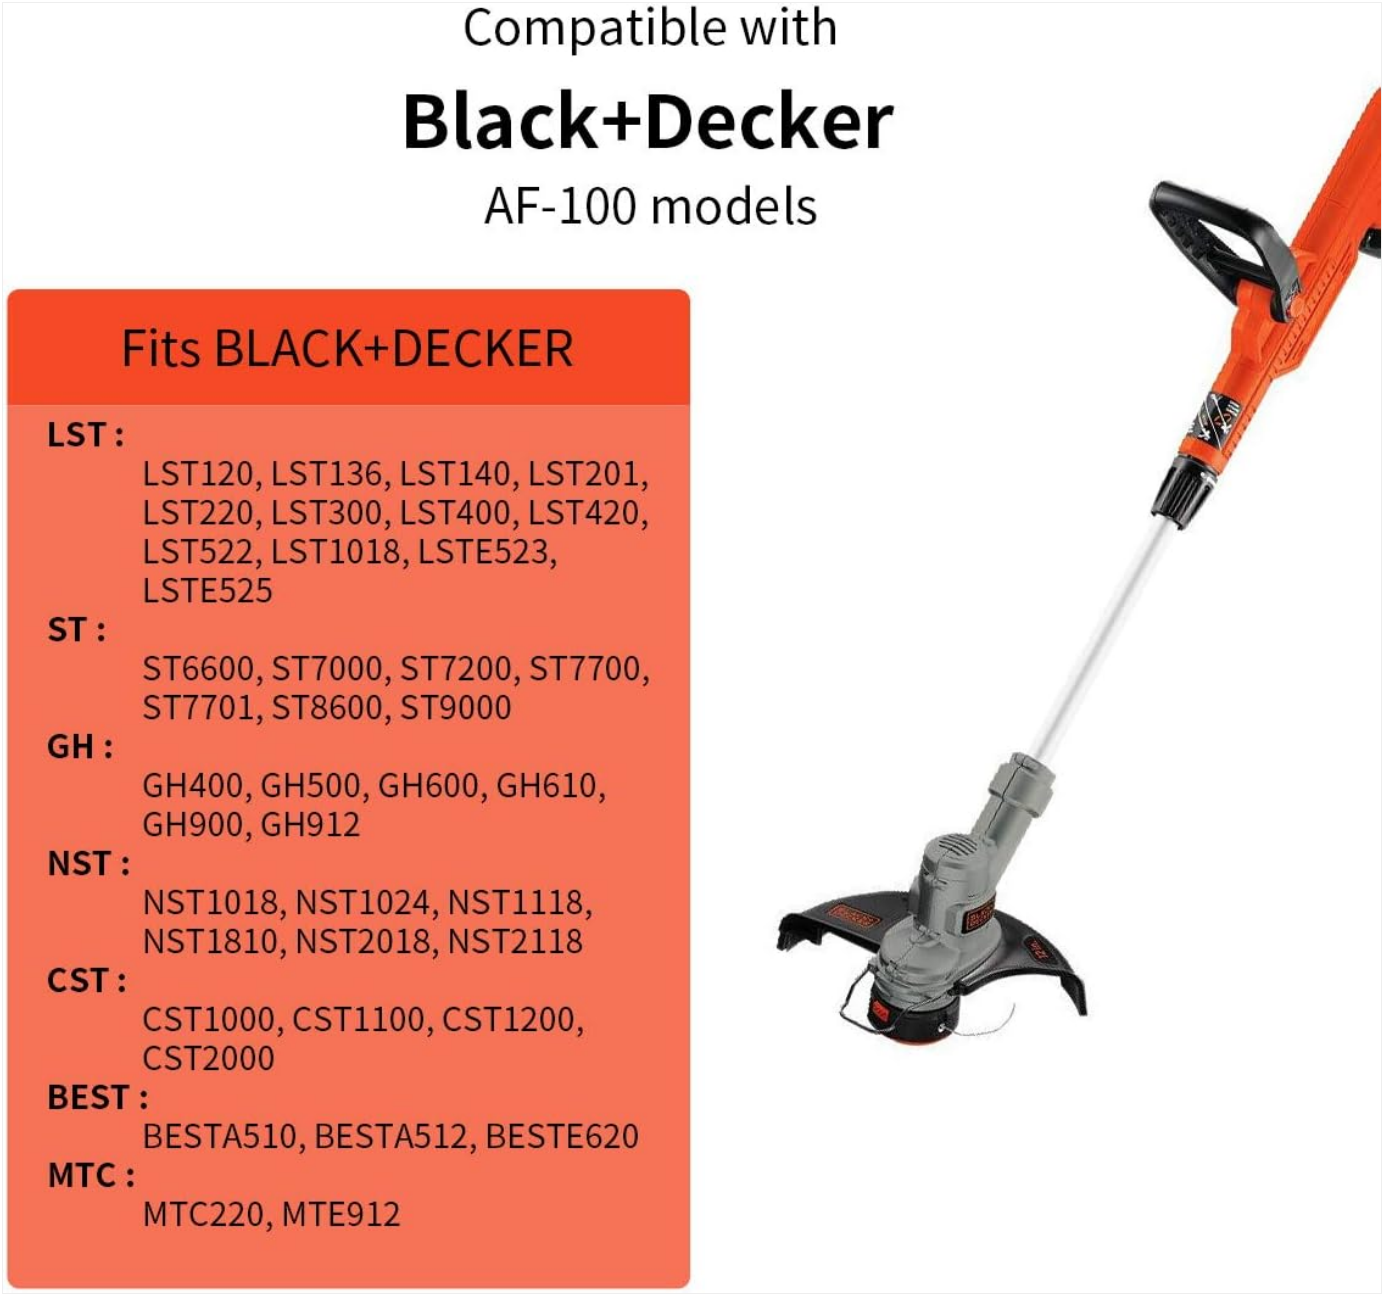


Figure 3: List of compatible Black+Decker trimmer models.

Installation

Follow these steps to replace the trimmer line spool in your Black+Decker string trimmer:

1. **Turn off the Trimmer:** Ensure the string trimmer is powered off and unplugged (or battery removed) for safety.
2. **Remove the Old Cap:** Locate the tabs on the side of the trimmer head. Press these tabs to release and remove the old cap.
3. **Remove the Old Spool and Spring:** Carefully remove the old spool and the spring from the trimmer head.
4. **Insert New Spool:** Take a new replacement spool. Thread the trimmer line through the small hole on the trimmer head. Ensure the spool is oriented correctly (usually with the side indicating 'this side up' facing outwards).
5. **Place New Spring:** If replacing the spring, place the new spring into the cap, ensuring the smaller end of the spring fits into the designated slot on the cap.
6. **Attach New Cap:** Align the new cap with the trimmer head, ensuring the line is properly threaded and the cap tabs snap securely into place. Pull the line gently to ensure it feeds correctly.



Figure 4: Visual guide for spool replacement.

Your browser does not support the video tag.

Video 1: Official guide on how to replace the Weed Eater Spool compatible with Black+Decker AF-100.

Operation

The replacement spools are designed to work seamlessly with your trimmer's auto-feed system. Once installed, the trimmer will automatically feed the line as needed during operation, eliminating the tedious work of manual winding. Ensure the trimmer line extends adequately before starting. If the line does not feed, lightly tap the trimmer head on a hard surface while the trimmer is running to activate the auto-feed mechanism. Always wear appropriate safety gear, including eye protection, when operating the string trimmer.



Figure 5: String trimmer in use with the replacement spool.

Maintenance

To ensure optimal performance and extend the life of your trimmer line and components:

- **Regular Cleaning:** After each use, clean any grass clippings or debris from the trimmer head and guard.
- **Inspect Components:** Periodically check the spool, cap, and spring for signs of wear or damage. Replace components as needed to maintain efficient operation.
- **Proper Storage:** Store unused spools in a cool, dry place away from direct sunlight to prevent the line from becoming brittle.

The trimmer line is made of durable nylon polyamide, designed for resilience and effective cutting.

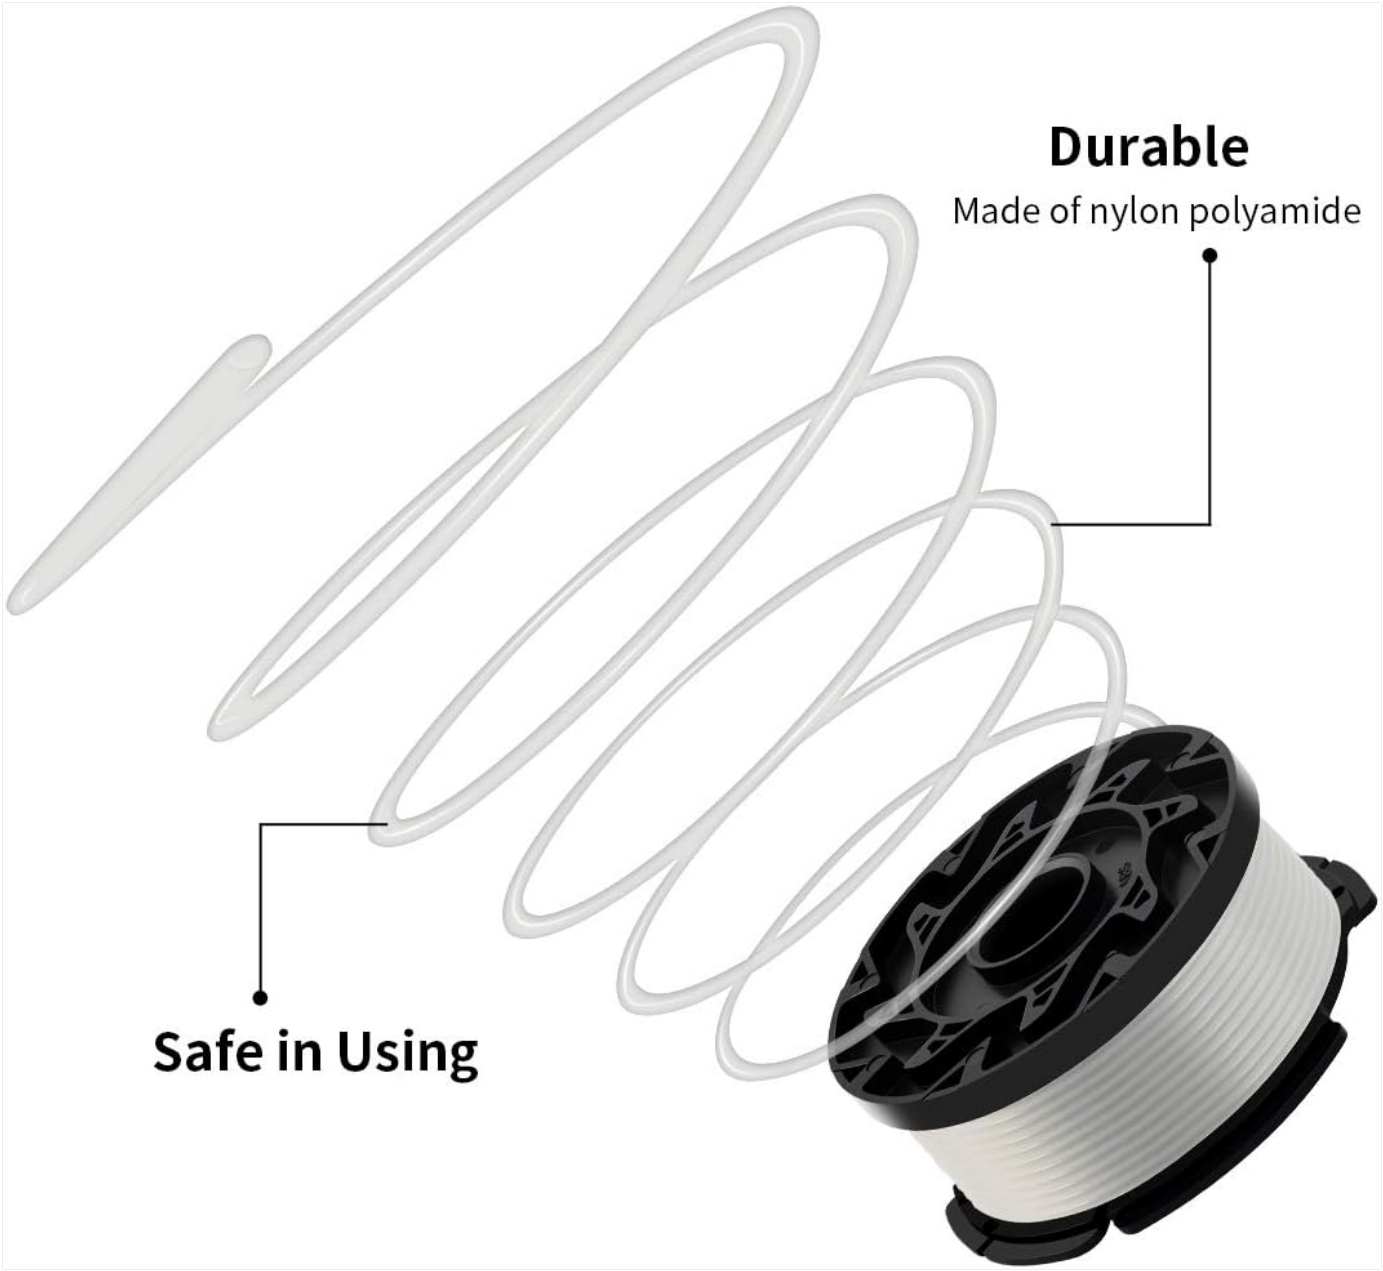


Figure 6: Trimmer line material highlighting durability and safety.

Troubleshooting

Line Not Feeding Automatically

- **Check Spool Installation:** Ensure the spool is correctly seated and the line is properly threaded through the eyelet.
- **Inspect for Obstructions:** Clear any grass, dirt, or debris that might be jamming the auto-feed mechanism or the line exit hole.
- **Tap Head Gently:** While the trimmer is running, lightly tap the trimmer head on a firm, non-abrasive surface to encourage line advancement.
- **Examine Line Condition:** If the line is old or brittle, it may break easily or not feed well. Replace with a fresh spool.
- **Check Spring and Cap:** Ensure the spring is correctly positioned and not damaged, and the cap is securely fastened.

Specifications

Feature	Detail

Item Weight	13.6 ounces
Package Dimensions	11.02 x 6.06 x 1.69 inches
Trimmer Line Diameter	0.065 inches
Trimmer Line Length per Spool	30 feet
Line Material	Nylon Polyamide
Compatible Spool Models	AF-100, AF-100-3ZP, AF-100-BKP, AF-100-2

Warranty and Support

This product comes with a**1-year warranty**. For any questions, concerns, or support needs regarding your Generep Replacement Spool and Cap Kit, please feel free to contact us. We are committed to providing hassle-free assistance.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B07W1HVRRV

More documents and user manuals: **https://manuals.plus/**