



Manuals.plus /

- › KCO /
- › KCO Lighting W1032-C Vanity Wall Sconce Instruction Manual

## KCO W1032-C

# KCO Lighting W1032-C Vanity Wall Sconce Instruction Manual

Model: W1032-C | Brand: KCO

## 1. INTRODUCTION

---

Thank you for choosing the KCO Lighting W1032-C Vanity Wall Sconce. This modern wall light features a brushed brass finish and a clear bubble glass globe, designed to provide a balanced lighting source for various indoor settings. This manual provides essential information for safe installation, operation, and maintenance of your new lighting fixture.

## 2. SAFETY INFORMATION

---

**WARNING: RISK OF ELECTRIC SHOCK. Disconnect power at the fuse box or circuit breaker before installation or servicing.**

- Read all instructions carefully before beginning installation.
- All electrical connections must be in accordance with local codes, ordinances, or national electrical code (NEC).
- Consult a qualified electrician if you are unsure about wiring or installation procedures.
- Do not install this fixture in wet locations. For indoor use only.
- Ensure the fixture is securely mounted to a structural element of the building.
- Use only the specified bulb type and wattage (E26, max 60 watts).
- Do not touch the bulb directly with bare hands; use a clean cloth or gloves.

## 3. PACKAGE CONTENTS

---

Verify that all components are present before beginning installation:

- Wall Sconce Fixture (Brushed Brass with Clear Bubble Glass Globe)

- Mounting Hardware Kit (includes mounting plate, screws, wire nuts)
- Installation Manual
- *Note: E26 bulb is not included.*

## 4. SPECIFICATIONS

Feature	Detail
Brand	KCO
Model Number	W1032-C
Color	Gold + Clear
Material	Glass, Metal
Style	Modern
Light Fixture Form	Sconce
Room Type	Living room, dining room, bedroom, bathroom, kitchen, hallway, coffee shop, stairway, corridor
Power Source	Corded Electric
Light Source	LED (Bulb not included)
Number of Light Sources	1
Voltage	100-220 Volts (Worldwide compatible)
Wattage	Max 60 watts
Bulb Base	E26
Mounting Type	Wall Mount
Installation Type	Hardwired (Flush Mount)
Required Assembly	Yes
Item Dimensions (L x W x H)	8.2" x 5.9" x 23.2" (21cm x 15cm x 59cm)
Globe Diameter	5.9" (15cm)
Canopy Diameter	4.7" (12cm)
Item Weight	2.1 Pounds

## 5. SETUP AND INSTALLATION

This wall sconce is designed for hardwired installation. Please follow these steps carefully. It is recommended to have a qualified electrician perform the installation.

### 1. Prepare for Installation:

- Turn off power at the circuit breaker or fuse box to avoid electrical shock.
- Ensure the mounting surface is clean, dry, and structurally sound.
- Unpack all components and verify against the package contents list.

## 2. Assemble the Fixture (Pre-installation):

- Unscrew the fixing screws from the lamp holder.
- Carefully install the E26 bulb (not included) into the lamp holder.
- Place the clear glass lampshade over the bulb and secure it by screwing the fixing screws back into place.
- Attach any extension poles if necessary, ensuring they are securely tightened.
- Install the chassis (mounting plate) to the fixture, ensuring the wires are correctly routed.

Your browser does not support the video tag.

Video: Assembly steps for the KCO Lighting Wall Sconce, demonstrating bulb and lampshade installation, and chassis attachment.

## 3. Mounting the Fixture:

- Attach the mounting plate to the junction box in your wall using the provided screws.
- Connect the fixture's wires to the house wires:
  - Connect the black wire (live) from the fixture to the black wire from the junction box.
  - Connect the white wire (neutral) from the fixture to the white wire from the junction box.
  - Connect the green or bare copper wire (ground) from the fixture to the ground wire from the junction box.
  - Secure all connections with wire nuts and electrical tape.
- Carefully tuck all wires into the junction box.
- Align the fixture's canopy with the mounting plate and secure it with the decorative nuts or screws.

## 4. Final Check:

- Ensure all connections are tight and secure.
- Restore power at the circuit breaker or fuse box.
- Test the light fixture.

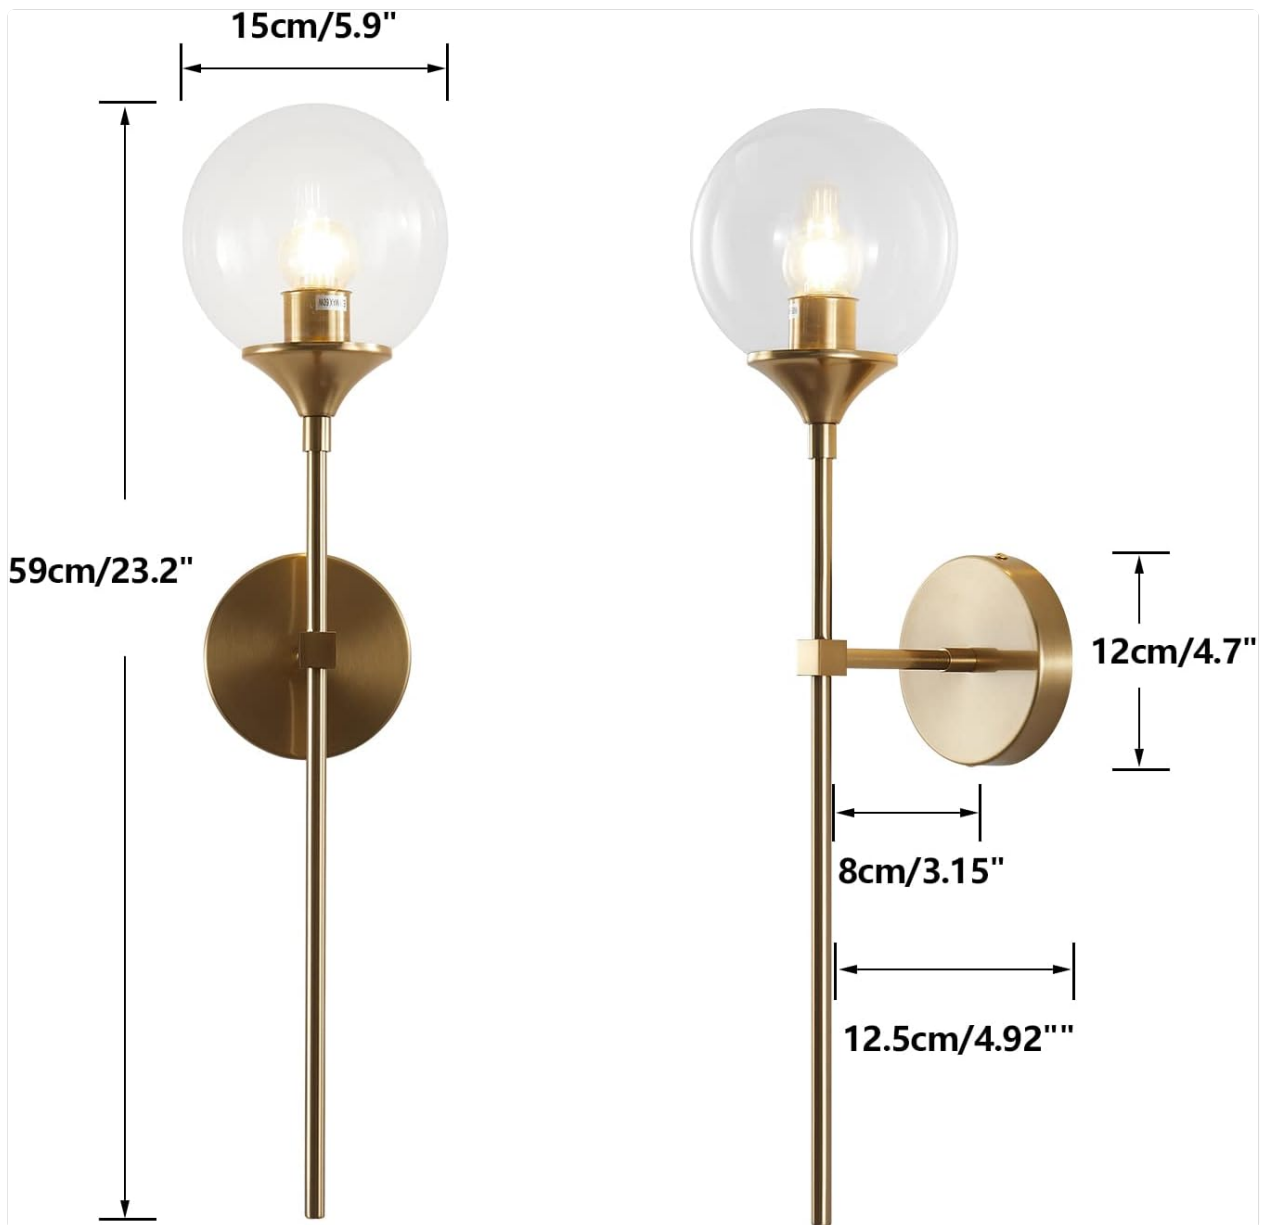


Image: Detailed view of the sconce components, highlighting the E26 socket, clear glass lampshade, iron canopy, and gold textured lamp body.

Image: Dimensions of the KCO Lighting Vanity Wall Sconce, including overall height, width, globe diameter, and canopy diameter.

## 6. OPERATING INSTRUCTIONS

Once properly installed and powered, the KCO Lighting W1032-C Vanity Wall Sconce operates via a standard wall switch (not included). Ensure the bulb is correctly installed before turning on the power.

- To turn the light ON, flip the connected wall switch to the 'ON' position.
- To turn the light OFF, flip the connected wall switch to the 'OFF' position.

Image: The E26 bulb base and the sconce in both off and illuminated states.

## 7. MAINTENANCE

Regular maintenance will help preserve the appearance and functionality of your wall sconce.

- **Cleaning:** Always disconnect power before cleaning. Use a soft, dry cloth to wipe the metal and glass surfaces. Avoid abrasive cleaners, solvents, or polishes as they may damage the finish.
- **Bulb Replacement:** Ensure power is off and the bulb has cooled completely before attempting to replace it. Unscrew the glass globe, then carefully unscrew the old E26 bulb and replace it with a new one (max 60 watts). Reattach the glass globe securely.
- **Inspection:** Periodically check for any loose connections or signs of wear. If any issues are found, consult a qualified electrician.

## 8. TROUBLESHOOTING

---

If your KCO Lighting Vanity Wall Sconce is not functioning as expected, refer to the following common issues and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"><li>◦ Power is off at the circuit breaker.</li><li>◦ Bulb is loose or burnt out.</li><li>◦ Wiring connections are loose or incorrect.</li></ul>	<ul style="list-style-type: none"><li>◦ Check the circuit breaker and ensure power is on.</li><li>◦ Tighten or replace the E26 bulb.</li><li>◦ Turn off power, then check and secure all wiring connections. Consult an electrician if needed.</li></ul>
Light flickers.	<ul style="list-style-type: none"><li>◦ Loose bulb.</li><li>◦ Loose wiring connection.</li><li>◦ Incompatible dimmer switch (if applicable).</li></ul>	<ul style="list-style-type: none"><li>◦ Tighten the bulb.</li><li>◦ Turn off power, then check and secure all wiring connections.</li><li>◦ Ensure your dimmer switch is compatible with LED bulbs (if using LED).</li></ul>
Glass globe is loose.	<ul style="list-style-type: none"><li>◦ Fixing screws are not tightened.</li></ul>	<ul style="list-style-type: none"><li>◦ Gently press the globe into the base and ensure the fixing screws are tightened.</li></ul>

## 9. WARRANTY AND SUPPORT

---

KCO Lighting offers a 1-year professional after-sales service for this product. If you receive a broken, damaged, or cracked glass lampshade, a damaged lamp body, or are missing any parts, please communicate with the seller via your order number. We will send you a replacement as soon as possible.

For further assistance or inquiries, please refer to your purchase platform or contact KCO Lighting customer service directly.