

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Noma](#) /

› [NOMA C6 LED Christmas Lights Instruction Manual - 70 Red & Pure White Bulbs](#)

Noma C6 LED Christmas Lights

NOMA C6 LED Christmas Lights Instruction Manual

Model: C6 LED Christmas Lights (70 Red & Pure White Bulbs)

INTRODUCTION

This manual provides instructions for the safe and effective use of your NOMA C6 LED Christmas Lights. These string lights feature 70 diamond-cut faceted LED bulbs in red and pure white, designed for both indoor and outdoor applications. The 23.8-foot strand is UL certified and energy-efficient.



Image: NOMA C6 LED Christmas Lights packaging. The box displays key features such as 70 LED bulbs, 23.8 ft length, and a 3-year limited warranty, indicating the product's specifications and reliability.

SAFETY INFORMATION

Please read and follow all safety instructions to prevent injury or damage. This product is an electrical item and not a toy. Keep out of reach of children. Always unplug the lights when not in use or before performing any maintenance.

- Ensure the product is installed securely to prevent falling.
- Do not connect more than 45 sets of these lights end-to-end. Exceeding this limit can overload the circuit.
- Inspect the string lights for any damage to the wire insulation, bulb sockets, or bulbs before each use. Do not use if damaged.
- Do not mount or place near gas or electric heaters, fireplaces, candles, or other similar sources of heat.
- Do not secure the wiring of the product with staples or nails, or place on sharp hooks or nails.
- Do not close doors or windows on the product or extension cords as this may damage the wire insulation.
- Do not immerse electrical parts in water.
- This product is equipped with a fuse as a safety feature. Do not remove or bypass the fuse.

PACKAGE CONTENTS

Your NOMA C6 LED Christmas Lights package includes:

- 1 x NOMA C6 LED String Light (70 Red & Pure White Bulbs, 23.8 ft)
- 1 x Spare Fuse
- 2 x Spare Bulbs

SETUP AND INSTALLATION

These lights are suitable for both indoor and outdoor use. Ensure the installation surface is clean and dry before mounting.

Connecting Multiple Strands

Each 23.8-foot strand is designed with plug-ins at both ends, allowing for end-to-end connectivity. You can connect up to 45 sets of these lights together for a total of 3,150 lights. Always ensure the total wattage of connected strands does not exceed the maximum recommended load for your power outlet.



Image: NOMA C6 LED Christmas Lights installed on an outdoor railing. The red and pure white bulbs are visible, demonstrating their suitability for outdoor decoration.

Placement Recommendations

- **Indoor:** Ideal for Christmas trees, mantels, railings, and windows.
- **Outdoor:** Suitable for fences, patios, eaves, and entryways. Ensure all connections are secure and protected from direct water exposure.



Image: NOMA C6 LED Christmas Lights wrapped around a porch pillar. This illustrates a common outdoor installation method, enhancing the festive appearance of a home's exterior.

OPERATING INSTRUCTIONS

To operate your NOMA C6 LED Christmas Lights, simply plug the string into a standard electrical outlet. The lights will illuminate. There are no special modes or settings for these lights; they provide a continuous glow.

- Ensure the power outlet is suitable for outdoor use if installing outdoors.
- To turn off the lights, unplug them from the power source.

MAINTENANCE

Regular maintenance ensures the longevity and safe operation of your string lights.

Cleaning

Unplug the lights before cleaning. Wipe bulbs and wires with a soft, dry cloth. Do not use harsh chemicals or abrasive cleaners.

Bulb Replacement

If a bulb burns out, it can be replaced. Unplug the light string. Carefully twist the faulty bulb counter-clockwise to remove it from its socket. Insert a new spare bulb (provided) by twisting it clockwise until secure. Ensure the replacement bulb is of the same type and wattage.



Image: Close-up of NOMA C6 LED bulbs. This detailed view highlights the diamond-cut faceted design of the red and pure white bulbs, which are easily replaceable.

Fuse Replacement

This product is equipped with a fuse for overload protection. If the entire string of lights does not illuminate, the fuse may need replacement. To replace the fuse:

1. Unplug the product from the power source.
2. Open the fuse cover located on the plug.
3. Carefully remove the old fuse.
4. Insert a new spare fuse (provided) of the correct rating.
5. Close the fuse cover securely.

Storage

When storing the product, carefully remove it from wherever it is placed, including trees, branches, or bushes, to avoid any undue strain or stress on the product conductors, connections, and wires. When not in use, store neatly in a cool, dry place, protected from sunlight.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Lights do not turn on.	No power to the outlet.	Check the power outlet with another device. Ensure the plug is fully inserted.
Lights do not turn on.	Blown fuse in the plug.	Replace the fuse as described in the Maintenance section.
Some bulbs are not lit.	Loose or burnt-out bulb.	Check each unlit bulb. Tighten any loose bulbs or replace burnt-out bulbs with spare bulbs.
Lights flicker or dim.	Loose connection or overloaded circuit.	Ensure all connections are secure. Reduce the number of connected strands if exceeding 45 sets.

SPECIFICATIONS

- **Model:** C6 LED Christmas Lights
- **Bulb Type:** LED, C6 Diamond Cut Faceted
- **Number of Bulbs:** 70
- **Bulb Colors:** Red & Pure White
- **String Length:** 23.8 ft (7.2 m)
- **Bulb Spacing:** 4 inches (approx.)
- **Connectivity:** End-to-end, up to 45 sets (3,150 lights total)
- **Usage:** Indoor & Outdoor
- **Certification:** UL Certified
- **Power Source:** Corded Electric
- **Manufacturer:** NOMA
- **ASIN:** B07WT5RQJS

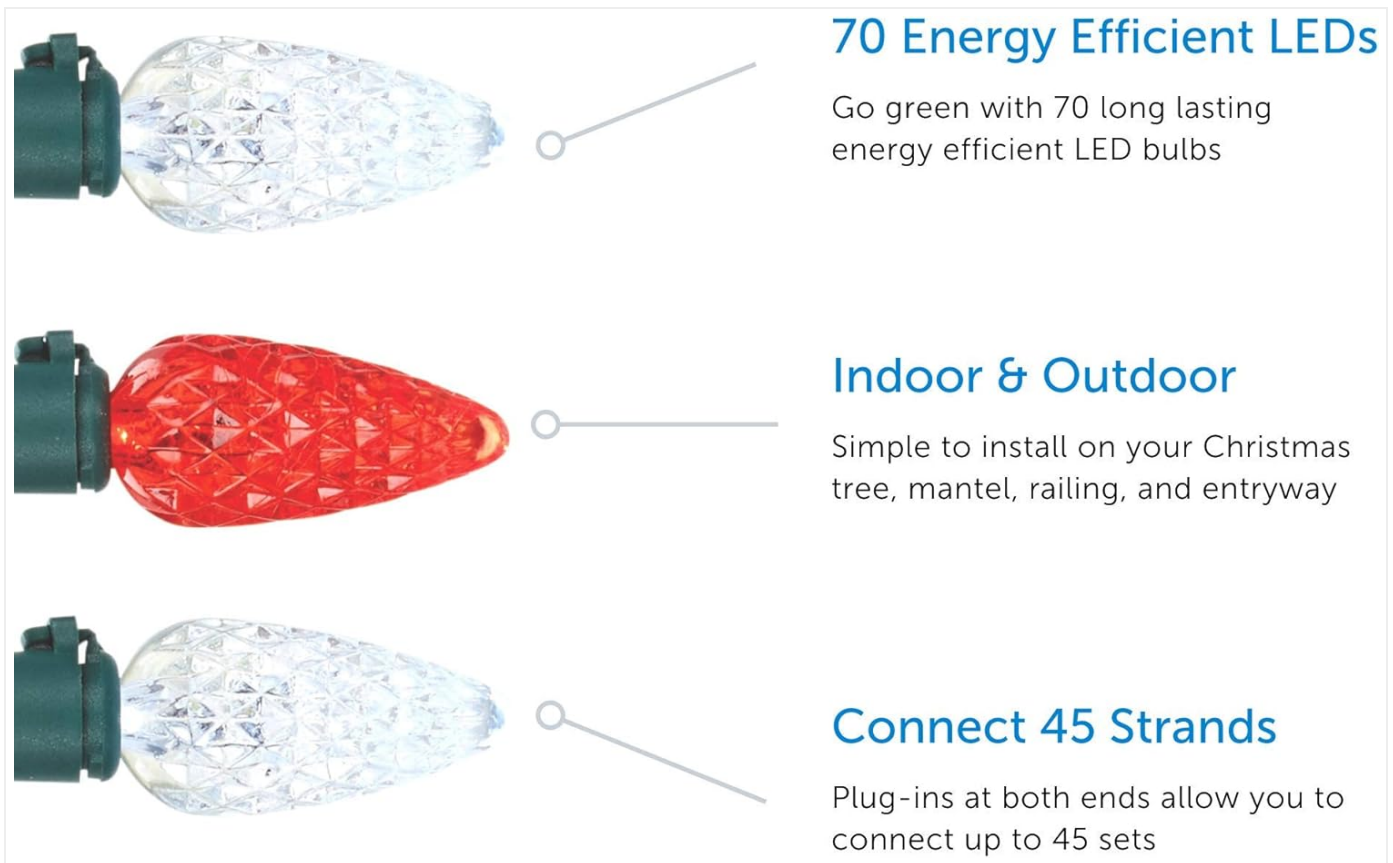


Image: Feature diagram for NOMA C6 LED lights. This graphic highlights the 70 energy-efficient LEDs, indoor/outdoor suitability, and the capability to connect up to 45 strands, summarizing key product specifications.

WARRANTY AND SUPPORT

Your NOMA C6 LED Christmas Lights are covered by a **3-year limited warranty**. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

For support or warranty inquiries, please contact NOMA customer service. Refer to the product packaging or the NOMA official website for current contact information.

