

Naim NAIM-UNITI-NOVA

Naim Uniti Nova Audiophile All-in-One Player User Manual

Model: NAIM-UNITI-NOVA

INTRODUCTION

The Naim Uniti Nova is a high-performance audiophile all-in-one player designed to deliver exceptional sound quality from various sources. This manual provides essential information for setting up, operating, and maintaining your Uniti Nova to ensure optimal performance and longevity.

SETUP

1. Unpacking and Placement

Carefully remove the Uniti Nova from its packaging. Ensure the unit is placed on a stable, level surface away from direct sunlight, heat sources, and excessive moisture. Allow adequate ventilation around the unit.

2. Connecting Power

Connect the supplied power cable to the AC inlet on the rear panel of the Uniti Nova and then to a suitable mains power outlet. Ensure the power switch is in the OFF position before connecting.

3. Audio Connections

The Uniti Nova offers a variety of audio input and output options:

- **Speaker Outputs:** Connect your loudspeakers to the dedicated speaker terminals on the rear panel. Ensure correct polarity (red to red, black to black). The Uniti Nova provides 80 watts per channel of Class A/B amplification.
- **Analogue Inputs:** Use RCA or DIN cables to connect external analogue sources such as a turntable (with a phono stage) or a CD player.
- **Digital Inputs:** Optical (TOSLINK), Coaxial (RCA), and BNC inputs are available for digital sources like TVs, game consoles, or digital audio transports.
- **HDMI ARC:** Connect to your television's HDMI ARC port for high-quality audio playback from your TV.

- **Headphone Output:** A 3.5mm headphone jack is located on the front panel for private listening.

4. Network Connection

For streaming services and firmware updates, connect the Uniti Nova to your home network. You can use either a wired Ethernet connection via the RJ45 port or a wireless Wi-Fi connection (supports 2.4 and 5 GHz b/g/n/ac).



Image: Front view of the Naim Uniti Nova Audiophile All-in-One Player, showcasing its display and controls.



Image: Rear panel of the Naim Uniti Nova, detailing the comprehensive array of input and output connections including speaker terminals, analogue, digital, and network ports.

OPERATING

1. Power On/Off

After all connections are made, switch the main power switch on the rear panel to the ON position. The unit will enter standby mode. Press the power button on the front panel or remote control to fully power on the Uniti Nova.

2. Front Panel Controls and Display

The front panel features a high-resolution display for navigating menus, viewing album art, and displaying track information. Control buttons allow for basic playback functions, input selection, and volume adjustment.

3. Naim App Control

For the most comprehensive control, download the Naim app for your iOS or Android device. The app allows you to browse music libraries, control streaming services, adjust settings, and manage multi-room audio.

4. Source Selection and Playback

Use the front panel controls, remote, or Naim app to select your desired audio source (e.g., streaming service, local network storage, digital input, analogue input). Once a source is selected, use the playback controls to start, pause, skip tracks, and adjust volume.

Image: The Naim Uniti Nova being controlled wirelessly via a tablet application, alongside its dedicated remote control.



Image: The Naim Uniti Nova positioned on a side table, demonstrating its compact form factor suitable for various living spaces, with headphones nearby.

MAINTENANCE

1. Cleaning

To clean the Uniti Nova, use a soft, dry, lint-free cloth. Avoid using abrasive cleaners, solvents, or sprays directly on the unit. For the display, use a screen-specific cleaning solution if necessary, applied to the cloth, not directly to the screen.

2. Firmware Updates

Naim regularly releases firmware updates to improve performance and add new features. Ensure your Uniti Nova is connected to the internet and check for updates via the Naim app or the unit's system settings menu. Follow the on-screen instructions carefully during the update process.

TROUBLESHOOTING

No Power

- Check that the power cable is securely connected to both the Uniti Nova and the mains outlet.
- Ensure the main power switch on the rear panel is in the ON position.
- Verify the mains outlet is functional by plugging in another device.

No Sound

- Confirm the correct input source is selected.
- Check speaker connections for correct polarity and secure fit.
- Ensure the volume is not set to minimum or muted.
- If using digital inputs, verify the source device is outputting audio correctly.

Network Connection Issues

- For wired connections, ensure the Ethernet cable is securely connected to both the Uniti Nova and your router.

- For Wi-Fi, check that the correct network is selected and the password is entered accurately.
- Restart your router and the Uniti Nova.
- Ensure the Uniti Nova is within range of your Wi-Fi router.

App Control Problems

- Ensure your mobile device is connected to the same network as the Uniti Nova.
- Restart the Naim app.
- Restart your mobile device.

SPECIFICATIONS

- **Model Name:** Naim Uniti Nova All-in-One Audiophile
- **Item Model Number:** NAIM-UNITI-NOVA
- **Material:** Metal
- **Speaker Maximum Output Power:** 80 Watts per channel
- **Connectivity Technology:** Wi-Fi (2.4 & 5 GHz b/g/n/ac), Ethernet, Bluetooth
- **Control Method:** App, Remote, Front Panel
- **Product Dimensions:** 10.43 x 17 x 3.74 inches
- **Item Weight:** 28.7 pounds
- **Special Feature:** Hi-Res Audio support, State-of-the-art Naim NP800 streaming audio module
- **Internal Design:** 3 Tier PCB arrangement for shortest analogue signal path, Six layer impedance controlled digital PCB, Massive custom toroidal transformer with six separate windings.

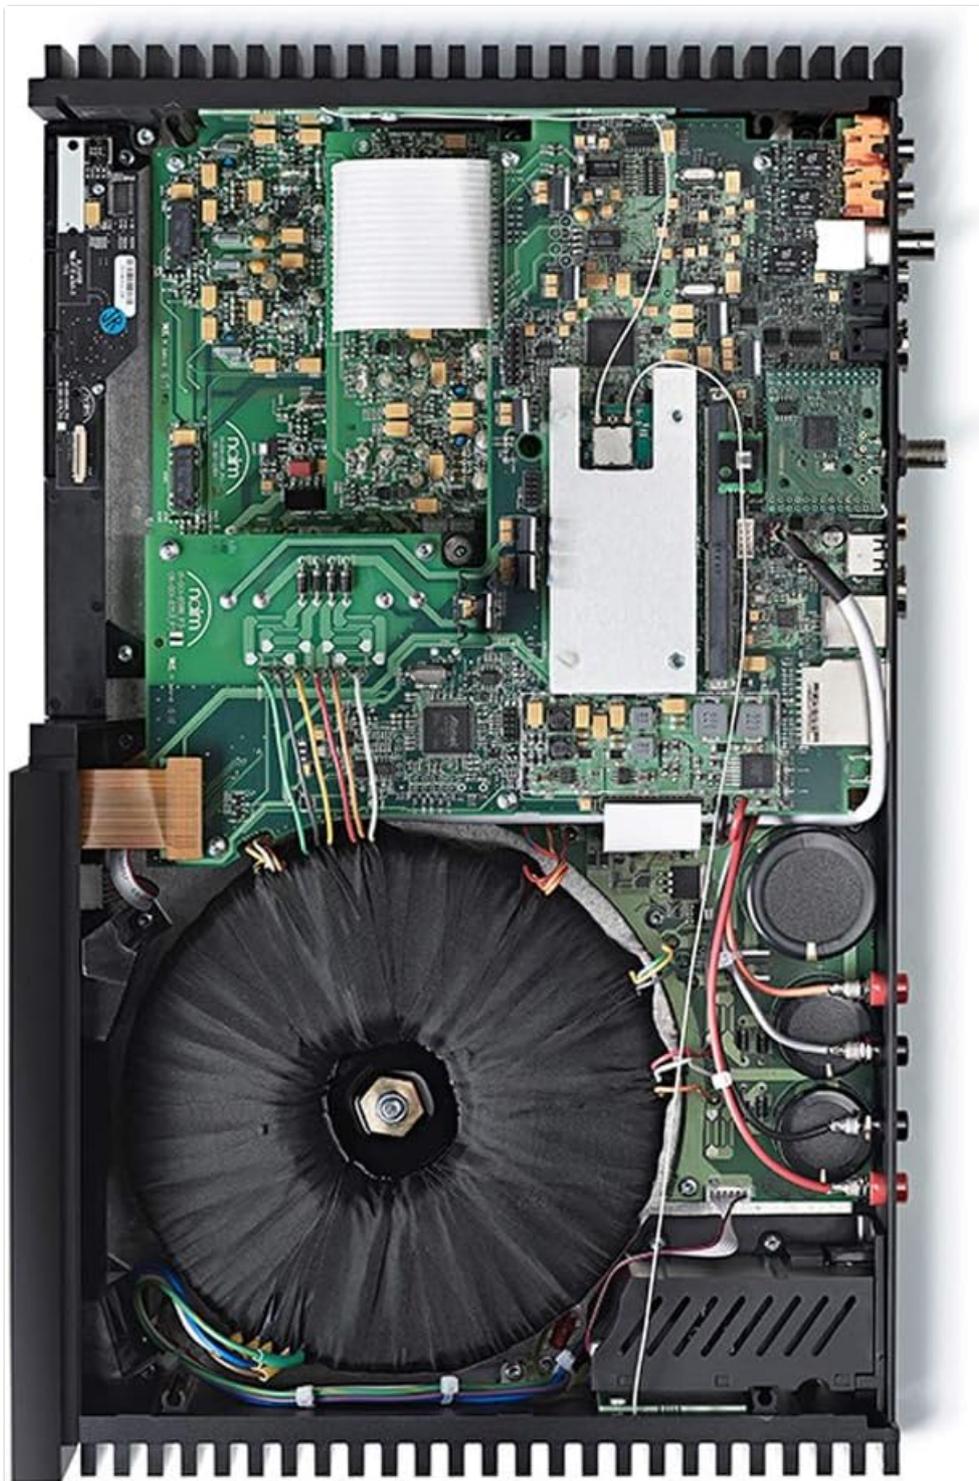


Image: Internal view of the Naim Uniti Nova, highlighting the sophisticated circuit board layout and the large toroidal transformer, key components for its audiophile performance.

WARRANTY AND SUPPORT

Warranty Information

The Naim Uniti Nova comes with a full warranty. Please refer to the warranty card included with your product for specific terms, conditions, and duration. Retain your proof of purchase for warranty claims.

Customer Support

For technical assistance, service, or further information, please visit the official Naim website or contact your authorized Naim dealer. Online resources, FAQs, and support contact details are typically available on the

manufacturer's website.