

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Portfolio](#) /

› [Portfolio Bronze Single Transitional Pendant Light User Manual](#)

Portfolio Single Transitional Pendant Light

Portfolio Single Transitional Pendant Light

MODEL: SINGLE TRANSITIONAL PENDANT LIGHT

1. Introduction

This manual provides essential instructions for the safe installation, operation, and maintenance of your Portfolio Single Transitional Pendant Light. Please read all instructions carefully before beginning installation and retain this manual for future reference. This pendant light is designed to accommodate a glass pendant shade (not included) to complement your interior decor.

2. Safety Information

- **WARNING:** Risk of electric shock. Disconnect power at the circuit breaker or fuse box before installation or servicing.
- All electrical connections must be in accordance with local codes, ordinances, or the National Electric Code (NEC). Consult a qualified electrician if you are unfamiliar with proper electrical wiring connections.
- Wear safety glasses and appropriate protective gear during installation.
- Ensure the mounting surface can support the weight of the fixture.
- Do not exceed the maximum wattage specified for the light bulb.
- This fixture is intended for indoor use only.

3. Package Contents

Verify that all components are present before beginning installation.

- Pendant Light Fixture (Bronze finish)
- Mounting Hardware Kit
- Instruction Manual

Note: A glass pendant shade and light bulb are not included and must be purchased separately.



Image 1: The Portfolio Single Transitional Pendant Light fixture in bronze, shown without a glass shade. This image displays the ceiling canopy, downrod, and bulb socket assembly.

4. Tools Required (Not Included)

- Phillips Head Screwdriver
- Flathead Screwdriver
- Wire Strippers
- Electrical Tape
- Safety Glasses
- Ladder

5. Setup and Installation

Follow these steps carefully for proper installation. If you are unsure about any step, consult a qualified electrician.

1. **Turn Off Power:** Locate the circuit breaker or fuse box that controls the power to the light fixture location. Turn off the power completely. Verify power is off using a voltage tester.
2. **Prepare Wiring:** If replacing an existing fixture, carefully remove it. Ensure the electrical box is securely mounted and capable of supporting the new pendant light.
3. **Attach Mounting Bracket:** Secure the mounting bracket (from the hardware kit) to the electrical box using the provided screws.
4. **Adjust Cord Length:** Determine the desired hanging height for your pendant light. Adjust the cord length by pushing the cord through the canopy until the desired length is achieved. Secure the cord.
5. **Make Electrical Connections:** Connect the fixture's wires to the house wires:
 - Connect the **black** (hot) wire from the fixture to the **black** (hot) wire from the electrical box.

- Connect the **white** (neutral) wire from the fixture to the**white** (neutral) wire from the electrical box.
- Connect the **ground** wire (bare copper or green) from the fixture to the**ground** wire from the electrical box and to the mounting bracket.

Secure all connections with wire nuts and wrap with electrical tape for added safety.

6. **Mount Fixture:** Carefully push the wired connections into the electrical box. Align the canopy of the pendant light with the mounting bracket and secure it with the provided screws.
7. **Install Shade and Bulb:** Attach your chosen glass pendant shade (if applicable) according to its specific instructions. Install an incandescent bulb (max 60 watts) into the socket.
8. **Restore Power:** Turn the power back on at the circuit breaker or fuse box. Test the light fixture.



Image 2: The Portfolio Single Transitional Pendant Light installed in a room, featuring a clear glass shade (not included with the fixture) and illuminating a wall.

6. Operating Instructions

The Portfolio Single Transitional Pendant Light operates via a standard wall switch connected to the electrical circuit. Simply toggle the wall switch to turn the light fixture on or off.

Bulb Replacement:

1. Turn off power to the fixture at the circuit breaker.
2. Allow the bulb to cool completely if it has been recently used.
3. Carefully unscrew the old bulb.
4. Screw in a new incandescent bulb (max 60 watts).
5. Restore power and test the light.

7. Maintenance

To maintain the appearance and functionality of your pendant light:

- **Cleaning:** Disconnect power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.
- **Bulb Type:** Use only incandescent bulbs with a maximum wattage of 60 watts.

- **Regular Inspection:** Periodically check all connections and mounting hardware to ensure they remain secure.

8. Troubleshooting

Problem	Possible Cause	Solution
Light does not turn on	1. Power is off 2. Loose wire connections 3. Faulty bulb 4. Faulty wall switch	1. Check circuit breaker/fuse 2. Verify all wire connections are secure (with power off) 3. Replace bulb 4. Consult a qualified electrician
Light flickers	1. Loose bulb 2. Loose wire connections 3. Incorrect bulb type/wattage	1. Tighten bulb 2. Verify all wire connections are secure (with power off) 3. Ensure correct bulb type and wattage (max 60W incandescent)



9. Specifications

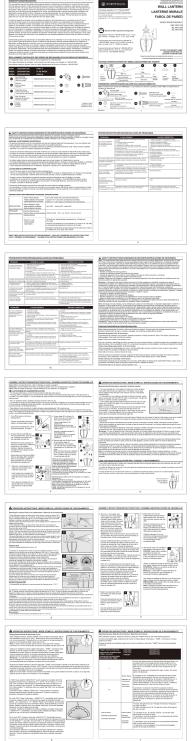
- **Brand:** Portfolio
- **Model:** Single Transitional Pendant Light
- **Color:** Bronze
- **Material:** Bronze, Glass (fixture is bronze, designed for glass shade)
- **Light Fixture Form:** Pendant
- **Power Source:** Corded Electric
- **Voltage:** 110 Volts
- **Wattage:** Max 60 watts
- **Light Source Type:** Incandescent
- **Number of Light Sources:** 1
- **Mounting Type:** Pendant Light
- **Item Weight:** 1.24 pounds
- **Package Dimensions:** 7.36 x 5.94 x 2.91 inches
- **UPC:** 080629709522
- **ASIN:** B07Y5MXSWQ

10. Warranty and Support

For warranty information or technical support, please refer to the retailer where the product was purchased or visit the official Portfolio brand website. Keep your proof of purchase for any warranty claims.

Related Documents - Single Transitional Pendant Light

	<p>Portfolio 200-Watt Power Pack Installation and Operation Manual</p> <p>This manual provides instructions for the installation, operation, and troubleshooting of the Portfolio 200-Watt Power Pack. It includes safety information, package contents, assembly steps, operating instructions, and a parts list.</p>
	<p>PORTFOLIO WALL LANTERN Model FS130125-29 Installation and Care Guide</p> <p>Official installation, care, troubleshooting, and warranty information for the PORTFOLIO WALL LANTERN, Model FS130125-29. Includes parts list and assembly instructions.</p>
	<p>Portfolio 60-Watt Power Pack Installation and Operation Guide</p> <p>Comprehensive guide for the Portfolio 60-Watt Power Pack (Model #8201080378), covering package contents, safety instructions, assembly, wiring, operation, and troubleshooting for landscape lighting systems.</p>
	<p>Portfolio Post Lantern Installation Manual Models FS130125-9, FS130125-11</p> <p>Comprehensive installation, assembly, care, and troubleshooting guide for Portfolio Post Lantern models FS130125-9 and FS130125-11. Includes safety information, parts lists, and warranty details.</p>
	<p>Portfolio HSA Slope Adapters Rough-In Installation Instructions</p> <p>Comprehensive installation guide for Portfolio HSA and HSAC slope adapters, detailing the rough-in section, fixture mounting, and trim attachment for sloped ceilings. Includes model numbers and dimensions.</p>



[PORTFOLIO JEL1691A Wall Lantern Installation and Operation Manual](#)

This manual provides detailed instructions for the installation, operation, and troubleshooting of the PORTFOLIO JEL1691A Wall Lantern. It includes safety guidelines, specifications, and warranty information.