

## Divoom Ditoo

# Divoom Ditoo Retro Pixel Art Game Bluetooth Speaker User Manual

MODEL: DITOO

Brand: Divoom

## 1. Introduction and Overview

The Divoom Ditoo is a versatile retro-styled pixel art Bluetooth speaker designed to enhance your desk or living space with both audio and visual appeal. It features a 16x16 LED front screen for customizable pixel art, mechanical keyswitches, and a range of smart functions controlled via a dedicated mobile application. This manual provides detailed instructions for setup, operation, and maintenance of your Divoom Ditoo speaker.



*The Divoom Ditoo speaker, featuring its distinctive pixel art display and mechanical keyboard.*

## 2. What's in the Box

Upon unboxing your Divoom Ditoo, please ensure all the following components are present:

- 1 x Divoom Ditoo Speaker
- 1 x Type-C Charging Cable
- 1 x Set of Stickers
- 1 x Poster
- 1 x User Manual (this document)



*All items included in the Divoom Ditoo product packaging.*

### 3. Product Features

- **Pixel Art Customization:** The 16x16 LED screen allows for extensive customization. Users can create their own pixel art designs, display pre-set images, or download creations from a global community via the Divoom app.
- **High-Fidelity Audio:** Equipped with a 15W speaker and a bass reflex port, the Ditoo delivers clear sound with robust bass and crisp highs.
- **Mechanical Keyboard & Joystick:** Features backlit mechanical keyswitches and a functional joystick, adding to its retro aesthetic and interactive experience.
- **Versatile Functions:** Beyond a speaker, the Ditoo functions as a smart alarm clock, time planner, notification display, voice memo recorder, and offers various lighting effects and mini-games.
- **Long Battery Life:** A 5000mAh battery provides up to 8 hours of playback on a single charge.

# Intense Powerful Sound



**Super Bass**



**360° Surround  
Sound**



**10H Playback  
Time**

*Experience intense and powerful sound.*

# More Choice, More Fun



Online Radio



Notification



Alarm



Voice Memo



Sleep Aid



Time Planner



Light



More



*Explore a wide range of functions for more fun.*

## 4. Setup

1. **Charging the Device:** Connect the supplied Type-C charging cable to the USB Type-C charging port (13) on the back of the Ditoo and plug the other end into a compatible USB power adapter. The battery indicator (9) will show charging status. A full charge takes approximately 4 hours.
2. **Power On/Off:** Press and hold the ON/OFF button (14) located on the back of the device to power the speaker on or off.
3. **Bluetooth Pairing:**
  - Ensure the Ditoo is powered on.
  - On your smartphone or tablet, navigate to Bluetooth settings.
  - Select 'Ditoo' from the list of available devices to pair.
  - A confirmation sound will indicate successful pairing.
4. **App Download:** For full functionality and customization, download the Divoom app. Scan the QR code on the product packaging or visit <http://www.divoom.com/AppDownload>. The app is compatible with iOS and Android devices.



*Scan the QR code to download the Divoom app.*

## 5. Operating Instructions

---

The Divoom Ditoo features intuitive controls for various functions:



*Detailed view of Divoom Ditoo controls and ports.*


- (1) **"m" button:** Press to enter/exit the menu system.
- (2) **"+" button:** Press to increase volume. Hold to increase brightness.
- (3) **"Lighting" button:** Press to change light function. Hold to change light effects.
- (4) **"+" button:** Press for previous song. Hold for last light effect.
- (5) **"-" button:** Press to decrease volume. Hold to lower brightness.
- (6) **"-" button:** Press for next song. Hold for next light effect.
- (7) **Lever:** Short pull to Play/Pause. Long pull to start voice memo recording.
- (8) **Audio source button:** Short pull to switch between different audio sources. Double press to disconnect Bluetooth connection.
- (9) **Battery indicator:** Press any button to check the battery status.
- (10) **Bass port:** For enhanced audio output.
- (11) **Rear port flap:** Protects the ports.
- (12) **Reset pin hole:** Use a thin object to reset the device if needed.
- (13) **USB Type-C charging port:** For charging the device.
- (14) **ON/OFF button:** Hold to power on/off the speaker.
- (15) **TF card slot:** For playback of music from a TF (microSD) card.

#### App Integration and Features:

The Divoom app unlocks the full potential of your Ditoo speaker:


- **Pixel Art Creation:** Design and animate your own pixel art.

- **Clock Gallery:** Choose from various clock faces.
- **Online Gallery:** Browse and download pixel art from a global community.
- **Countdown & Planner:** Utilize productivity tools.
- **White Noise:** Access 24 soothing sounds for sleep or relaxation.
- **Alarm Clock:** Set alarms with 12 different wake-up sounds.
- **Music Visualizer:** Display dynamic pixel art animations that react to your music.

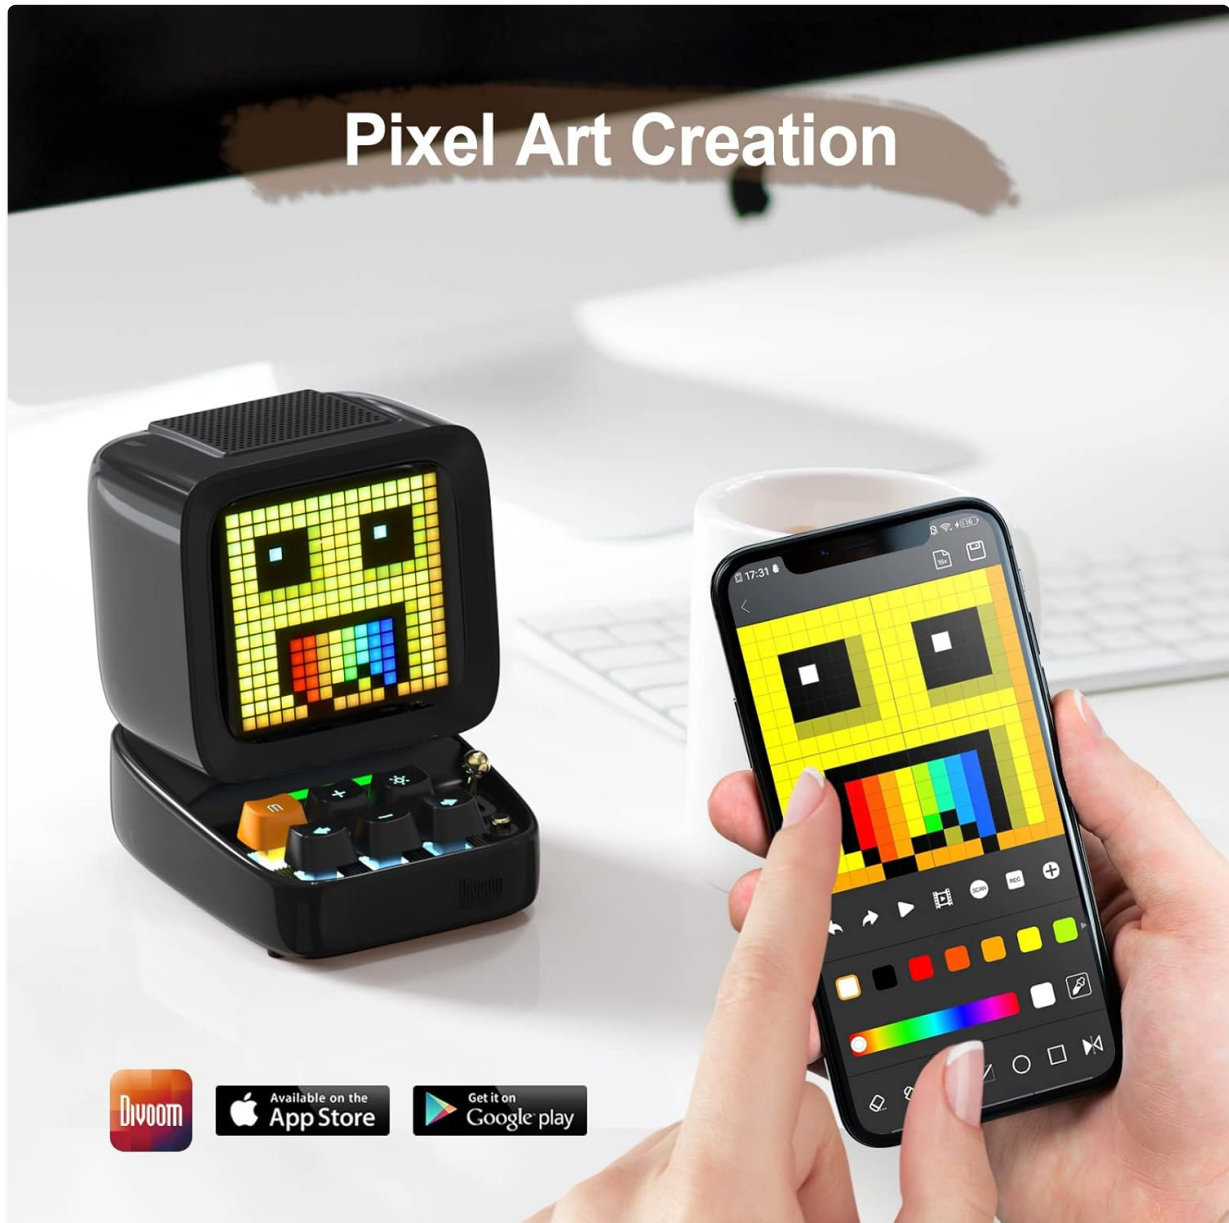

*Design and share your pixel art creations.*

# Pixel Creation Community

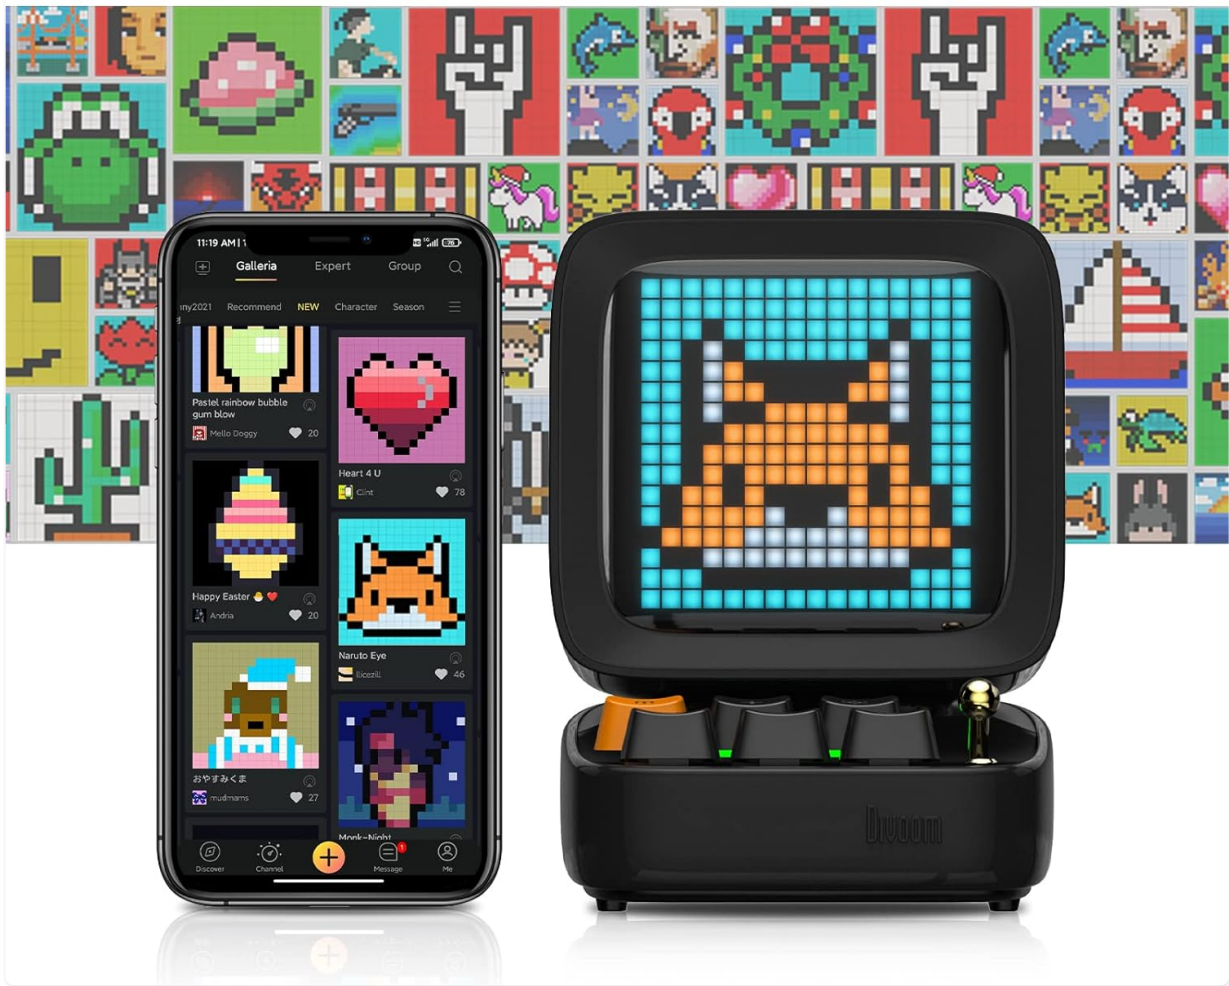

*Explore the pixel creation community.*

## 6. Maintenance

To ensure the longevity and optimal performance of your Divoom Ditoo speaker, follow these maintenance guidelines:

- Keep the device dry. Do not expose it to water or excessive moisture, as it is not waterproof.
- Clean the surface with a soft, dry cloth. Avoid using abrasive cleaners or solvents.
- Store the device in a cool, dry place when not in use.
- Avoid dropping or subjecting the device to strong impacts.
- Charge the battery regularly, even if not in frequent use, to maintain battery health.

## 7. Troubleshooting

If you encounter issues with your Divoom Ditoo, consider the following common solutions:

- **No Power:** Ensure the device is fully charged. Connect the USB-C cable and allow it to charge for a few minutes before attempting to power on again.
- **Bluetooth Connectivity Issues:**
  - Ensure Bluetooth is enabled on your source device (smartphone, tablet).
  - Make sure the Ditoo is within the 10-meter Bluetooth range.

- Try unpairing and re-pairing the device from your source device's Bluetooth settings.
- Restart both the Ditoo speaker and your source device.

- **No Sound:**

- Check the volume level on both the Ditoo and your source device.
- Ensure the correct audio source is selected (if using wired connection).
- Verify that the music is playing on your source device.


- **Display Malfunction:** If the pixel screen is not displaying correctly, try resetting the device using the reset pin hole (12) on the back.

- **App Issues:** Ensure your Divoom app is updated to the latest version. If problems persist, try reinstalling the app.

For persistent issues not resolved by these steps, please refer to the official Divoom support channels.

## 8. Specifications

Feature	Detail
Model Name	Ditoo
Color	Black
Material	Metal, Plastic
Product Dimensions	3.54"D x 4.48"W x 4.77"H
Item Weight	808 Grams (1.78 pounds)
Speaker Type	Subwoofer
Speaker Maximum Output Power	15 Watts
Signal-to-Noise Ratio	80 dB
Frequency Response	30 Hz
Connectivity Technology	Bluetooth
Bluetooth Range	10 Meters
Battery Capacity	5000 Milliamp Hours
Battery Life	8 Hours
Charging Time	4 Hours
Control Method	App
Special Features	Display, LED Light

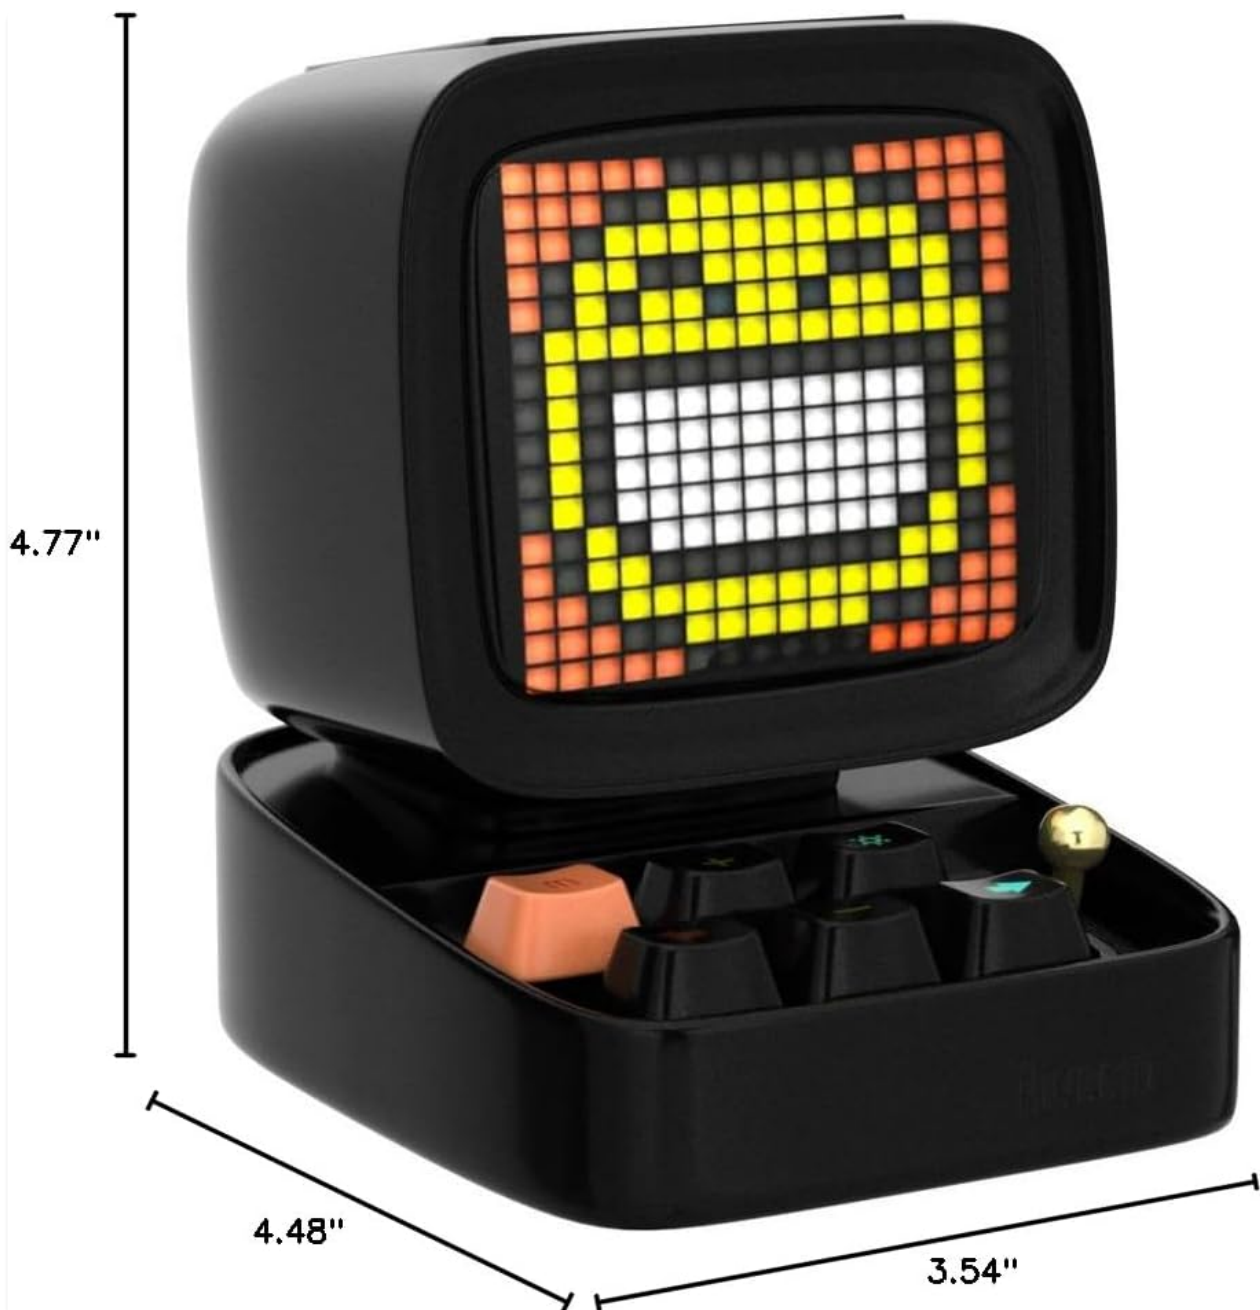

*Divoom Ditoo product dimensions.*

## 9. Warranty and Support

The Divoom Ditoo speaker comes with a Limited Warranty. For specific details regarding warranty coverage and terms, please refer to the official Divoom documentation or contact Divoom customer support.

For additional support, you can download the comprehensive User Manual in PDF format from the following link: [Divoom Ditoo User Manual \(PDF\)](#).


For direct assistance, please contact Divoom Official support through their official channels or the seller from whom you purchased the product.





#### INSTRUKCJA OBSŁUGI

Bezprzewodowy głośnik z wyświetlaczem pikselowym  
Ditoo Mic



divoom.pl

V1.0

## [Divoom Ditoo Mic: Bezprzewodowy Głośnik z Wyświetlaczem Pikselowym i Mikrofonem - Instrukcja Obsługi](#)

Kompleksowa instrukcja obsługi dla bezprzewodowego głośnika Divoom Ditoo Mic z wyświetlaczem pikselowym i funkcją karaoke. Dowiedz się o funkcjach, podłączaniu, obsłudze i specyfikacjach produktu.