

HYPERLITE 60W

HYPERLITE 60W Adjustable LED Wall Pack Light

Model: 60W (b2294b46-bf17-4df0-a31e-693cf9e3a249)

1. SAFETY INFORMATION

Please read and understand all instructions before installing or operating this product. Failure to follow these instructions may result in electric shock, fire, or other hazards that could cause property damage or personal injury.

- **Electrical Safety:** Always disconnect power at the circuit breaker before installation, maintenance, or removal. Ensure proper grounding to avoid electrical shock. All wiring should comply with local and national electrical codes.
- **Qualified Personnel:** Installation and servicing should be performed by a qualified electrician.
- **Product Integrity:** Do not modify or alter the product in any way. Do not operate the fixture if any parts are damaged.
- **Operating Environment:** This fixture is designed for outdoor use and is IP65 rated for protection against dust and water jets. Do not immerse in water.
- **Heat:** The fixture may become hot during operation. Allow it to cool before handling.

2. PRODUCT OVERVIEW

The HYPERLITE 60W LED Wall Pack Light is a high-efficiency, durable outdoor lighting solution designed for various applications such as buildings, parking lots, yards, and commercial spaces. It features an adjustable head for precise light direction and a robust, weather-resistant construction.

Key Features:

- **High Efficiency:** 60W LED emitting 7,800 lumens of 5000K natural white light, with an efficiency of up to 130LM/W.
- **Durable Construction:** Sturdy die-cast aluminum housing, impact-resistant, corrosion-resistant, and designed for strong heat dissipation.
- **IP65 Waterproof:** Suitable for use in rainy, snowy, and other adverse weather conditions.
- **Adjustable Design:** 0-90 degree adjustable light head and full cut-off design for controlled, directional lighting without light pollution.
- **Easy Installation:** Features a classic hinged structure and anti-falling screws for quick and secure mounting.
- **Long Lifespan:** Up to 100,000 hours of service life.

Package Contents:

- HYPERLITE 60W LED Wall Pack Light
- Mounting Hardware (screws, wiring caps)
- Instruction Manual



Figure 2.1: Front view of the HYPERLITE 60W LED Wall Pack Light.

3. SPECIFICATIONS

Attribute	Value
Brand	HYPERLITE
Model Number	b2294b46-bf17-4df0-a31e-693cf9e3a249
Wattage	60 watts

Attribute	Value
Brightness	7800 Lumen
Efficiency	130LM/W
Light Color	White (5000K)
Voltage	AC 120-277V
Material	Aluminum, Polycarbonate(PC)
Color	Bronze
Water Resistance Level	IP65 Waterproof
Mounting Type	Wall Mount
Item Dimensions (L x W x H)	11.1"L x 8.5"W x 4.3"H
Control Method	Push Button (Note: This model does not have a photocell function and is controlled by a switch.)
Certifications	ETL Approved

Product Dimensions

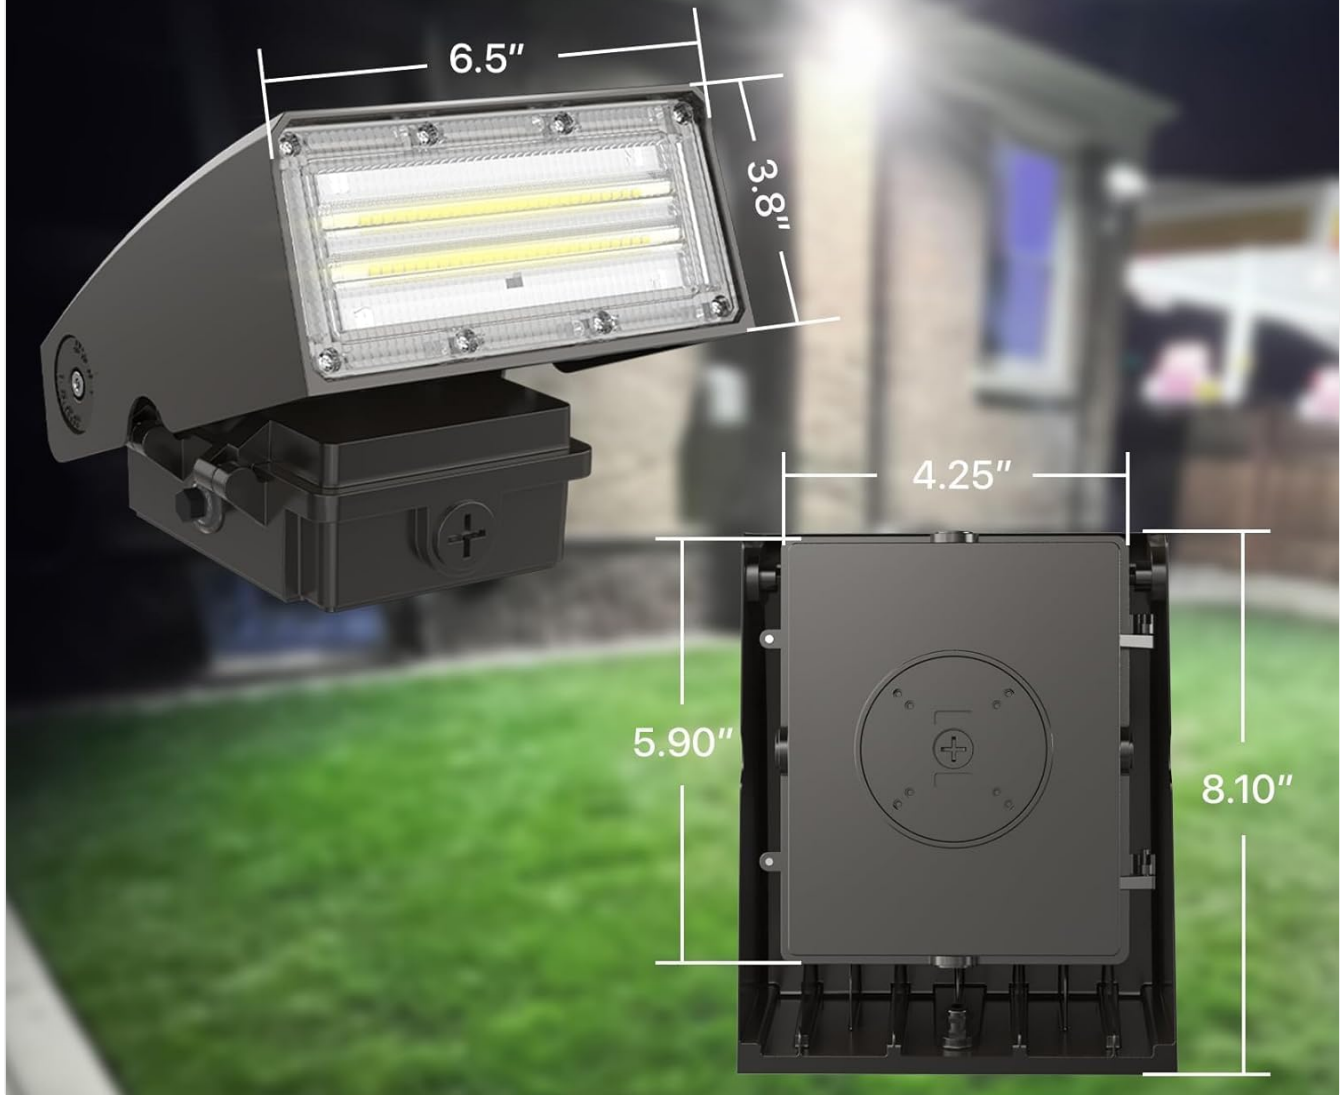


Figure 3.1: Product Dimensions.

4. SETUP AND INSTALLATION

The HYPERLITE Wall Pack Light is designed for quick and easy installation. A single person can typically complete the installation in about 15 minutes.

Installation Steps:

1. **Prepare the Mounting Surface:** Ensure the wall surface is clean, stable, and capable of supporting the fixture's weight.
2. **Mount the Back Plate:** Secure the back plate of the fixture to the wall using the provided mounting screws. The back plate features a leveling bubble for accurate installation.
3. **Wiring:** Connect the electrical wires (live, neutral, ground) from your power source to the corresponding wires in the fixture's junction box. Use the provided wiring caps to secure connections. The fixture's hinged structure allows easy access to the wiring compartment.
4. **Secure the Fixture:** Close the fixture onto the back plate. The anti-falling screws prevent accidental drops.


during this step. Tighten the screws to secure the fixture. The EVA gasket on the back cover ensures a stable, shock-absorbing fit against the wall, preventing shaking.

5. **Adjust Light Direction:** Once secured, adjust the light head to the desired angle (0-90 degrees) to direct illumination precisely where needed.

Considerate Design for Easy Installation

The Hyperlite's wall pack is thoughtful in details for easy and quick installation, Electrician choice.

- 1 Leveling bubble for accurate installation

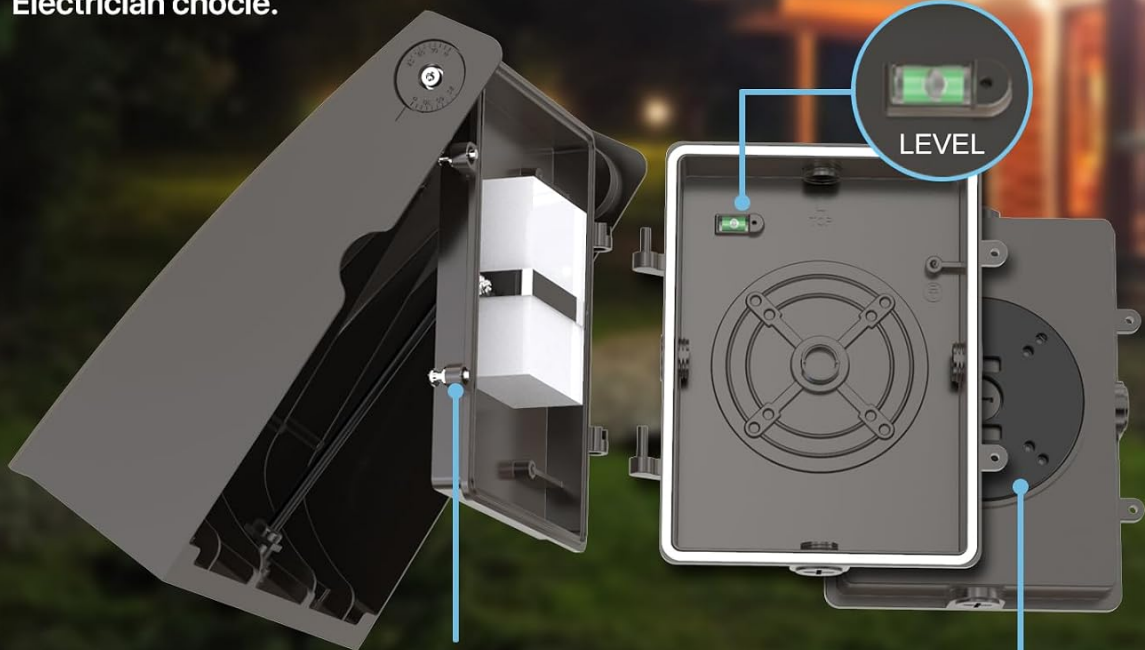

LEVEL

Anti-off designed lock screws

- 4 Wiring caps and mounting screws included

EVA gasket for shock resistance

Figure 4.1: Easy Installation Design with Leveling Bubble, Anti-falling Screws, and EVA Gasket.



Figure 4.2: Step-by-step installation guide.

Installation Video:

Your browser does not support the video tag.


Video 4.1: This video demonstrates the installation process and highlights the super bright illumination provided by the HYPERLITE LED Wall Pack Light in various outdoor settings.

5. OPERATING INSTRUCTIONS

The HYPERLITE 60W LED Wall Pack Light is designed for straightforward operation once installed.

- **Power On/Off:** The light is controlled by an external wall switch (not included). Flip the switch to turn the light on or off.
- **Adjusting Light Direction:** The fixture features a 0-90 degree adjustable light head. To change the direction of the light, carefully loosen the adjustment screws on the side of the fixture, pivot the light head to the desired angle, and then securely tighten the screws. This allows you to aim the light precisely, avoiding light pollution or disturbing neighbors.

Easy Installation

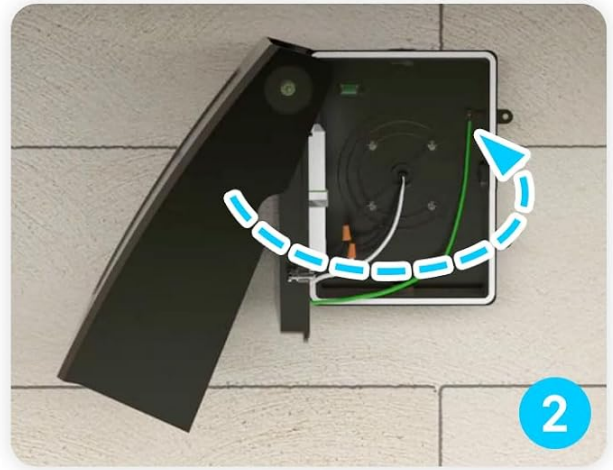

Control Where Light Goes

This wall pack has fully adjustable cut off, from full cut off up to 90°

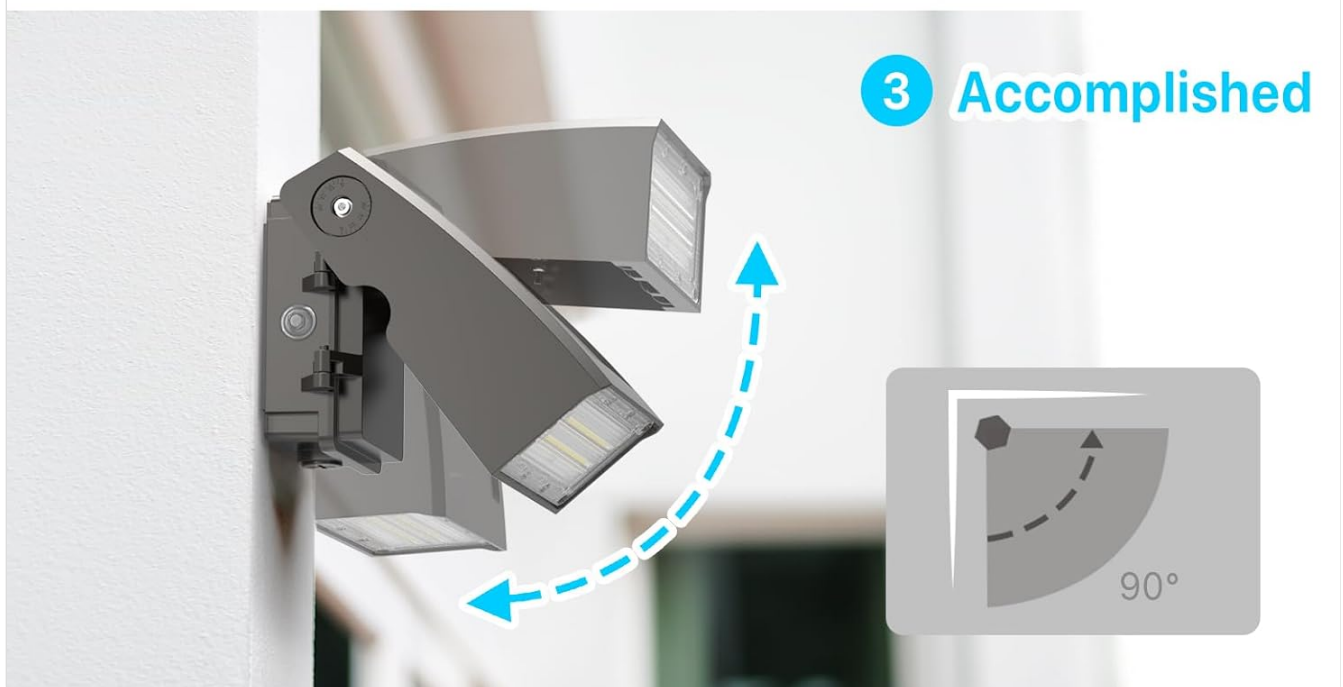


Figure 5.1: Adjustable Light Head for Directional Lighting.

Adjustable Feature Video:

Your browser does not support the video tag.

Video 5.1: This video illustrates the 0-90 degree adjustable head and full cut-off design of the HYPERLITE LED Wall Pack Light, allowing precise directional lighting control.

6. MAINTENANCE

The HYPERLITE LED Wall Pack Light requires minimal maintenance due to its durable construction and IP65 rating.

- **Cleaning:** Periodically clean the exterior of the fixture with a soft, damp cloth to remove dirt and debris. Do not use abrasive cleaners or solvents, as these may damage the finish or lens.
- **Inspection:** Regularly inspect the fixture for any signs of damage, loose connections, or wear. If any issues are found, disconnect power and contact a qualified electrician or HYPERLITE customer support.
- **No User-Serviceable Parts:** The LED components are integrated and not user-serviceable. Do not attempt to open the sealed light compartment.



Figure 6.1: The IP65 waterproof design ensures durability in all weather conditions.

7. TROUBLESHOOTING

If you encounter issues with your HYPERLITE LED Wall Pack Light, refer to the following common troubleshooting steps:

- **Light Does Not Turn On:**
 - Check the circuit breaker to ensure power is supplied to the fixture.
 - Verify that the wall switch is in the 'ON' position.
 - Inspect wiring connections for any looseness or damage (ensure power is off before inspection).
- **Light Flickers or Dims:**
 - Ensure the power supply voltage is within the specified range (AC 120-277V).
 - Check for loose wiring connections.
 - If the issue persists, contact customer support.
- **Water or Moisture Inside Fixture:**
 - Immediately disconnect power.
 - Inspect the installation for proper sealing and ensure all screws are tightened. The EVA gasket should be properly seated.
 - Contact customer support if the issue cannot be resolved, as this may indicate a defect.

For any issues not covered here, please contact HYPERLITE customer support.

8. WARRANTY AND SUPPORT

HYPERLITE stands behind the quality of its products.

- **Five-Year Warranty:** This LED wall pack light comes with a five-year warranty service.
- **Defect Replacement:** If any defects occur within 1 year of purchase, HYPERLITE will deliver a new wall pack to you.
- **Technical Support:** We provide quick technical solutions for 5 years from the date of purchase.
- **ETL Certification:** The product is ETL certified, ensuring it meets recognized safety standards.

For warranty claims, technical assistance, or any other inquiries, please visit the official HYPERLITE website or contact our customer service team directly. Please have your model number (b2294b46-bf17-4df0-a31e-

693cf9e3a249) and proof of purchase ready.

© 2026 HYPERLITE. All rights reserved.

For more information, visit [HYPERLITE Store](#)