

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [TALOYA](#) /

› [TALOYA 18W LED Flush Mount Ceiling Light Instruction Manual](#)

## TALOYA B07ZHSVGVZ

# TALOYA 18W LED Flush Mount Ceiling Light Instruction Manual

Model: B07ZHSVGVZ

[Safety Information](#) [Package](#)

[Contents](#)

[Specifications](#)

[Installation](#)

[Operation](#)

[Maintenance](#)

[Troubleshooting](#)

[Warranty &](#)

[Support](#)

## 1. SAFETY INFORMATION

Please read these instructions carefully before installation and retain them for future reference. Installation should be performed by a qualified electrician or in accordance with local electrical codes.

- **Risk of Electric Shock:** Disconnect power at the circuit breaker before installation or servicing.
- **Fire Hazard:** Use only with specified voltage (120 Volts).
- **Indoor Use Only:** This fixture is designed for indoor use. Do not expose to moisture or outdoor elements.
- **Non-Dimmable:** This ceiling light is not dimmable. It must only be used with a regular ON/OFF switch.
- **Secure Mounting:** Ensure the fixture is securely mounted to a junction box or solid ceiling structure.
- **Material Safety:** High-quality fire-resistance plastic body prevents potential risks of electric shock or leakage.

## 2. PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- TALOYA 18W LED Flush Mount Ceiling Light Fixture
- Mounting Ring / Base Plate
- Wiring Connectors (Wire Nuts)
- Mounting Screws (for solid ceiling and junction boxes)
- Instruction Manual



**18w**

**Easy  
Installation**

**Surface  
Mounted**

**Minimalist Design**

Classic and simple design,  
suitable for all kinds of space

Image: Overview of the TALOYA 18W LED Flush Mount Ceiling Light and its main components.

### 3. PRODUCT SPECIFICATIONS

Feature	Detail
Brand	TALOYA
Model Number	B07ZHSVGZV
Power	18W
Brightness	1800 Lumens
Light Color	Daylight White (6500K)
Voltage	120 Volts
Dimensions (L x W x H)	8.9"L x 8.9"W x 0.94"H
Material	Plastic (Polycarbonate shade)
Mounting Type	Flush Mount
Dimmable	No
Indoor/Outdoor Usage	Indoor Use Only
Certification	FCC

# PRODUCT INFORMATION

Power 18w

Beam Angle 120°

Voltage AC100-240V 50/60Hz

Life time 30000H

## DIMENSIONS



Image: Detailed product information including power, voltage, brightness, and dimensions.

## 4. INSTALLATION INSTRUCTIONS

**Before You Begin:** Ensure power is disconnected at the circuit breaker. A screwdriver is required for installation.

### 1. Secure Base Plate:

Mount the base plate to the ceiling. Use tapered tapping screws for solid ceilings or flat head screws for junction boxes. The base plate design is compatible with most standard junction boxes.

**Compatible with the most junction boxes  
One For All, All For one**

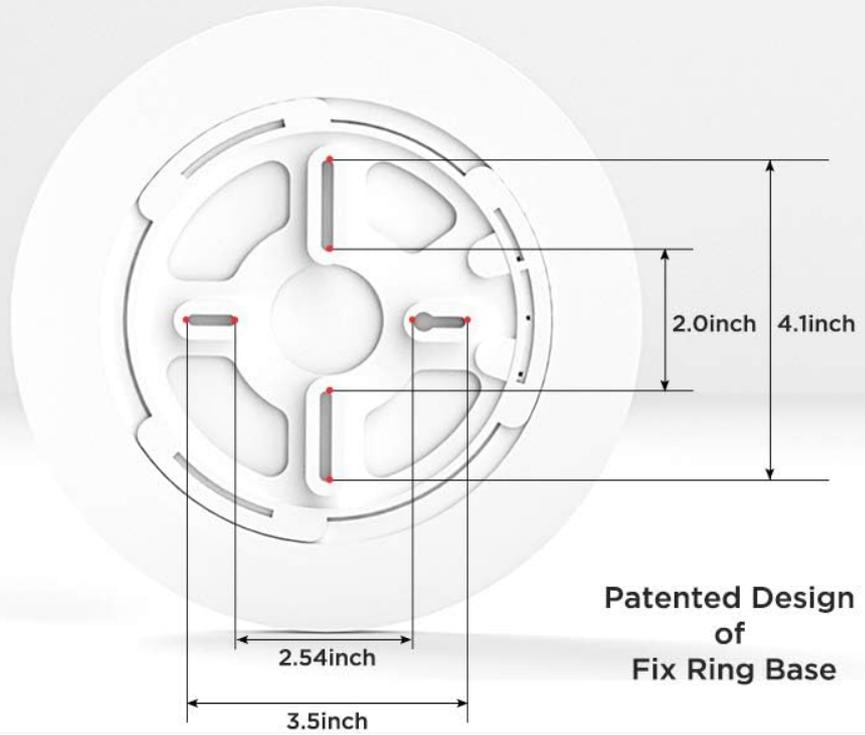


Image: The mounting ring base plate, designed for compatibility with various junction boxes.

**2. Connect AC Cables:**

Connect the AC cables using the provided wire nuts. Connect black to black and white to white. Ensure connections are secure.

# Easy Installation



Image: Close-up of electrical wiring connections using wire nuts.

### 3. Attach Light Fixture:

Push the wire nuts upwards into the ceiling cavity. Align the light fixture with the base plate and rotate it clockwise until it locks securely into place. This completes the installation.

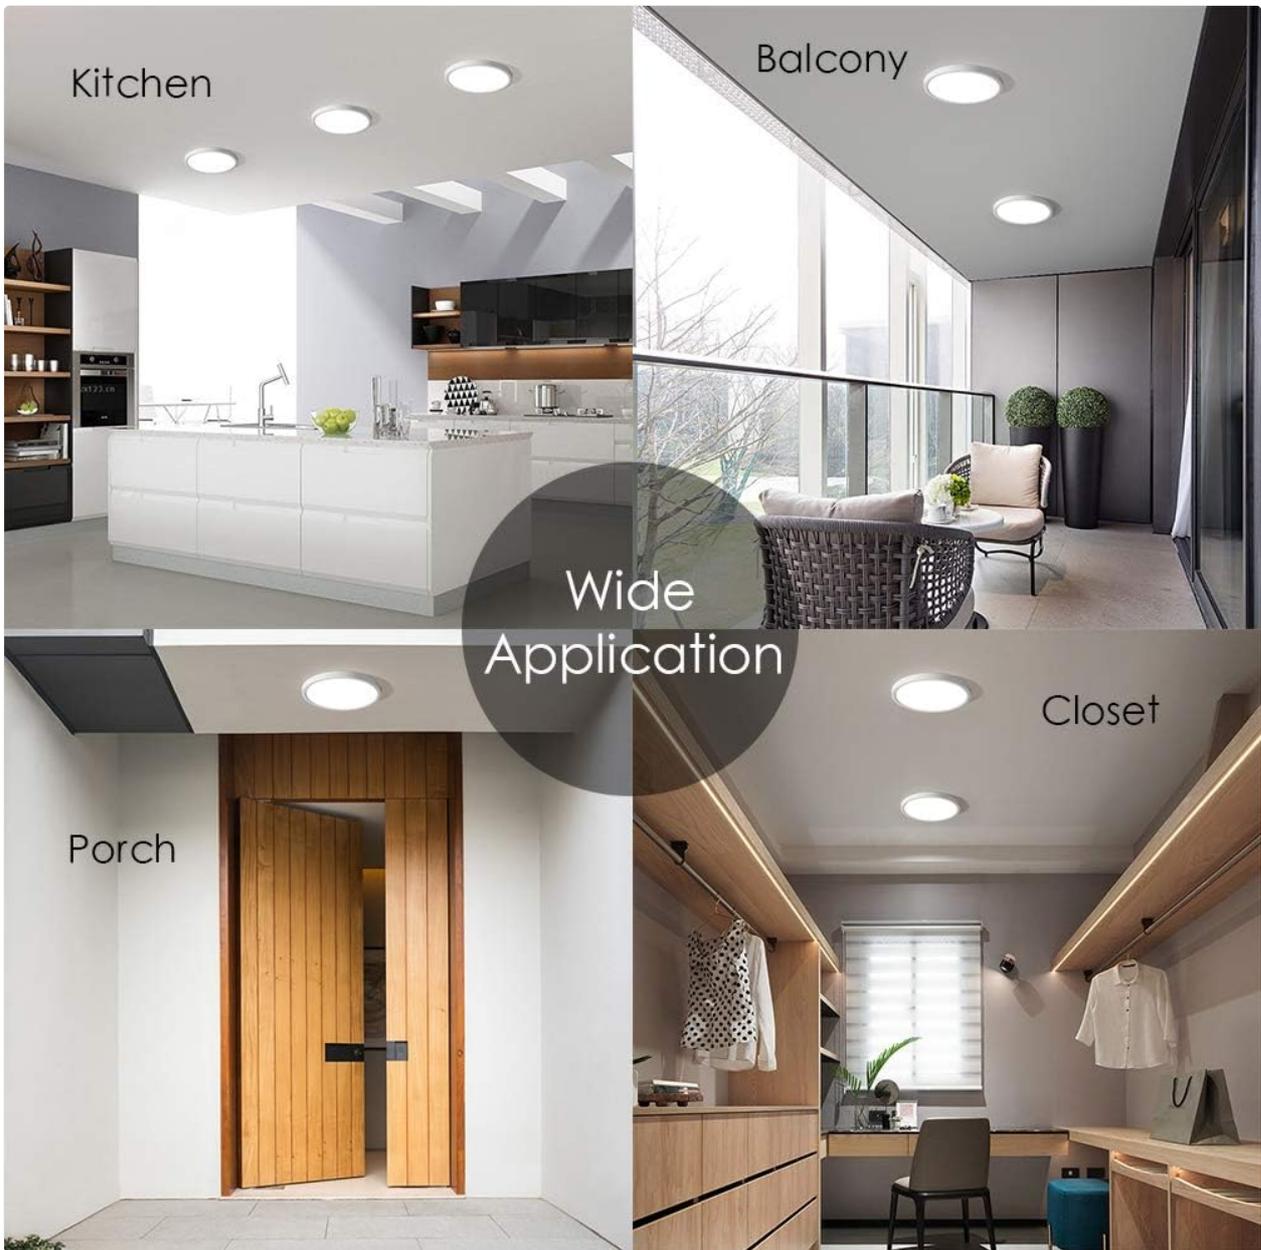


Image: Final step of installation, showing the light fixture being rotated onto the base plate.

### Installation Video Guide:

Your browser does not support the video tag.

Video: A visual guide demonstrating the installation process for the TALOYA 18W LED Ceiling Light.

## 5. OPERATION

The TALOYA 18W LED Flush Mount Ceiling Light is designed for simple operation.

- **Power On/Off:** Operate the light using a standard wall-mounted ON/OFF switch.
- **Non-Dimmable:** This fixture is not dimmable. Do not connect it to a dimmer switch, as this may cause malfunction or damage.
- **Light Output:** Provides 1800 lumens of Daylight White (6500K) light.

# PMMA Lamp-shade



## Easy Installation

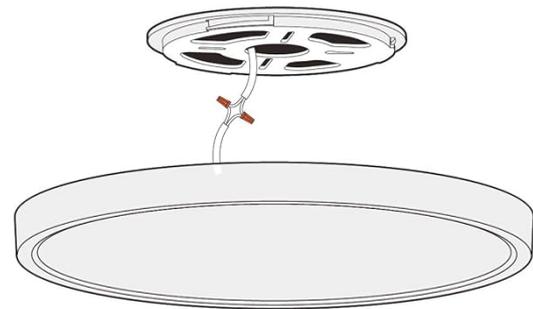


Image: The TALOYA LED Ceiling Light providing bright illumination in a kitchen setting.

## 6. MAINTENANCE

This LED ceiling light requires minimal maintenance.

- **Cleaning:** Ensure power is off before cleaning. Wipe the fixture with a soft, dry, or slightly damp cloth. Do not use harsh chemicals or abrasive cleaners.
- **No Bulb Replacement:** The integrated LED light source does not require bulb replacement.
- **Long-Term Reliability:** The plastic body is designed to resist decay or corruption over time, unlike some metal finishes.

## 7. TROUBLESHOOTING

If you encounter issues with your TALOYA LED Ceiling Light, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Light does not turn on.	<ul style="list-style-type: none"><li>◦ No power to the fixture.</li><li>◦ Loose wiring connection.</li><li>◦ Faulty switch.</li></ul>	<ul style="list-style-type: none"><li>◦ Check circuit breaker.</li><li>◦ Ensure all wire connections are secure (power off first).</li><li>◦ Test switch functionality.</li></ul>
Light flickers.	<ul style="list-style-type: none"><li>◦ Loose wiring.</li><li>◦ Incompatible dimmer switch (if mistakenly used).</li></ul>	<ul style="list-style-type: none"><li>◦ Check and secure wiring (power off first).</li><li>◦ Ensure a standard ON/OFF switch is used, not a dimmer.</li></ul>
Light is dim or inconsistent.	<ul style="list-style-type: none"><li>◦ Incorrect voltage supply.</li><li>◦ Fixture damage.</li></ul>	<ul style="list-style-type: none"><li>◦ Verify voltage supply is 120V.</li><li>◦ Contact customer support if fixture is damaged.</li></ul>

If the problem persists after attempting these solutions, please contact TALOYA customer support.

## 8. WARRANTY AND SUPPORT

**Warranty:** This TALOYA LED Ceiling Light is covered by a **2-year manufacturer's warranty** from the date of purchase. This warranty covers defects in materials and workmanship under normal use.

**What is Not Covered:** This warranty does not cover damage caused by improper installation, misuse, abuse, accidents, unauthorized repairs or modifications, or acts of nature.

**Customer Support:** For any questions, concerns, or warranty claims, please contact TALOYA customer support. Our team is available to provide assistance and quick solutions.

**Contact Information:** Please refer to the packaging or the official TALOYA website for the most current contact details.