

PAGARIA KN330

Pagaria 2 in 1 Bluetooth 5.0 Transmitter Receiver User Manual

Model: KN330 | Brand: PAGARIA

INTRODUCTION

The Pagaria KN330 is a versatile 2-in-1 Bluetooth 5.0 Transmitter and Receiver designed to enhance your audio experience. This compact and highly portable device allows you to wirelessly stream audio from non-Bluetooth devices to Bluetooth headphones or speakers (Transmitter Mode), or enable non-Bluetooth speakers to receive audio from your Bluetooth-enabled phone, tablet, or computer (Receiver Mode).

Featuring a simple slide switch for mode selection and a driverless plug-and-play design, the KN330 offers seamless connectivity and convenience for both home and on-the-go use. It is powered via a USB interface, eliminating the need for internal batteries.

PRODUCT OVERVIEW

The Pagaria KN330 is a small, lightweight device with a durable plastic body. It features a USB connector for power and an AUX port for audio input/output. A slide switch allows easy toggling between Transmitter (TX) and Receiver (RX) modes, indicated by LED lights.



Figure 1: Pagaria KN330 Bluetooth 5.0 Transmitter Receiver. This image shows the compact black device with a USB connector, a small LED indicator, and the "PAGARIA" brand name.

Key Features:

- **2-in-1 Functionality:** Operates as both a Bluetooth audio transmitter and receiver.
- **Bluetooth 5.0:** Ensures stable and efficient wireless audio transmission.
- **Easy Slide Switch Mode:** Simple physical switch to change between TX (Transmitter) and RX (Receiver) modes.
- **Driverless Plug & Play:** No software installation required; simply connect and use.
- **USB Powered:** Draws power directly from a USB port (e.g., TV, PC, USB adapter).
- **Built-in Microphone:** Available for hands-free calling in Receiver (RX) mode.
- **Compact & Portable:** Small dimensions (1.1 x 2.1 x 4.3 cm; 30 g) for easy transport.

Package Contents:

- 1x Pagaria KN330 Bluetooth 5.0 Audio Transmitter/Receiver Adapter
- 1x 3.5mm Aux Cable
- 1x User Manual (this document)

Unboxing Video:

Your browser does not support the video tag.

Video 1: Unboxing the Pagaria KN330 Bluetooth Transmitter Receiver. This video demonstrates the unboxing process, showing the device, 3.5mm AUX cable, and user manual included in the package.

SETUP INSTRUCTIONS

Transmitter Mode (TX) Setup:

Use Transmitter Mode to wirelessly stream audio from your non-Bluetooth TV, PC, or home stereo system to Bluetooth headphones or speakers.

1. **Set Mode:** Slide the switch on the KN330 to the **TX** position. The LED indicator will glow red.
2. **Connect Power:** Plug the KN330 into a USB port on your TV, PC, or a 5V-1Amp (or higher) USB adapter for power.
3. **Connect Audio:** Connect one end of the included 3.5mm Aux Cable to the KN330's 3.5mm port. Connect the other end to the audio output (headphone jack) of your non-Bluetooth device (e.g., TV, PC).
4. **Pairing:** Put your Bluetooth headphones or speakers into pairing mode. The KN330 will automatically search for and connect to nearby Bluetooth audio devices.
5. **Confirmation:** Once successfully paired, the red LED light on the KN330 will remain solid.

Important Note: For TV connections, ensure your TV has an Aux (Headphone) output port. This device does not support RCA or Optical audio ports for input.



Figure 2: Diagram illustrating Transmitter Mode setup. This image shows how the KN330 connects to a TV, laptop, or desktop PC via a 3.5mm AUX cable and USB power, then wirelessly transmits audio to Bluetooth headphones or speakers.

Receiver Mode (RX) Setup:

Use Receiver Mode to enable your non-Bluetooth speakers, car stereo, or wired headphones to receive audio wirelessly from your Bluetooth-enabled phone, tablet, or laptop.

1. **Set Mode:** Slide the switch on the KN330 to the **RX** position. The LED indicator will glow blue.
2. **Connect Power:** Plug the KN330 into a USB port on your car stereo, speaker, or a 5V-1Amp (or higher) USB adapter for power.
3. **Connect Audio:** Connect one end of the included 3.5mm Aux Cable to the KN330's 3.5mm port. Connect the other end to the Aux In port of your non-Bluetooth speaker or car stereo.
4. **Select Input:** Change the input mode of your speaker/car stereo to AUX or Line In.
5. **Pairing:** On your mobile device (phone, tablet, laptop), search for Bluetooth devices and select "KN330" to pair.
6. **Confirmation:** Once successfully paired, the blue LED light on the KN330 will remain solid.

STEPS FOR CONNECTION IN RX RECEIVER MODE



1. Slide KN330 to RX Mode
2. Power KN330 to USB Port of Car Stereo/ Speaker or any other external power
3. Connect Aux Cable to KN330
4. Connect Aux Cable other end to Car Stereo / Speaker Aux In Port
5. Change Mode of Car Stereo / Speaker to AUX / Line In Mode
6. Search “KN330” on your Mobile, Connect and you are ready to enjoy music.

Figure 3: Step-by-step guide for Receiver Mode connection. This image details the process of connecting the KN330 to a car stereo or speaker via USB power and a 3.5mm AUX cable, then pairing with a mobile device.

OPERATING INSTRUCTIONS

Mode Switching:

The KN330 features a convenient slide switch for instant mode changes. Simply slide the switch to the desired mode:

- **TX (Transmitter) Mode:** Slide the switch to "TX". The LED will turn red.
- **RX (Receiver) Mode:** Slide the switch to "RX". The LED will turn blue.

This design ensures the device remains in the assigned mode until manually switched, unlike other adapters that may

require re-pairing after power cycles.

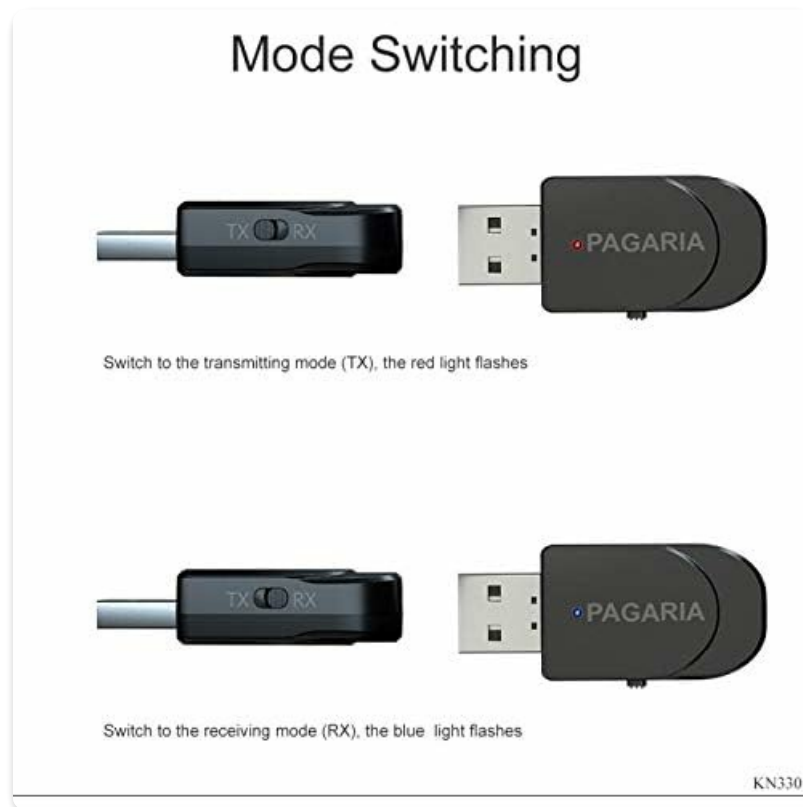


Figure 4: Visual representation of mode switching. This image shows the KN330 with its slide switch, indicating how to switch between TX (red light) and RX (blue light) modes.

Pairing with Bluetooth Devices:

For initial pairing or re-pairing in Transmitter Mode:

1. Ensure the KN330 is in TX mode and powered on.
2. Place your Bluetooth headphones or speakers in pairing mode (refer to their respective manuals for instructions).
3. The KN330 will automatically connect to the nearest discoverable Bluetooth audio device.
4. For some headphones, you may need to long-press their On/Off switch for 6-7 seconds until their pairing light flashes rapidly.

For initial pairing or re-pairing in Receiver Mode:

1. Ensure the KN330 is in RX mode and powered on.
2. On your mobile device, go to Bluetooth settings and search for "KN330".
3. Select "KN330" to connect.

Note: Only one device can be paired at a time with the KN330.

Official Product Video:

Your browser does not support the video tag.

Video 2: Pagaria 2 in 1 Bluetooth 5.0 Transmitter Receiver with Easy Slide Switch. This video provides a comprehensive overview of the product's features and its easy-to-use slide switch for mode selection.

MAINTENANCE

To ensure the longevity and optimal performance of your Pagaria KN330, please follow these guidelines:

- **Avoid Moisture:** Ensure the transmitter/receiver is not exposed to moisture or liquids.
- **Clean Gently:** Use a soft, dry cloth to clean the device. Do not use harsh chemicals or abrasive cleaners.
- **Proper Storage:** Store the device in a cool, dry place when not in use.

TROUBLESHOOTING

Common Issues and Solutions:

- **No Audio / Pairing Issues:**
 - Ensure the KN330 is in the correct mode (TX for transmitting, RX for receiving).
 - Verify that the 3.5mm Aux Cable is securely connected to both the KN330 and the audio source/output device.
 - Make sure your Bluetooth headphones/speakers or mobile device are in pairing mode and within the 10-meter range.
 - Try restarting both the KN330 and the connected Bluetooth device.
- **Audio Distortion / Buzzing Sound / Hissing Sound:**
 - **Solution:** Power the KN330 separately using a dedicated 5V-1Amp (or above) USB adapter, and NOT directly from a TV or PC USB port. This often resolves power-related audio interference.
- **Device Not Powering On:**
 - Ensure the USB power source is active and providing sufficient power (5V-1Amp recommended).
 - Try a different USB port or power adapter.

TECHNICAL SPECIFICATIONS

Feature	Detail
Brand	PAGARIA
Model	KN330
Model Name	KN330 BLUETOOTH TRANSMITTER RECEIVER
Product Dimensions	1.1 x 2.1 x 4.3 cm
Item Weight	30 g

Hardware Interface	Bluetooth 5.0 A2DP, AVRCP (receiver mode only)
Wireless Type	Bluetooth
Connector Type	3.5mm Aux Port, USB
Compatible Devices	Smartphone, TV (with Aux out), Home Theater, Speakers, Headphones
Special Features	Built-in Microphone (for RX Mode)
Power Source	AC (via USB adapter)
Batteries Required	No
Bluetooth Range	10 meters

WARRANTY AND SUPPORT

For any product-related queries, technical support, or warranty information, please contact Pagaria customer service:

- **WhatsApp:** 6363772699
- **Telephone:** 080-23492250

Please retain your purchase receipt for warranty claims. For the latest information on warranty, payment options, and delivery, please refer to the product's detail page on Amazon.in.

© 2025 PAGARIA. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question