JOYOUNG DJ10U-K1

Joyoung DJ10U-K1 Multi-Functional Beverage Maker

User Instruction Manual

1. Introduction

The Joyoung DJ10U-K1 is a versatile 4-in-1 appliance designed to prepare a variety of beverages, including soy milk, coffee, fresh juice, and hot water. This manual provides detailed instructions for safe operation, setup, maintenance, and troubleshooting to ensure optimal performance and longevity of your appliance.



Image 1.1: Front view of the Joyoung DJ10U-K1 Multi-Functional Beverage Maker.

2. Safety Precautions

To prevent injury or damage to the appliance, please read and adhere to the following safety guidelines:

- Always ensure the appliance is placed on a stable, flat, and dry surface.
- Do not immerse the main unit in water or any other liquid.
- Keep out of reach of children and pets.
- Unplug the appliance from the power outlet before cleaning or when not in use.
- Do not operate the appliance if the power cord or plug is damaged.
- Avoid touching hot surfaces during and immediately after operation. Use handles or oven mitts.
- Ensure the glass pot is correctly positioned before starting any function to prevent spills.
- Do not overfill the water reservoir or the processing chamber.

3. Product Components

Familiarize yourself with the main components of your Joyoung DJ10U-K1:

- **Main Unit:** Houses the motor, heating element, and control panel.
- **Water Reservoir:** Removable tank for clean water supply.
- **Processing Chamber:** Internal chamber where ingredients are processed.
- **Blades:** High-speed blades for grinding and mixing.
- **Glass Pot:** Detachable pot for collecting the finished beverage.
- **Control Panel:** Digital display and touch buttons for function selection and settings.

4. Setup

Follow these steps for initial setup:

1. **Unpack:** Carefully remove all packaging materials and inspect the appliance for any damage.
2. **Initial Cleaning:** Before first use, clean all removable parts (glass pot, water reservoir) with warm, soapy water. Wipe the main unit with a damp cloth. Dry thoroughly.
3. **Position the Glass Pot:** Place the empty glass pot securely on the designated tray at the front of the machine. Ensure it is correctly aligned to receive the processed beverage.



Image 4.1: Correct placement of the glass pot on the machine's base.

4. **Fill Water Reservoir:** Remove the water reservoir from the back of the unit. Fill it with clean, filtered water up to the desired level (300ml, 500ml, 800ml, or 1000ml markings are available). Reinsert the reservoir firmly into its slot.



Image 4.2: Top: Removing the water reservoir for filling. Bottom: Pouring out wastewater from the collection tray.

5. **Connect Power:** Plug the power cord into a grounded electrical outlet. The control panel will illuminate.

5. Operating Instructions

The Joyoung DJ10U-K1 features a dual-language control panel for ease of use. Refer to the control panel image for button identification.

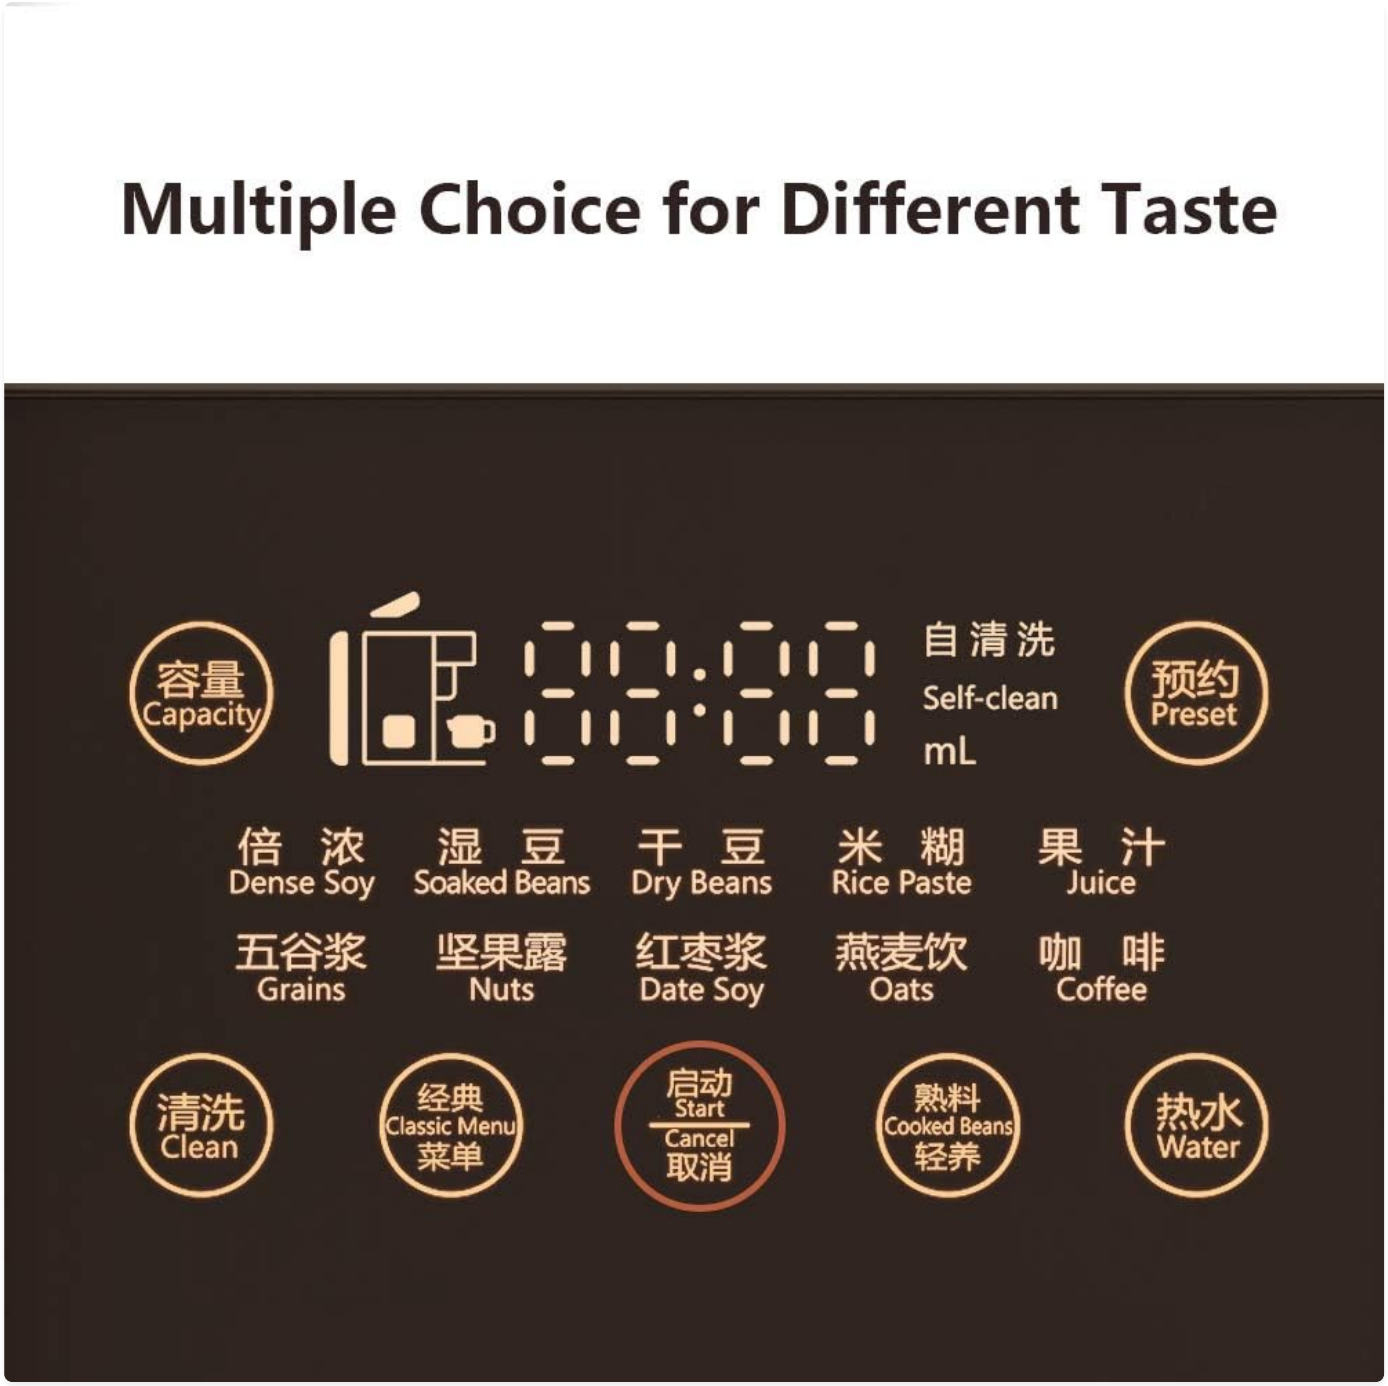


Image 5.1: Detailed view of the control panel with various function buttons.

5.1 General Operation

1. **Select Capacity:** Press the "Capacity" button to cycle through 300ml, 500ml, 800ml, or 1000ml options, depending on your needs.
2. **Choose Function:** Select your desired function (Soy Milk, Coffee, Juice, Hot Water) from the control panel.
3. **Start:** Press the "Start" button to begin the selected program.
4. **Preset Function:** To use the preset timer (3-12 hours), press the "Preset" button after selecting your function. Adjust the time using the appropriate buttons. This allows you to prepare ingredients in advance for a delayed start.

5.2 Soy Milk Function

This function prepares smooth, residue-free soy milk due to the 20,000 rpm high-speed grinding, eliminating the need for filtration.

1. Add pre-soaked or dry soybeans to the processing chamber according to recipe guidelines.

2. Ensure the water reservoir is filled to the desired capacity.
3. Select the "Soy Milk" function on the control panel.
4. Press "Start". The machine will automatically process and dispense the soy milk into the glass pot.

5.3 Coffee Function

The machine utilizes professional extraction technology for brewing coffee.



Image 5.2: The machine preparing Americano coffee.

1. Add ground coffee beans to the designated coffee filter or chamber.
2. Ensure the water reservoir is filled.
3. Select the "Coffee" function.
4. Press "Start". The machine will brew and dispense coffee into the glass pot.

5.4 Juice Function

Prepare fresh juice from fruits and vegetables.



Image 5.3: The machine preparing fresh juice.

1. Add cut fruits or vegetables to the processing chamber.
2. Ensure the water reservoir is filled.
3. Select the "Juice" function.
4. Press "Start". The machine will blend and dispense juice.

5.5 Water Kettle Function

Heat water to a desired temperature.

1. Ensure the water reservoir is filled.
2. Select the "Hot Water" function.
3. Press "Start". The machine will heat the water and dispense it.

6. Cleaning and Maintenance

Regular cleaning ensures hygiene and extends the life of your appliance.

6.1 Automatic Cleaning

The Joyoung DJ10U-K1 features an automatic cleaning function to simplify maintenance of the internal processing chamber.



Image 6.1: Illustration of the automatic cleaning process, including rinsing, spraying, and stirring.

1. After use, ensure the glass pot is empty and correctly positioned.
2. Ensure the water reservoir has sufficient clean water.
3. Press the "Clean" or "Self-clean" button on the control panel.
4. The machine will initiate a cleaning cycle involving water pumping, high-temperature steaming, and blade stirring to thoroughly clean and disinfect the inner wall.
5. Once the cycle is complete, remove and empty the wastewater collection tray (refer to Image 4.2).

6.2 Manual Cleaning

- Always unplug the appliance before manual cleaning.
- Wash the glass pot and water reservoir with warm, soapy water. Rinse thoroughly and dry.
- Wipe the exterior of the main unit with a damp cloth. Do not use abrasive cleaners or immerse the main unit in water.
- For stubborn stains in the processing chamber, a soft brush can be used after the automatic cleaning cycle, ensuring the appliance is unplugged.

7. Troubleshooting

If you encounter issues, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Appliance does not power on.	Not plugged in; Power outlet issue; Damaged cord.	Ensure plug is fully inserted. Test outlet with another device. Do not use if cord is damaged; contact support.
Program does not start.	Water reservoir empty; Glass pot not in place; Lid not properly closed.	Fill water reservoir. Ensure glass pot is correctly seated. Close lid firmly.
Soy milk/Juice is too thick/thin.	Incorrect ingredient-to-water ratio.	Adjust the amount of ingredients or water according to desired consistency.
Automatic cleaning not effective.	Insufficient water; Heavy residue.	Ensure water reservoir is filled. Run cleaning cycle multiple times or perform manual cleaning.

If the problem persists after attempting these solutions, please contact customer support.

8. Specifications

- **Brand:** JOYOUNG
- **Model:** DJ10U-K1
- **Color:** Brown
- **Product Dimensions:** 16.22"D x 6.5"W x 14.17"H
- **Functions:** Soy Milk Maker, Coffee Maker, Juice Maker, Electronic Water Kettle
- **Capacity Range:** 300ml, 500ml, 800ml, 1000ml
- **Special Features:** Automatic Cleaning, No-filter Soy Milk (20,000 rpm), Intelligent Preset (3-12 hours)

9. Warranty and Support

For warranty information and customer support, please refer to the warranty card included with your product or visit the official JOYOUNG website. Keep your purchase receipt as proof of purchase for any warranty claims.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question