

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Babysense](#) /

› [Babysense New Video Baby Monitor with Camera and Audio, Long Range, Room Temperature, Infrared Night Vision, Two Way Talk Back, Lullabies and High Capacity Battery, Model V24R V24R-1CAM](#)

Babysense V24R

Babysense Video Baby Monitor User Manual

Model: V24R

INTRODUCTION

Thank you for choosing the Babysense Video Baby Monitor. This manual provides essential information for setting up, operating, and maintaining your new baby monitor. Please read it carefully before use and keep it for future reference.

SAFETY INFORMATION

Read the User Guide thoroughly before installing and using the product. Ensure all power adapters are used as specified in the user instructions. Keep cords out of reach of children to prevent strangulation hazards. This product is designed for indoor use only.

PACK CONTENTS

- Parent Unit x 1
- Baby Unit x 1
- AC Power Adapter x 2 (one for Parent Unit, one for Baby Unit)
- Li-ion Battery (pre-installed in Parent Unit) x 1
- User Manual x 1
- Set for wall mounting x 1 (screw and wall anchor)



Figure 1: Babysense V24R Video Baby Monitor components. The package includes one parent unit, one baby unit, two power adapters, a pre-installed Li-ion battery in the parent unit, a user manual, and wall mounting hardware.

PRODUCT OVERVIEW

Parent Unit Overview

The Parent Unit features a 2.4-inch High Quality Color LCD Display. It includes buttons for power/sleep, volume control, brightness adjustment, two-way talk, and menu navigation. A kickstand on the back allows for convenient tabletop placement.

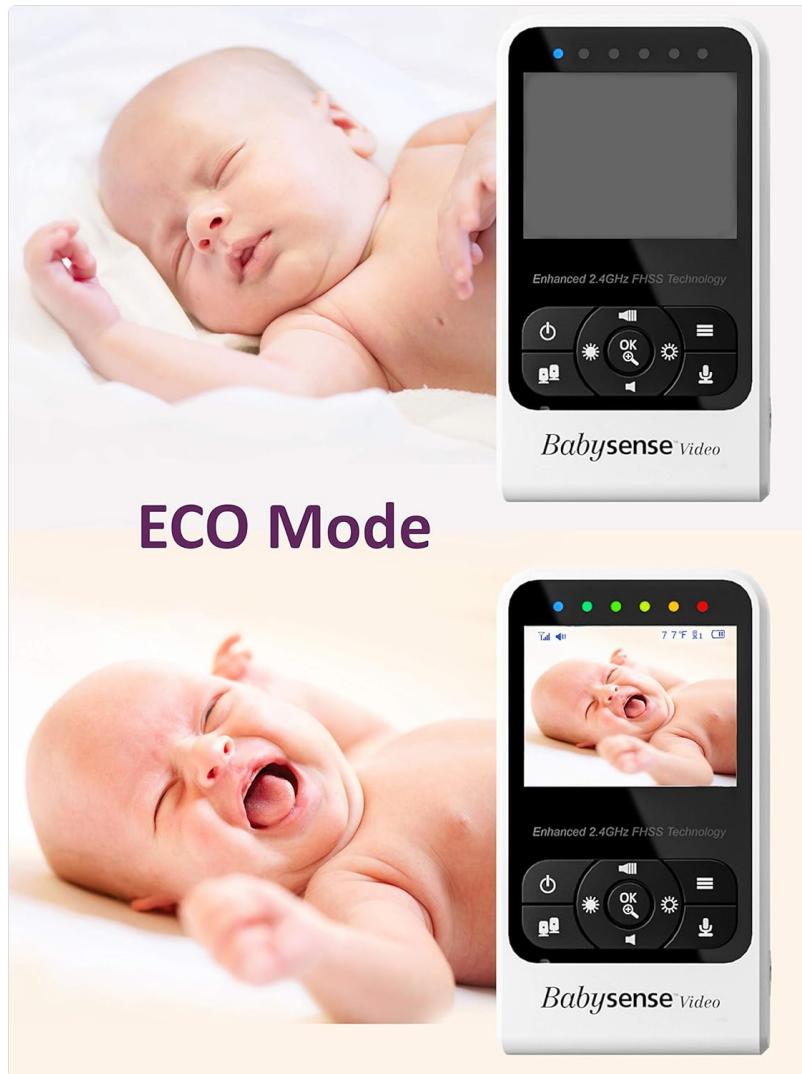


Figure 2: The Parent Unit display shows the live video feed from the baby unit. Control buttons below the screen allow for various functions including power, volume, brightness, talk-back, and menu access. The top of the unit features LED indicators for signal strength and battery level.

Baby Unit Overview

The Baby Unit (camera) is equipped with infrared LEDs for night vision, a wide-angle/zoom lens, a light sensor, microphone, and temperature sensor. It has a power LED, night light, and a PAIR button for connecting to the Parent Unit. The unit can be manually panned 360 degrees and tilted 60 degrees.



Figure 3: The Baby Unit features a camera lens with infrared capabilities for night vision. It can be manually adjusted for 360-degree pan and 60-degree tilt to provide optimal viewing angles. The base includes a power input and a PAIR button.

SETUP

Initial Setup

1. Connect the AC power adapter to the Baby Unit and plug it into a wall outlet.
2. Connect the AC power adapter to the Parent Unit and plug it into a wall outlet. The Parent Unit will automatically turn on.
3. Place the Baby Unit in a location that provides the best view of your baby, ensuring it is out of reach of children.
4. The units are pre-paired at the factory. If pairing is lost, press the PAIR button on the Baby Unit and follow the on-screen instructions on the Parent Unit.

OPERATING

Key Features

- **Two-Way Talk Back:** Press and hold the microphone button on the Parent Unit to speak to your baby.
- **Infrared Night Vision:** The monitor automatically switches to night vision in low-light conditions, providing a clear black and white image.
- **Lullabies:** Access the menu to select and play pre-installed lullabies or white noise sounds to soothe your baby.
- **ECO Mode:** Activates voice activation, muting audio and turning off the screen until sound is detected.
- **Room Temperature Monitoring:** Displays the room temperature on the Parent Unit and provides high/low temperature alerts.
- **2x Digital Zoom:** Use the zoom function to get a closer look at your baby.
- **Multi-Camera Expandability:** Supports up to four cameras, allowing you to monitor multiple rooms.

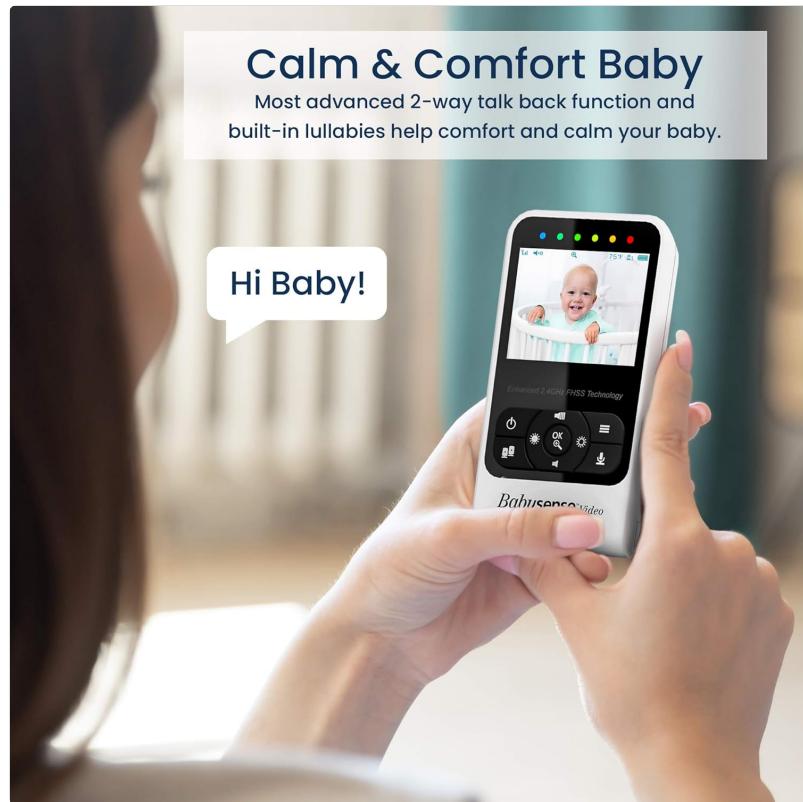


Figure 4: The two-way talk-back feature allows parents to comfort their baby remotely using their own voice through the Parent Unit.

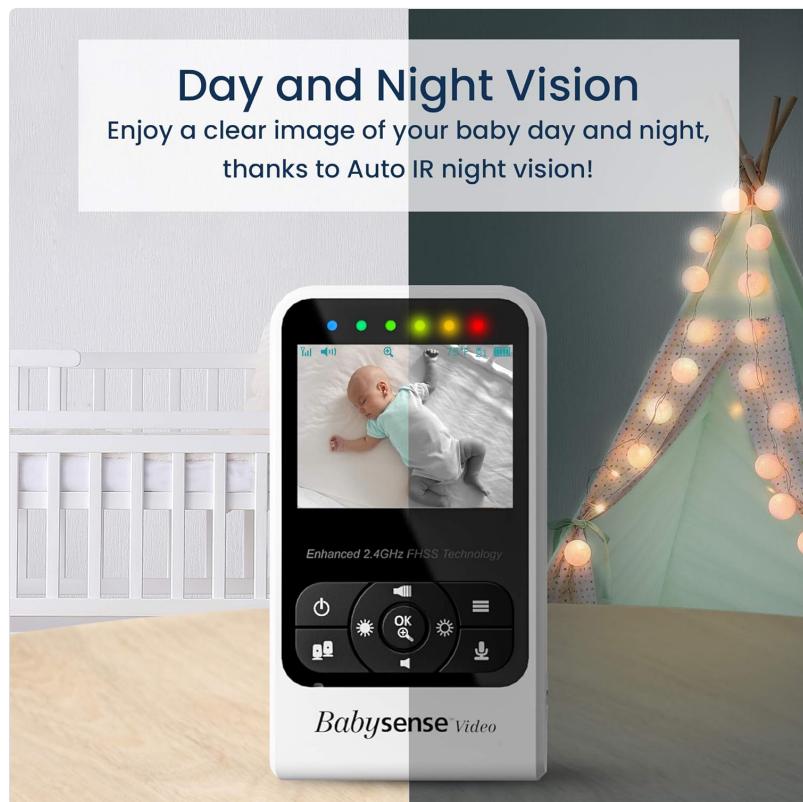


Figure 5: The monitor provides clear day and night vision, automatically switching to infrared night vision in low-light conditions to ensure continuous monitoring.

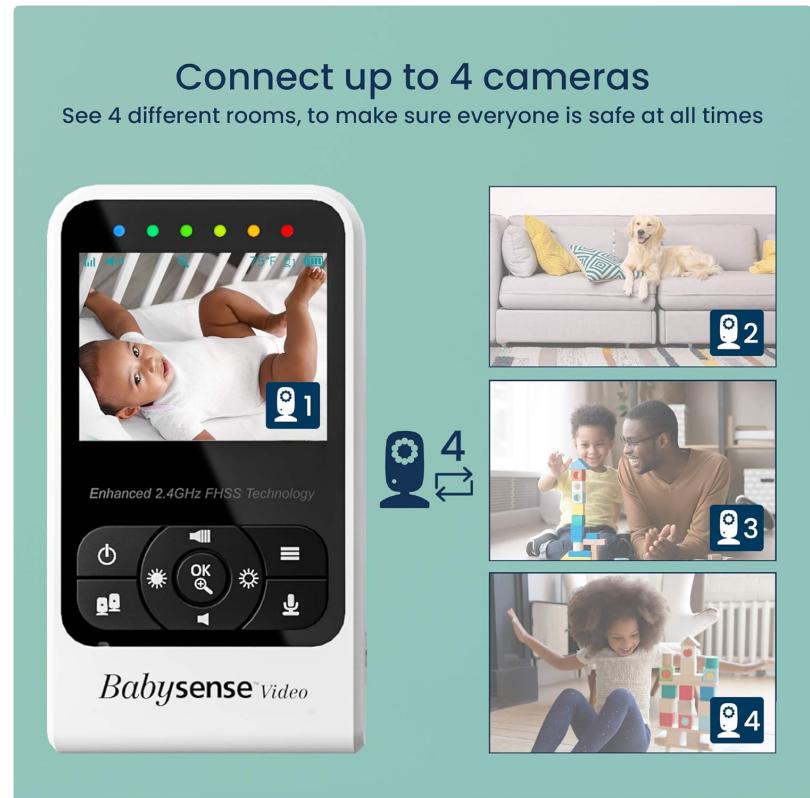


Figure 6: The multi-camera expandability feature allows users to connect and view up to four cameras, providing comprehensive monitoring across different rooms.

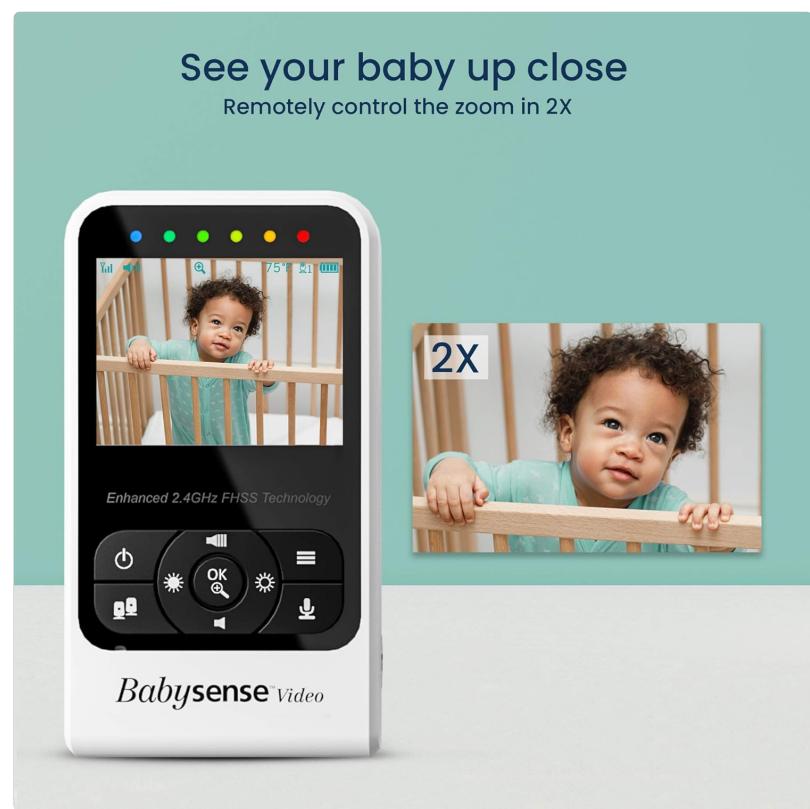


Figure 7: The 2x digital zoom function enables users to get a closer and more detailed view of their baby on the Parent Unit screen.

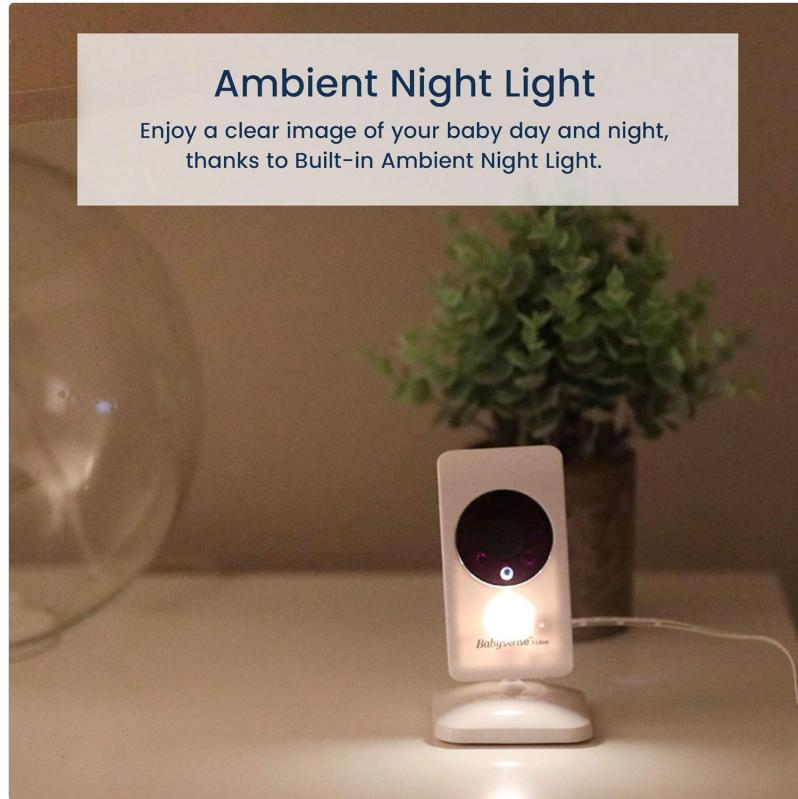


Figure 8: The built-in ambient night light on the Baby Unit provides a soft glow, which can be remotely operated from the Parent Unit.

Video 1: Official Babysense Video Baby Monitor V24R overview. This video demonstrates the key features and functionality of the Babysense V24R monitor, including its compact design, secure connection, two-way talk, night vision, and multi-camera support.

MAINTENANCE

To ensure optimal performance and longevity of your Babysense Video Baby Monitor, follow these maintenance guidelines:

- Clean the monitor units with a dry, soft cloth. Do not use cleaning agents or solvents.
- Avoid exposing the units to extreme temperatures, direct sunlight, or moisture.
- Regularly check the power cords for any signs of damage.

TROUBLESHOOTING

Problem	Possible Solution
No image/sound on Parent Unit	Ensure both units are powered on and within range. Check power connections.
Static or interference	Move the Parent Unit closer to the Baby Unit. Avoid placing units near other electronic devices.
Parent Unit battery drains quickly	Ensure the battery is fully charged. Reduce screen brightness or use ECO mode.
Cannot pair units	Press the PAIR button on the Baby Unit and follow the pairing instructions in the manual.

SPECIFICATIONS

- **Model Name:** V24R
- **Connectivity Technology:** Wireless (Enhanced 2.4GHz FHSS)
- **Screen Size:** 2.4 Inch LCD
- **Power Source:** Battery Powered (Parent Unit), Corded Electric (Baby Unit)
- **Special Features:** Portable, Night Vision, Motion Sensor, Two-Way Talk, Lullabies, Room Temperature Monitoring
- **Optical Zoom:** 2x Digital Zoom

- **Item Weight:** 1 Pound
- **UPC:** 854459007437

WARRANTY & SUPPORT

Activate your 1-year free warranty now by registering online. This ensures 100% coverage and provides additional benefits, including efficient warranty service when needed and safety notifications.

For any product-related questions or support, please contact Babysense Customer Service:

- **Tel:** (833) 568-2229
- **Email:** service@hisense.co.il



Figure 9: Warranty information and customer support contact details for Babysense products. Users are encouraged to register their product online for warranty activation and important updates.