

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [Bomcosy](#) /

› [Bomcosy LED Floor Lamp RGBW Smart Control User Manual](#)

Bomcosy FLD-025-F2-C58-K1

Bomcosy LED Floor Lamp RGBW Smart Control User Manual

INTRODUCTION

Welcome to your new Bomcosy LED Floor Lamp. This manual provides essential information for safe assembly, setup, and operation of your smart floor lamp. This lamp features RGBW color-changing capabilities, dimmable lighting, and smart control options via the Smart Life app, Amazon Alexa, and Google Home.

IMPORTANT SAFETY INSTRUCTIONS

- Read all instructions carefully before assembly and use.
- This product is designed for indoor use only. Do not expose to water or high humidity.
- Ensure the power supply voltage matches the lamp's requirements (240 Volts).
- Do not attempt to disassemble or modify the lamp.
- Keep away from heat sources and direct sunlight.
- Unplug the lamp from the power outlet before cleaning or when not in use for extended periods.
- If any damage occurs to the power cord or lamp, discontinue use immediately and contact customer support.


PACKAGE CONTENTS

Verify that all components are present:

- Lamp Head with LED Panel
- Multiple Pole Sections
- Lamp Base
- Power Adapter
- User Manual (this document)

ASSEMBLY INSTRUCTIONS

Follow these steps to assemble your Bomcosy LED Floor Lamp. Refer to the diagram below for visual guidance.

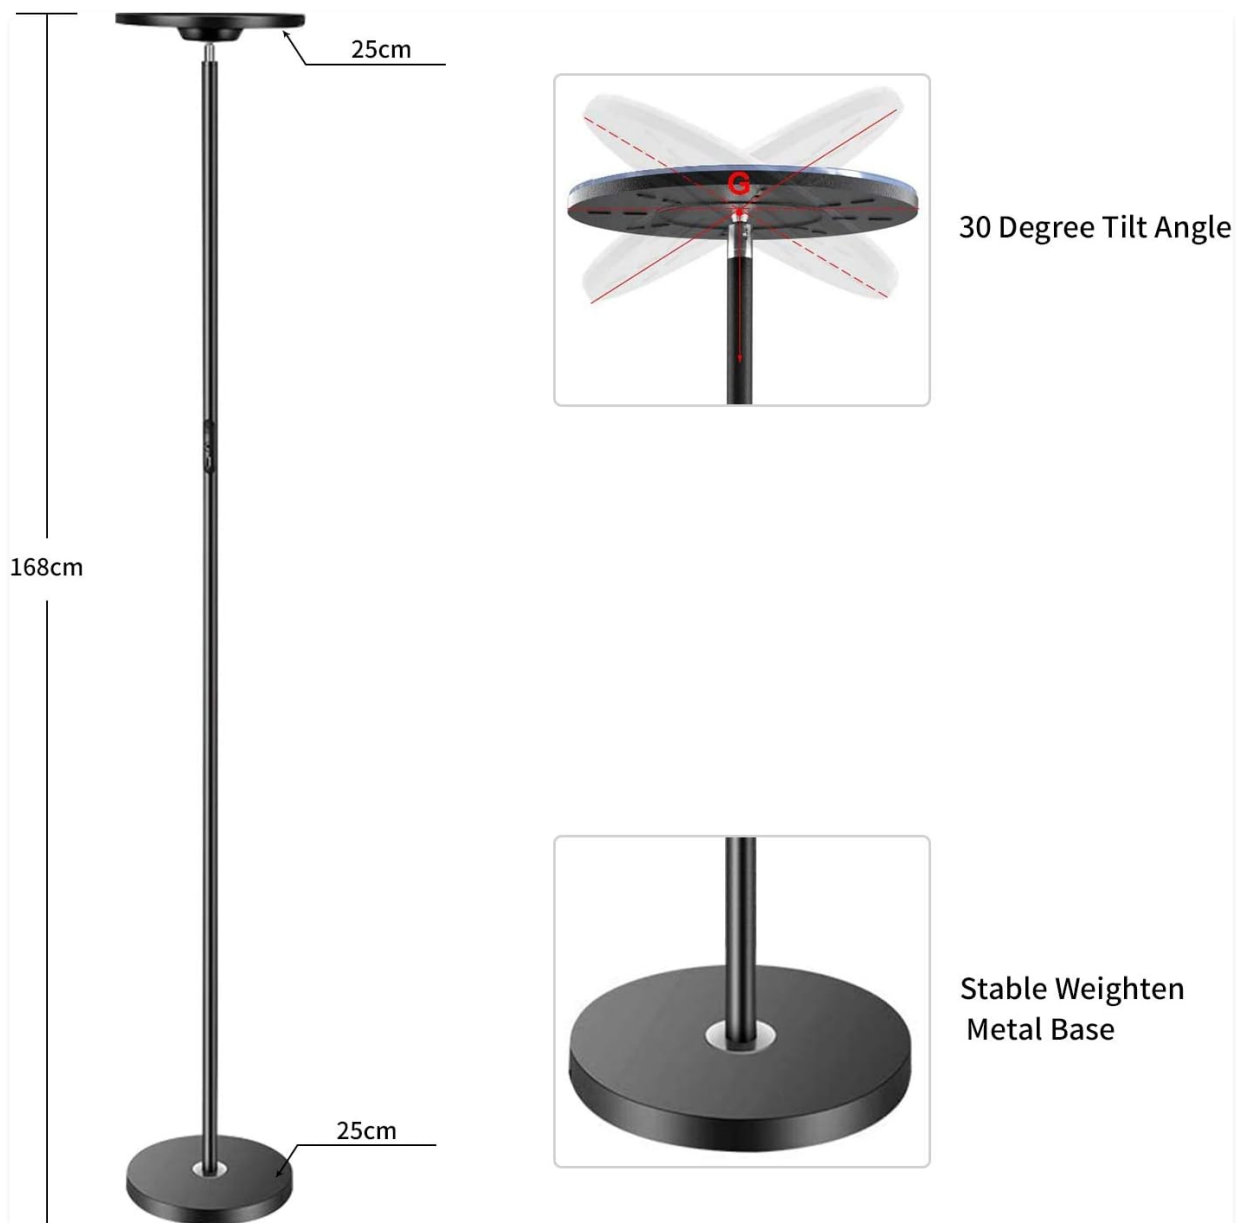

This diagram outlines the complete assembly process for the lamp.

1. **Step 1: Connect Pole Sections.** Screw the individual pole sections together firmly to form the main shaft of the lamp.
2. **Step 2: Attach Pole to Base.** Securely attach the assembled pole to the heavy lamp base by twisting it clockwise until tight.
3. **Step 3: Attach Lamp Head.** Connect the lamp head to the top of the pole. Ensure it is seated correctly.
4. **Step 4: Connect Internal Wiring.** Locate the internal wiring connectors within the pole sections and securely plug them together. This is typically a white connector.
5. **Step 5: Final Pole Connection.** Connect any remaining pole sections, ensuring all connections are tight and the lamp is stable.
6. **Step 6: Connect Power Adapter.** Plug the power adapter into the lamp's power input port, usually located near the base.

SMART CONTROL SETUP

Your Bomcosy LED Floor Lamp can be controlled via the Smart Life app, Amazon Alexa, and Google Home. Follow these steps to connect your lamp:

1. Download the Smart Life App

Search for "Smart Life" in your smartphone's app store (iOS or Android) and download the application.

2. Prepare the Lamp for Pairing

Plug the lamp into a power outlet. To enter pairing mode, the lamp needs to flash rapidly (0.5 seconds per flash). If it's not flashing rapidly, you may need to cycle the power three times:

1. Plug in the lamp, wait for it to turn on.
2. Unplug, then plug in again.
3. Unplug, then plug in again.
4. Unplug, then plug in for the third time. The lamp should now flash rapidly.

Important: The lamp only supports 2.4 GHz Wi-Fi networks. Ensure your smartphone is connected to a 2.4 GHz network during the pairing process.

3. Add Device in Smart Life App

1. Open the Smart Life app and log in or register.
2. Tap the "+" icon in the top right corner to add a device.
3. Select "Lighting" > "Light Source (BLE+Wi-Fi)" or similar option for smart lighting.
4. Confirm that the lamp is flashing rapidly.
5. Enter your 2.4 GHz Wi-Fi network password.
6. The app will begin searching for the device. Wait for the connection to complete. This may take a few moments.

4. Voice Control Integration (Alexa/Google Home)

Once connected to the Smart Life app, you can link it to Amazon Alexa or Google Home:

1. Open the Alexa or Google Home app.
2. Go to "Skills & Games" (Alexa) or "Works with Google" (Google Home).
3. Search for "Smart Life" and enable the skill/service.
4. Link your Smart Life account when prompted.
5. Discover devices. Your Bomcosy LED Floor Lamp should now appear and be controllable via voice commands.

OPERATING THE LAMP

Your lamp offers multiple control methods:

1. On-Lamp Touch Controls



This image highlights the physical control buttons and USB port on the lamp's pole.

- **Power Button (Top):** Short press to turn ON/OFF. Long press to initiate fast flashing for app connection.
- **Touch Sensor (Middle):** Short press to switch between colors or modes. Press and hold to adjust brightness.
- **USB Port (Bottom):** 5V/1A output for charging small devices.

2. Smart Life App Control

The Smart Life app provides comprehensive control over your lamp:



This image displays the lamp and the Smart Life app interface, illustrating color and brightness adjustments.

- **Color Selection:** Choose from a full spectrum of RGB colors or various shades of white (warm white 3000K, daylight white 6000K).
- **Brightness Adjustment:** Dim or brighten the light to your desired level.
- **Scene Modes:** Select from pre-set scenes (e.g., Night, Read, Meeting, Leisure, Soft, Rainbow, Shine, Gorgeous) or create custom ones.
- **Music Sync:** Synchronize the light effects with music.
- **Timer Function:** Set schedules for the lamp to automatically turn on or off.

3. Voice Control

Use voice commands with Amazon Alexa or Google Home after successful integration:

- "Alexa, turn on the [Lamp Name]."
- "Hey Google, set [Lamp Name] to blue."
- "Alexa, dim [Lamp Name] to 50%."
- "Hey Google, turn off the [Lamp Name]."

CARE AND MAINTENANCE

- Ensure the lamp is unplugged before cleaning.
- Wipe the lamp with a soft, dry cloth. Do not use abrasive cleaners or solvents.
- Avoid getting moisture into any electrical components.

TROUBLESHOOTING

Lamp Not Turning On

- Check if the power adapter is securely plugged into both the lamp and the wall outlet.
- Ensure the wall outlet is functional by testing it with another device.
- Verify that all pole sections are correctly assembled and internal wiring connectors are firmly connected.

Cannot Connect to Wi-Fi / App

- Ensure your Wi-Fi network is 2.4 GHz. The lamp does not support 5 GHz networks.
- Confirm your smartphone is connected to the 2.4 GHz Wi-Fi network during pairing.
- Make sure the lamp is in fast flashing mode (0.5 seconds per flash). If not, cycle the power three times (unplug/plug three times) to enter pairing mode.
- Check your Wi-Fi password for accuracy.
- Move the lamp closer to your Wi-Fi router during the initial setup.
- Restart your router and try the pairing process again.

Voice Control Not Working

- Ensure the Smart Life skill/service is enabled and linked correctly in your Alexa or Google Home app.
- Verify that the lamp is online and controllable via the Smart Life app.
- Try rediscovering devices in your Alexa or Google Home app.
- Use the exact name you assigned to the lamp in the Smart Life app for voice commands.

PRODUCT SPECIFICATIONS

Feature	Specification
Brand	Bomcosy
Model	FLD-025-F2-C58-K1
Dimensions (L x W x H)	25 x 25 x 168 cm
Weight	4.5 Kilograms
Material	Plastic, Metal (Base)
Color	Black

Feature	Specification
Input Voltage	240 Volts
Power Consumption	25 Watts
Luminous Flux	2000 lm
Color Temperature	RGBW (3000K Warm White, 6000K Daylight White)
Color Rendering Index (CRI)	80.00
Average Lifespan	30000 Hours
Special Features	Dimmable, Timer, Smart Control (App, Voice), USB Charging Port
IP Rating	IP20 (Indoor Use Only)
Energy Label	F (25 kWh/1000h) EPREL Link

WARRANTY AND SUPPORT

The Bomcosy LED Floor Lamp comes with a comprehensive **2-year warranty** from the date of purchase.

If you encounter any issues or have questions regarding your product, please contact Bomcosy customer support. Refer to your purchase documentation or the Bomcosy website for contact details.