

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

- › [RL LIVE YOUR LIGHT](#) /
- › [Reality Leuchten R62793132 Venida LED Ceiling Light User Manual](#)

RL LIVE YOUR LIGHT R62793132

Reality Leuchten R62793132 Venida LED Ceiling Light User Manual

Model: R62793132

1. INTRODUCTION

Thank you for purchasing the Reality Leuchten R62793132 Venida LED Ceiling Light. This modern and original ceiling fixture is designed to complement various interior styles and enhance your living space. It features integrated LED technology for high light quality and energy efficiency, along with a SWITCH dimmer function for adjustable brightness. Please read this manual carefully before installation and operation to ensure safe and correct use of the product. Keep this manual for future reference.

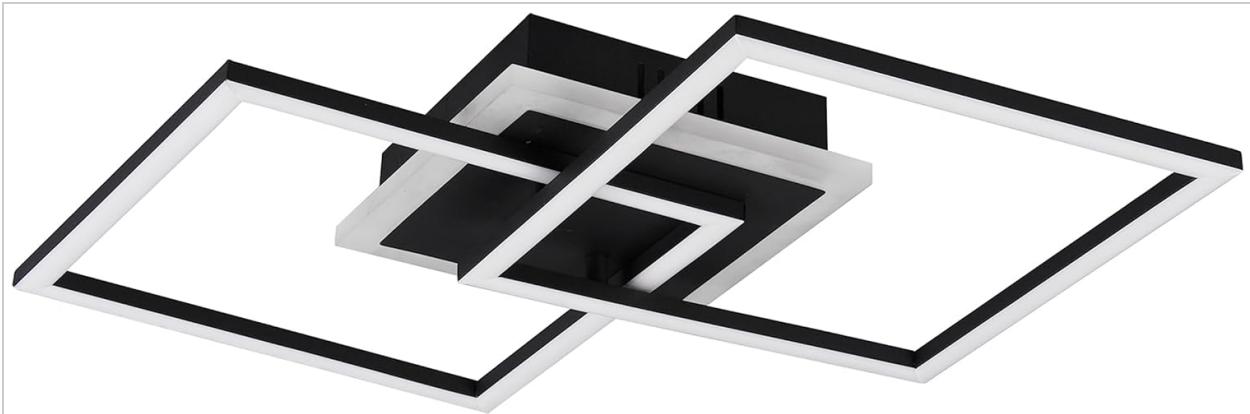


Figure 1.1: The Reality Leuchten R62793132 Venida LED Ceiling Light, showcasing its modern square design in matte black.

2. SAFETY INSTRUCTIONS

Always observe the following safety precautions to prevent injury or damage:

- **Electrical Safety:** Installation must be performed by a qualified electrician or a person with appropriate electrical knowledge to ensure compliance with local wiring regulations.
- **Power Disconnection:** Before any installation, maintenance, or cleaning, always disconnect the power supply at the main circuit breaker or fuse box.
- **Voltage:** Ensure the supply voltage matches the voltage specified on the product label (240 Volts).
- **Mounting Surface:** The mounting surface must be capable of supporting the weight of the fixture.

- **Integrated LED:** The LED light source in this fixture is not replaceable. Do not attempt to open or modify the LED module.
- **IP20 Rating:** This product has an IP20 rating, meaning it is protected against solid objects larger than 12.5mm but has no protection against water. It is suitable for indoor use only in dry environments.
- **Cleaning:** Use a dry, soft cloth for cleaning. Do not use abrasive cleaners or solvents.

3. PACKAGE CONTENTS

Carefully unpack the box and ensure all components are present and undamaged. If any parts are missing or damaged, contact your retailer immediately.

- 1x Reality Leuchten R62793132 Venida LED Ceiling Light fixture
- 1x Mounting hardware kit (screws, wall plugs)
- 1x Instruction Manual

4. SETUP AND INSTALLATION

Follow these steps for safe and proper installation of your ceiling light.

1. Prepare for Installation:

- Turn off the main power supply to the installation area at the circuit breaker.
- Ensure the power is off by using a voltage tester.

2. Mark Mounting Points:

- Position the mounting bracket (usually attached to the fixture base) against the ceiling at the desired installation location.
- Mark the drilling points for the screws.

3. Drill Holes and Install Wall Plugs:

- Drill holes at the marked points using an appropriate drill bit for your ceiling material.
- Insert the provided wall plugs into the drilled holes.

4. Secure Mounting Bracket:

- Attach the mounting bracket to the ceiling using the screws provided. Ensure it is securely fastened.

5. Electrical Connection:

- Connect the household electrical wires to the terminals on the fixture. Typically, this involves connecting Live (L), Neutral (N), and Earth (E) wires. Refer to the wiring diagram in the included manual for specific connections.
- Ensure all connections are tight and secure.

6. Attach the Fixture:

- Carefully attach the main light fixture body to the secured mounting bracket. Follow the specific mechanism (e.g., twisting, screwing, or clipping) as indicated in the detailed manual.

7. Restore Power:

- Once the fixture is securely installed and wired, restore power at the main circuit breaker.
- Test the light to ensure it functions correctly.

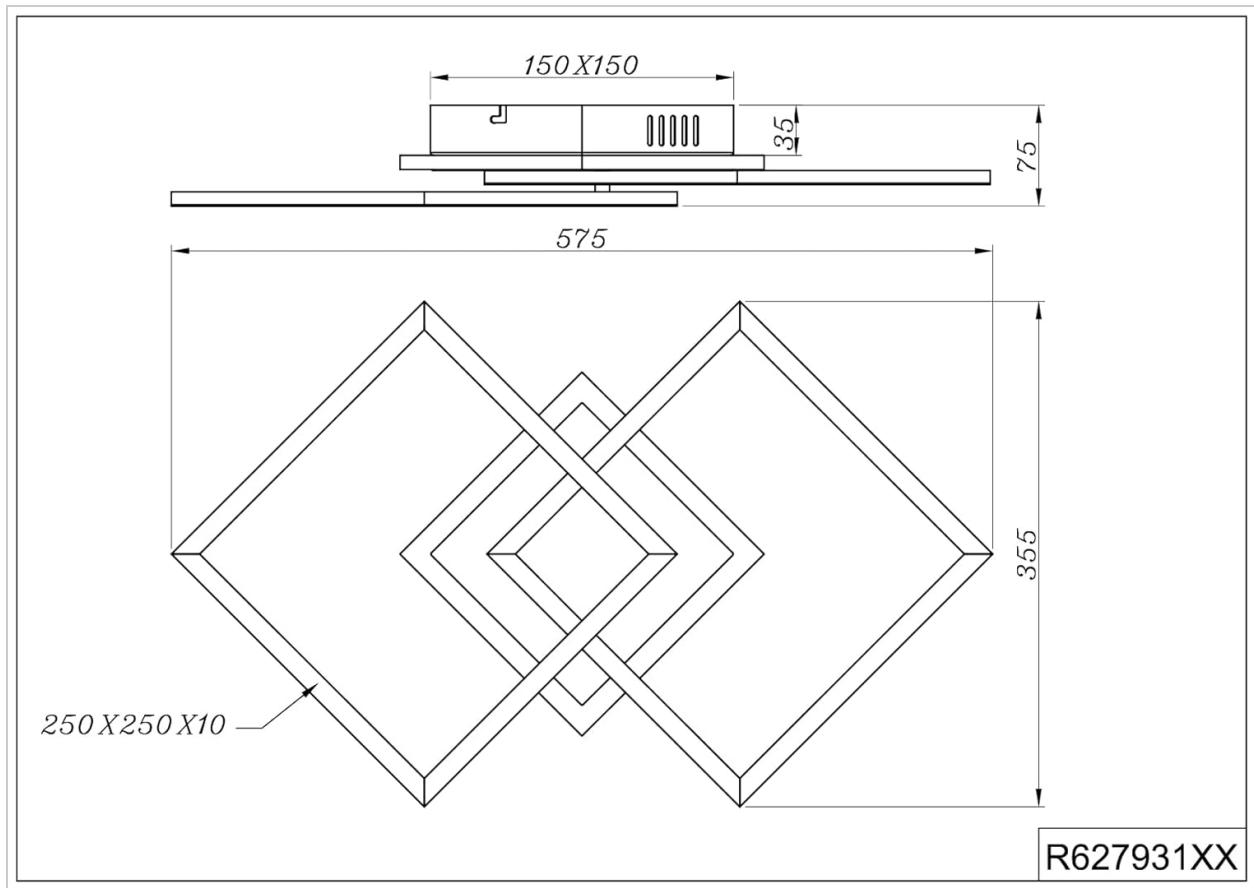


Figure 4.1: Technical drawing showing the dimensions of the R62793132 Venida LED Ceiling Light. Dimensions are approximately 57.5 cm (length) x 35.5 cm (width) x 7.5 cm (height).

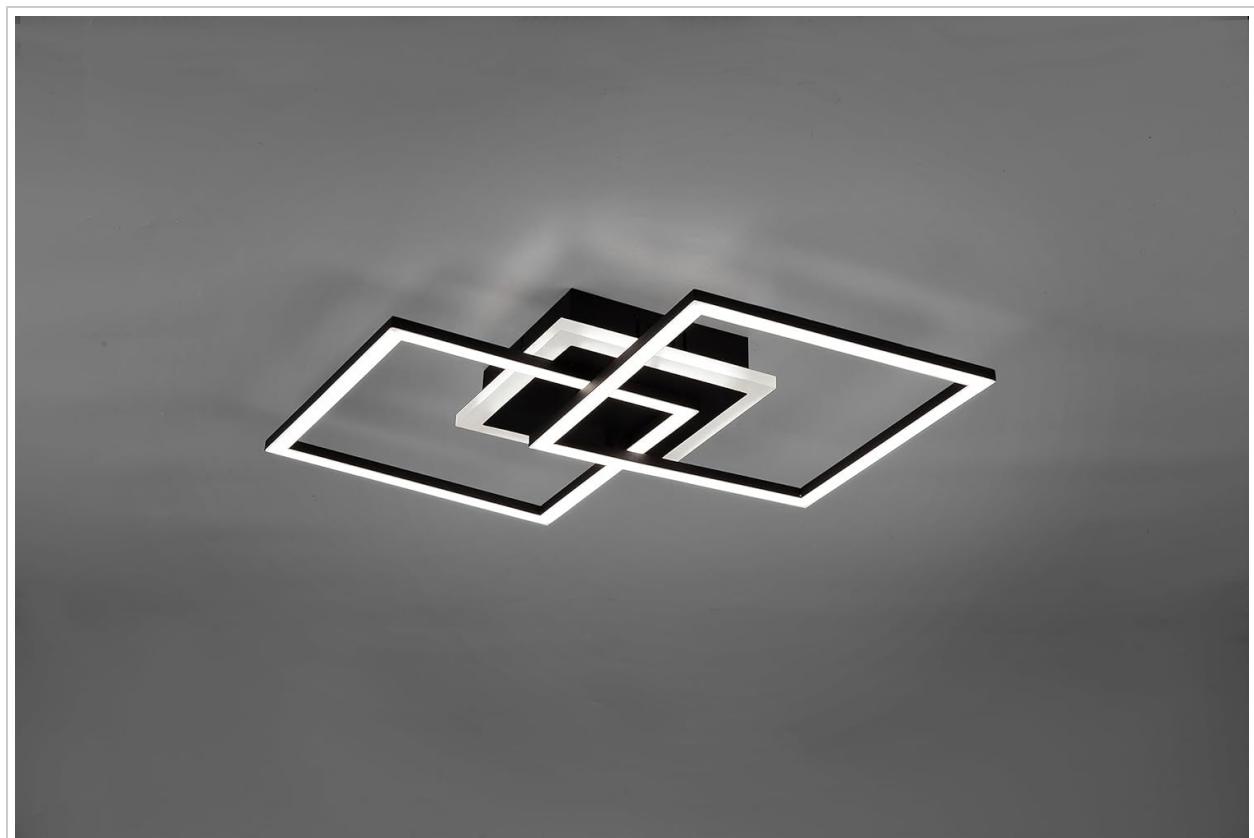


Figure 4.2: The Venida LED Ceiling Light installed, demonstrating its appearance when mounted.

5. OPERATING INSTRUCTIONS

The Reality Leuchten R62793132 Venida LED Ceiling Light features an integrated SWITCH dimmer function, allowing you to adjust the brightness using a standard wall light switch. No external dimmer is required.

- **Turning On/Off:** Use your standard wall light switch to turn the light on or off.
- **Adjusting Brightness (SWITCH Dimmer):**
 - **100% Brightness:** Turn the light switch ON. The light will illuminate at full brightness.
 - **50% Brightness:** Turn the light switch OFF, then immediately ON again (within 1-2 seconds). The light will switch to 50% brightness.
 - **25% Brightness:** Turn the light switch OFF, then immediately ON again (within 1-2 seconds) while the light is at 50% brightness. The light will switch to 25% brightness.
 - To cycle back to 100% brightness, turn the light switch OFF and then ON again.



Figure 5.1: Diagram explaining the SWITCH dimmer functionality. One click for 100% brightness, two clicks for 50%, and three clicks for 25% brightness using a standard wall switch. For more information, visit trio-lighting.com/switchdimmer.

6. MAINTENANCE

The Reality Leuchten R62793132 Venida LED Ceiling Light requires minimal maintenance.

- **Cleaning:** Ensure the power is off before cleaning. Wipe the fixture with a soft, dry, or slightly damp cloth. Do not use harsh chemicals, abrasive cleaners, or solvents, as these can damage the finish or electrical components.
- **LED Light Source:** The LED light source is integrated and designed for a long lifespan (approximately 25,000 hours). It is not user-replaceable. If the LED fails, the entire fixture may need to be replaced.

7. TROUBLESHOOTING

If you encounter issues with your ceiling light, refer to the following common problems and solutions:

- **Light Does Not Turn On:**

- Check if the main power supply to the fixture is on.
- Verify that the wall switch is in the ON position.
- Inspect electrical connections for looseness or damage (ensure power is off before inspection).
- If the issue persists, consult a qualified electrician.

- **Light Flickers or Dims Unexpectedly:**
 - Ensure the SWITCH dimmer function is not being accidentally triggered by rapid on/off cycles.
 - Check for stable power supply to your home.
 - If flickering continues, consult a qualified electrician.
- **Light is Not Bright Enough:**
 - Use the SWITCH dimmer function to cycle through brightness levels (100%, 50%, 25%) to ensure it is set to your desired level.

8. SPECIFICATIONS

Feature	Specification
Brand	RL LIVE YOUR LIGHT
Manufacturer	Reality Leuchten
Model Number	R62793132
Product Dimensions (L x W x H)	35.5 x 57.5 x 7.5 cm
Item Weight	1.06 Kilograms
Style	Square
Color	Matte Black
Material	Plastic, Metal
Finish Type	Painted
Number of Bulbs	1 (Integrated LED)
Voltage	240 Volts
Specific Uses	Kitchens, Indoor Use
Special Features	Dimmable (SWITCH Dimmer)
Shade Color	Warm White
Shade Material	Metal
Power Source Type	Corded Electric
Switch Style	Dimmer (Integrated)
Installation Type	Ceiling Mount

Feature	Specification
Batteries Required	No
Certification	IP20, E (Energy Efficiency Class)
Bulb Type	LED
Luminous Flux	3000 lm
Wattage	25 Watts
Average Lifespan	25,000 hours

9. WARRANTY AND SUPPORT

For warranty information, please refer to the terms and conditions provided by your retailer at the time of purchase. Reality Leuchten products are designed for durability and performance.

Spare parts availability information is not explicitly provided. For technical support, product inquiries, or assistance with installation, please contact your point of purchase or the manufacturer directly. Keep your purchase receipt as proof of purchase.

© 2023 RL LIVE YOUR LIGHT. All rights reserved.

Related Documents - R62793132

 <p>AA-NL-1920000X</p>	<p>Reality Gamma LED Ceiling Light - User Manual and Features</p> <p>Comprehensive guide to the Reality Gamma LED Ceiling Light, covering operation with and without remote control, features, and technical specifications. Includes multilingual instructions and compliance information.</p>
 <p>AA-NL-1921719XX</p>	<p>RL R621719XX LED Ceiling Light: User Manual and Operation Guide</p> <p>Detailed instructions for the RL R621719XX LED ceiling light, including installation, operation via wall switch and remote control, technical specifications, and safety information. Features adjustable brightness and color temperature.</p>

