

Mackie ProFX12v3

Mackie ProFX12v3 12-Channel Professional Effects Mixer with USB - User Manual

Model: ProFX12v3

INTRODUCTION

The Mackie ProFX12v3 is a 12-channel professional effects mixer designed for a wide range of audio applications, including live sound, home recording, and content creation. It integrates high-quality Onyx microphone preamplifiers, a versatile GigFX effects engine, and a 2x4 24-bit/192kHz USB audio interface. This manual provides essential information for setting up, operating, and maintaining your ProFX12v3 mixer.

SETUP

Proper setup ensures optimal performance and longevity of your mixer. Follow these steps for initial configuration.

1. Power Connection

- Ensure the mixer's power switch is in the OFF position.
- Connect the supplied AC power cord to the mixer's power inlet and then to a suitable AC power outlet.

2. Input Connections

Connect your microphones, instruments, and other audio sources to the appropriate input channels.

- **Microphones:** Use XLR cables to connect microphones to the XLR inputs (channels 1-7).
- **Line-Level Devices:** Connect instruments or other line-level sources using 1/4-inch TRS or TS cables to the 1/4-inch inputs. Channels 1-2 also feature Hi-Z switches for direct instrument connection.
- **Stereo Inputs:** Channels 5/6, 7/8, 9/10, and 11/12 are stereo line inputs, suitable for keyboards, media players, or other stereo sources.

3. Output Connections

Connect your main speakers, monitors, and headphones.

- **Main Outputs:** Connect your main PA system or recording interface to the Main XLR or 1/4-inch outputs.
- **Monitor Sends:** Use the Mon Send output to connect to stage monitors.
- **Headphones:** Connect headphones to the 1/4-inch headphone jack.

4. USB Connection

Connect the mixer to your computer for recording and playback.

- Connect a USB cable from the mixer's USB port to an available USB port on your computer.
- The ProFX12v3 is a class-compliant device, meaning it generally does not require special drivers for basic functionality on most operating systems.



Figure 1: Rear panel connections of the Mackie ProFX12v3 mixer. This view highlights the power input, USB port for computer connectivity, and main audio outputs including XLR and 1/4-inch jacks.

OPERATING INSTRUCTIONS

This section details the functions of the various controls on your ProFX12v3 mixer.



Figure 2: Top panel overview of the Mackie ProFX12v3 mixer. This image displays the layout of input channels, the master section, and the GigFX effects engine controls.

1. Channel Strip Controls (Channels 1-12)

- **Gain Knob:** Adjusts the input sensitivity for the connected microphone or line-level device. Set this to achieve a strong signal without clipping (indicated by the OL LED).
- **Low Cut Button (100Hz):** Engages a high-pass filter at 100 Hz to remove unwanted low-frequency rumble.
- **EQ (Equalizer):**
 - **High:** Adjusts treble frequencies.
 - **Mid:** Adjusts mid-range frequencies.
 - **Low:** Adjusts bass frequencies.

- **Comp (Compressor) Knob:** (Channels 1-4 only) Applies compression to control dynamic range.
- **Aux (Monitor) Knob:** Controls the amount of signal sent to the Mon Send output for stage monitors.
- **FX Knob:** Controls the amount of signal sent to the GigFX effects engine.
- **Pan Knob:** Positions the channel's signal in the stereo field (left to right).
- **Mute Button:** Silences the channel's output to the main mix, subgroups, and FX send.
- **Solo/PFL Button:** Sends the channel's signal to the headphones/control room for monitoring without affecting the main mix.
- **Channel Fader:** Adjusts the overall volume level of the channel in the main mix.

2. Phantom Power (48V)

- The 48V phantom power button globally supplies power to all XLR microphone inputs.
- Activate this only when using condenser microphones that require phantom power. Ensure dynamic microphones are not damaged by phantom power, or disconnect them before activation.

3. GigFX Effects Engine

- **Presets Knob:** Rotates to select from 24 different built-in effects (reverbs, delays, choruses, etc.). The selected effect number is displayed.
- **FX Level Knob:** Adjusts the overall output level of the effects engine into the main mix.
- **FX Mute Button:** Mutes the effects output.

4. Main Mix and Output Controls

- **Main Faders (L/R):** Control the overall volume of the stereo main mix.
- **Sub 1-2 Fader:** Controls the volume of the subgroup output. Channels can be routed to this subgroup using their 1-2 button.
- **Phones/Control Room Level Knob:** Adjusts the volume for the headphone output and control room outputs.
- **USB 1-2 Blend Knob:** Blends the USB 1-2 input from your computer with the mixer's output for monitoring.

MAINTENANCE

Regular maintenance helps preserve the functionality and appearance of your ProFX12v3 mixer.

- **Cleaning:** Use a soft, dry cloth to wipe down the mixer's surface. For stubborn dirt, a slightly damp cloth with mild soap can be used, followed by a dry cloth. Avoid abrasive cleaners or solvents.
- **Dust Protection:** When not in use, cover the mixer to prevent dust accumulation, which can affect faders and knobs.
- **Storage:** Store the mixer in a cool, dry environment away from direct sunlight and extreme temperatures.
- **Cable Management:** Ensure cables are not excessively bent or strained, as this can lead to damage over time.

TROUBLESHOOTING

This section addresses common issues you might encounter with your ProFX12v3 mixer.

No Sound Output

- Check that the mixer is powered on and the power LED is illuminated.
- Verify that all input and output cables are securely connected.
- Ensure channel faders, main faders, and the Phones/Control Room level knob are raised.
- Check that no Mute buttons are engaged on active channels or the FX engine.
- Confirm that your speakers or headphones are connected and powered on, with their volume turned up.

Distorted or Unclear Sound

- Adjust the Gain knob on the input channel to prevent the "OL" (Overload) LED from lighting up consistently.
- Check the EQ settings; extreme adjustments can cause distortion.
- Ensure the output levels (Main Faders, Mon Send) are not set too high, causing clipping in connected devices.

Hum or Noise

- Verify all cables are in good condition and properly shielded.
- Ensure proper grounding for all audio equipment.
- Engage the Low Cut button on channels with low-frequency noise sources.
- Keep audio cables away from power cables to minimize interference.

USB Audio Issues (Recording/Playback)

- Ensure the USB cable is securely connected to both the mixer and the computer.
- Verify that the ProFX12v3 is selected as the input/output device in your computer's sound settings and your Digital Audio Workstation (DAW) software.
- On macOS, the ProFX12v3 is class-compliant. For advanced routing or specific issues, consult your DAW's documentation or Mackie's support resources for potential software solutions or workarounds, especially concerning routing computer audio to specific mixer channels.
- On Windows, ensure any necessary drivers are installed (check Mackie's website for the latest drivers if required).






SPECIFICATIONS


Feature	Detail
Model	ProFX12v3
Number of Channels	12
Microphone Preamps	7 x Onyx Preamps
Effects Engine	GigFX (24 effects)
USB Audio Interface	2x4, 24-bit/192kHz
Phantom Power	48V (global)
Equalization	3-band EQ on all channels, 100Hz low-cut filter
Compression	On channels 1-4
Item Weight	11.75 pounds (5.34 kg)
Product Dimensions	4 x 9 x 14 inches
Connectivity Technology	USB
Power Source	Corded Electric

WARRANTY AND SUPPORT


For detailed warranty information, please refer to the warranty card included with your product or visit the official Mackie website. For technical support, product registration, or to download the latest drivers and software, please visit the [Mackie Brand Store](#) or the main Mackie support portal.

Related Documents - ProFX12v3

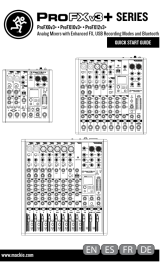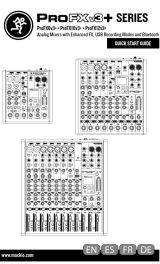	Mackie ProFXv3+ Series Analog Mixers: Enhanced FX, USB, Bluetooth Explore the Mackie ProFXv3+ Series, professional analog mixers featuring enhanced GigFX+ effects, a 24-Bit/192kHz USB-C audio interface, and bi-directional Bluetooth. Ideal for studio recording, live sound, and streaming, these mixers offer award-winning Onyx preamps and intuitive controls.
	Mackie ProFXv3 Series Effects Mixer with USB Owner's Manual Comprehensive owner's manual for the Mackie ProFXv3 Series Effects Mixers with USB, detailing features, setup, operation, technical specifications, and troubleshooting for live sound, home recording, and content creation.
	Mackie ProFXv3 Series Professional Effects Mixer with USB Owner's Manual Comprehensive owner's manual for the Mackie ProFXv3 Series Professional Effects Mixers with USB, detailing features, setup, operation, and technical specifications for live sound, home recording, and content creation.
	Mackie ProFXv3+ Series Analog Mixers: Quick Start Guide A concise guide to the Mackie ProFXv3+ Series Analog Mixers, covering setup, features, and safety instructions for models like the ProFX6v3+, ProFX10v3+, and ProFX12v3+. Learn about enhanced effects, USB recording, and Bluetooth connectivity.
	Mackie ProFXv3+ Series Analog Mixers Quick Start Guide A quick start guide for the Mackie ProFXv3+ Series of analog mixers, covering models ProFX6v3+, ProFX10v3+, and ProFX12v3+. This guide details setup, safety instructions, and front/rear panel descriptions for enhanced effects, USB recording, and Bluetooth connectivity.

	Mackie PPM1012 12-Channel Professional Powered Mixer Owner's Manual Comprehensive owner's manual for the Mackie PPM1012 12-Channel, 2 x 800W Professional Powered Mixer, covering setup, features, connections, safety instructions, and hookup diagrams.
---	---


Documents - Mackie – ProFX12v3

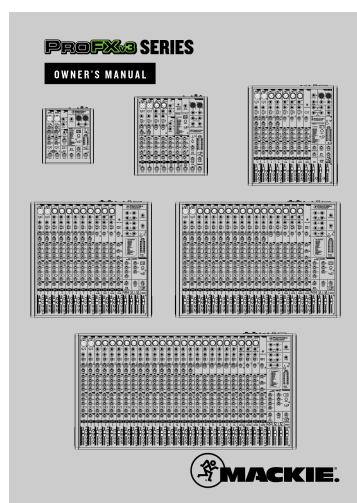

[Mackie ProFXv3 Series Professional Effects Mixer with USB Owner's Manual](#)

Comprehensive owner's manual for the Mackie ProFXv3 Series Professional Effects Mixers with USB, detailing features, setup, operation, and technical specifications for live sound, home recording, and content creation.

lang:i-klngon **score:38** filesize: 9.98 M page_count: 42 document date: 2023-10-12

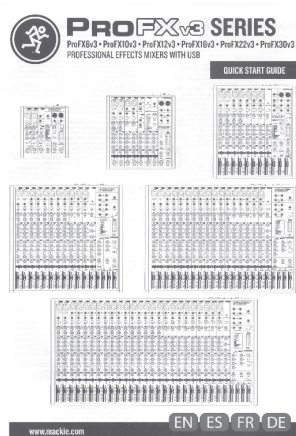

[\[pdf\] User Manual Owner's Manual Installation Guide Instructions Guide](#)

863PFX10V3 Mackie ProFX 10 V3 CH Mixer with Effects USB CRUTCHFIELD COM HNEWBERRY


ProFX12v3 owner s manual 12 channel mixer — effects compression and connection at Crutchfield
crutchfieldonline ImageBank v20191023104700 Manuals 863 |||

if PAD-- SERIES ProFX6v3 ProFX10v3 ProFX12v3 ProFX16v3 ProFX22v3

ProFX30v3 PROFESSIONAL EFFECTS MIXERS WITH USB OUICK START GUIDE

- n III m I Important Safety Instructions - II ::, I. Read these instructions. ::c 2. Keep these instructions. I - 3. Heed all warnings. i 4. Follow...

lang:en **score:35** filesize: 11.28 M page_count: 31 document date: 2019-10-23

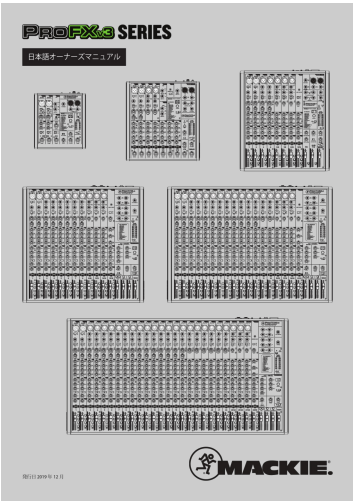


[pdf] User Manual

tempfile 10000038 indd ProFXv3 Manual JP rev2 mackie jp

USB 3-4 USB 3-4 USB 1-2 USB 1-2 MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE
LINE IN 3 LINE IN 4 ... 3 XLR CD ProFXv3 ProFXv3 TIPS 8. ProFXv3 9. GAIN LED
10. L-R ProFX12v3/ProFX16v3/ ProFX22v3/ProFX30v3U 11. P.2 12. 7 10 6 ProFXv3
Professional...


lang:i-klngon score:34 filesize: 10.17 M page_count: 44 document date: 2019-12-24

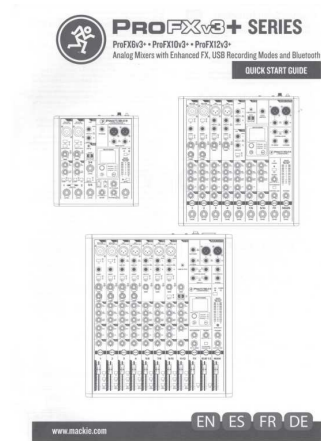

Mackie ProFXv3+ Series Analog Mixers: Enhanced FX, USB, Bluetooth

Explore the Mackie ProFXv3+ Series, professional analog mixers featuring enhanced GigFX+ effects, a 24-Bit/192kHz USB-C audio interface, and bi-directional Bluetooth. Ideal for studio recording, live sound, and streaming, these mixers offer award-winning Onyx preamps and intuitive controls.

lang:en score:32 filesize: 20.32 M page_count: 81 document date: 2024-02-29


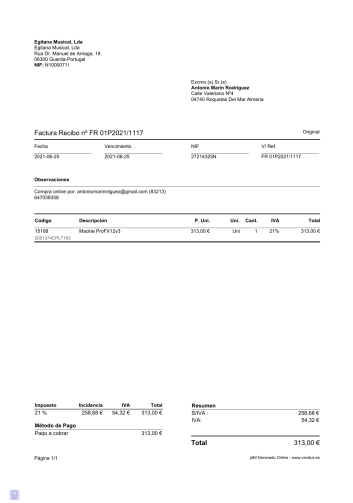


[pdf]

user 32721 factura mackie profx12v3 Index of img file receipt upload |||

Egitana Musical, Lda Egitana Musical, Lda Rua Dr. Manuel de Arriaga, 18 06300
Guarda-Portugal NIF: N ... por: antoniomarinrdguez gmail.com 83213 647038358
Cdigo 15188 2051374CPLT163 Descripcin Mackie ProFX12v3 NIF 27214325N
Original V/ Ref. FR 01P2021/1117 P. Uni. 313,00 Uni. Cant. Uni 1 IVA...


lang:es score:32 filesize: 90.11 K page_count: 3 document date: 2021-06-25

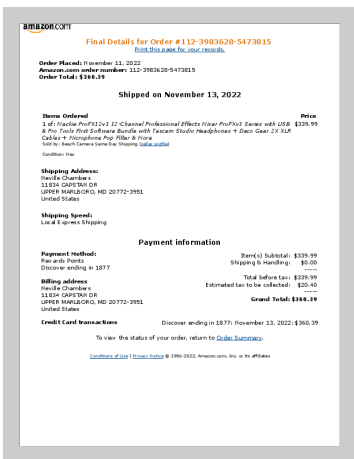



[\[pdf\]](#) Instructions Guide


Download Product Guide Pro Audio Equipment Amber Tech May2020 hsCtaTracking ae94fb60 29f2 4198 b2b0 0d0a294e4524 91614987 9567 4ccc b507 276de51ed140 cdn2 hubspot net hubfs 315136 ||| Product Code RA-LONDON-8-BK RA-LONDON-10-GR Description Acoustic Treatment The Broadway London 8 r ... oth ProTools First and Waveform™ OEM recording software/plugin packages are included. The Mackie ProFX12v3 12-Channel Professional Effects Mixer with USB is the ultimate affordable solution for liv... lang:en score:26 filesize: 434.46 K page_count: 9 document date: 2020-04-29

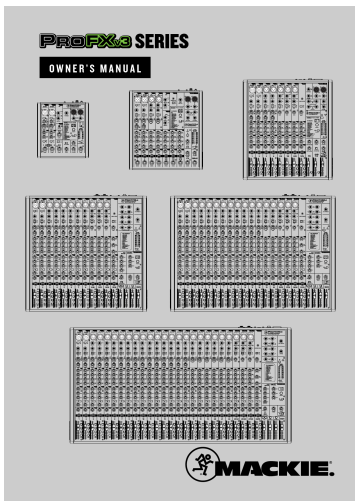

[\[pdf\]](#) User Manual Owner's Manual

Untitled ManualMACKIE PROFX12V3 12 USB LiveForSoundMACKIE ProFX12v3 Manual liveforsoundliveforsound product 2024 10 MACKIE liveforsound ||| OWNER S MANUAL USB 3-4 USB 3-4 USB 1-2 USB 1-2 MUTE MUTE MUTE MUTE MUTE MUTE MUTE LINE IN 3 LINE IN 4 USB 3-4 MIC GAI N LEVEL SET MIC GAI N LEVEL SET MIC GAI N LEVEL SET U 60 GAIN U 60 GAIN U 60 GAIN MUTE MUTE MUTE MUTE MUTE MUTE MUTE USB 1-2 BLEND TO PHONES/... lang:i-klngon score:26 filesize: 8.4 M page_count: 43 document date: 2024-10-15

[\[pdf\]](#) Quick Start Guide Installation Guide Instructions Guide

SERIES MACKIEE S USB Un interface 2x4 que le permite enviar audio a y desde el mezclador través de un ordenador 41 Interruptor 3 4 La activación este interruptor ProFXv3 plus Quick Start Guidemackieimg file resources ProFXv3 Guide srsItid AfmBOooWI X6HG89cD4bR mXca3GHLNGerF60M ewAEQqly8 4sRaBxP MACKIESERIES interruptor 13 Ecuálización Realzan o cortan nivel determinadas frecuencias para intensificar sonido 14 mando FX GuideProFXv3 4sRaBxPmackie AfmBOoqXNfvgM1YPsQXWh2dGpo37WiHf0yRvpZHAbeVyofofmLXLnz zx interruptor PONERSE EN CONTACTO con departamento soporte técnico ES FR DE GARANTIE ET ASSISTANCE TECHNIQUE Consultez MACKIE COM pourProFXv3 zxmackie AfmBOooW5Xe7Ksa55H3Oqwt40tQESYmKJdpNzCYW WqKFbisTUR91D8o interruptor Read these instructions 2 Keep Heed all warnings Follow 5 Do not use this apparatus near waterPONERSE

AfmBOoqFLcK3nR7Bidj7pwP1UKy7hSt30gg5RnatNRMu3BjqtWYH9yMPmackie pourLow Cut Taste
Bedämpft Bassfrequenzen unter 100 Hz mit einer Flankensteilheit von 18 dB pro Oktave 10 Gain steuert
die Mic Line EingangsempfindlichkeitProFXv3 WqKFbisTUR91D8omackie

[illegible]

SERIES ProFX6v3 ProFX10v3 ProFX12v3 Analog Mixers with Enhanced FX, USB
Recording Modes and Bluetooth QUICK START GUIDE MUTE MUTE MUTE MUTE
MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE MUTE
MUTE MUTE MUTE MUTE www.mackie.com EN ES FR DE ProFXv3 Analog Mixers
W...

lang:en score:25 filesize: 2.33 M page_count: 16 document date: 2023-09-22



[\[pdf\]](#)

ProFXv3 One sheet RevA September2019 4pg jp L K Ichitani INCLUDED! web mackie |||


USBMackie ProFXv3 6 60dB Onyx™ Mackie GigFXTM 24 24Bit/192kHz 2x4 USB

I/O ProTools First ... Onyx2 24/ GigFX 2EQ 80Hz / 12kHz :ch1/ch2 Hi-Z ch100Hz48v

ch3/ch4 /USB3-4: ch5/ch6 ProFX12v3 12ch/USB 60dB Onyx7 24/ GigFX 3EQ : ch510

Hi-Z ch100Hz48v /USB3-4: ch11/ch1...


lang:en score:25 filesize: 2.17 M page count: 4 document date: 2019-09-13

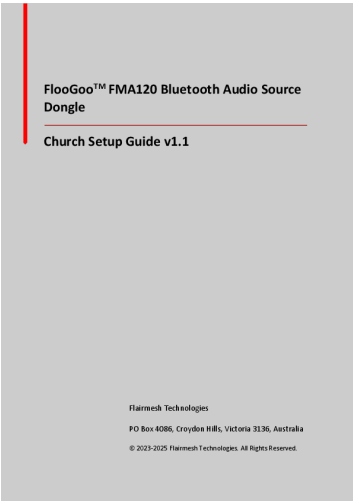

[Floogoo FMA120 Bluetooth Audio Source Dongle: Church Setup Guide](#)

A comprehensive setup guide for the Floogoo FMA120 Bluetooth Audio Source Dongle, detailing its use as an Auracast transmitter and receiver in church environments. Covers quick start, app configuration, firmware updates, and troubleshooting.

lang:en **score:24** filesize: 1.12 M page_count: 14 document date: 2025-09-09

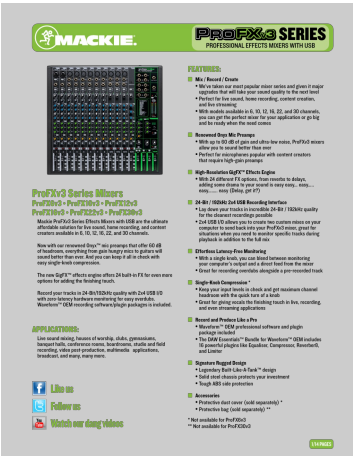

[\[pdf\] Datasheet](#)


Untitled Data SheetMACKIE PROFX12v3 12 USB

LiveForSoundMACKIE ProFX12v3 datasheet liveforsoundliveforsound product 2024 10 MACKIE

liveforsound |||

PROFESSIONAL EFFECTS MIXERS WITH USB ProFXv3 Series Mixers ProFX6v3 ProFX10v3 ProFX12v3 ProFX16v3 ProFX22v3 ProFX30v3 Mackie ProFXv3 Series Effects Mixers with USB are the ultimate affordable solution for live sound, home recording, and content creators available in 6, 10, 12, 16, 22, and 30 channel...

lang:en **score:24** filesize: 2.56 M page_count: 14 document date: 2024-10-15

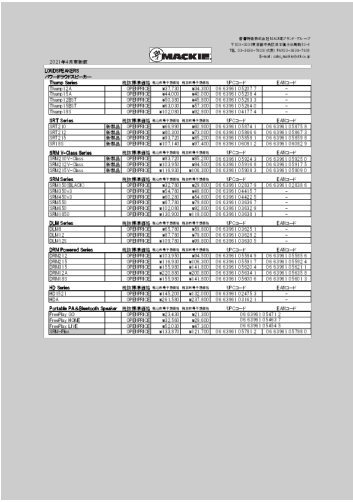


[\[pdf\]](#)

MACKIE Dealer Price 202104 xls K Ichitani price mackie jp 80

20214 LOUDSPEAKERS Thump Series Thump12A Thump15A Thump12BST Thump15BST Thump18S OPENPRICE 3 ... I/O ProFXv3Series ProFX6v3 OPENPRICE 20,130 18,300 ProFX10v3 OPENPRICE 30,800 28,000 ProFX12v3 OPENPRICE 40,150 36,500 ProFX16v3 OPENPRICE 66,990 60,900 ProFX22v3 OPENPRICE 93...

lang:i-klngon **score:24** filesize: 89.86 K page_count: 8 document date: 2021-04-20

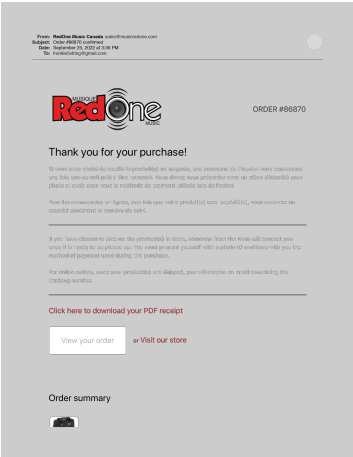

[\[pdf\]](#)


Order 86870 confirmed user 34337 iemandmixermackie Index of img file receipt upload mackie |||

From: RedOne Music Canada sales musicredone.com Subject: Order #86870

confirmed Date: September 25, ... Click here to download your PDF receipt View your order or Visit our store Order summary Mackie **PROFX12V3** Carry Bag 1 64.99

Mackie **PROFX12V3** Carry Bag 1 64.99 Mackie **PROFX12V3** 12-Channel ...

lang:en **score:24** filesize: 795.68 K page_count: 3 document date: 2022-10-01

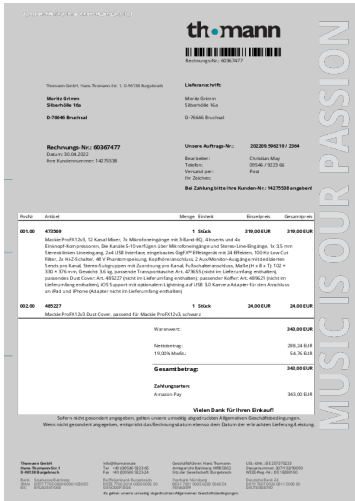

[pdf]

Rechnung 60367477 Thomann GmbH user 31715 re Index of img file receipt upload mackie |||


#_ AppendFile2 k: pdfmaschine vorlagen agb.pdf _# Rechnungs-Nr.: 60367477

Thomann GmbH, Hans-Thoma ... el Menge Einheit Einzelpreis Gesamtpreis 001.00

473569 1 Stck 319,00 EUR 319,00 EUR Mackie ProFX12v3, 12 Kanal Mixer, 7x

Mikrofoneingnge mit 3-Band-EQ, 4 Inserts und 4x Einknopf-Kompressoren,...

lang:de score:24 filesize: 52.04 K page_count: 1 document date: 2022-04-30

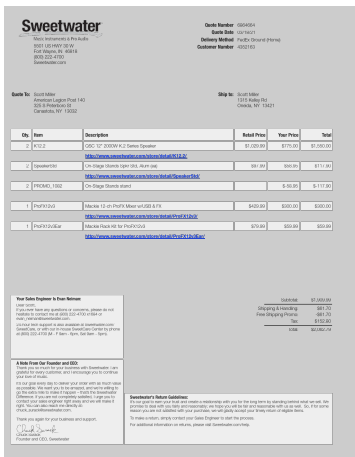

[pdf]

user 31949 sweetwater quote 6864664 Index of img file receipt upload mackie |||

5501 US HWY 30 W Fort Wayne, IN 46818 800 222-4700 Sweetwater.com Quote


Number 6864664 Quote Date ... hip to: Scott Miller 1315 Kelley Rd Oneida, NY

13421 Qty. Item 2 K12.2 2 SpeakerStd 2 PROMO_1082 1 ProFX12v3 1

ProFX12v3Ear Description QSC 12 2000W K.2 Series Speaker

http://www.sweetwater.com/sto...

lang:en score:24 filesize: 765.11 K page_count: 1 document date: 2021-03-18

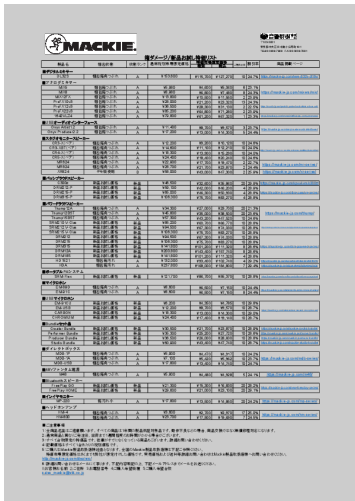

[pdf]

MACKIE PackingDefect SEP2021.xls K Ichitani news mackie jp enews 2021 09


DL32S MIX5 MIX8 MIX12FX ProFX10v3 ProFX12v3 ProFX22v3 1642VLZ4 USB

Onyx Artist1.2 Onyx Producer2.2 CR3-X CR3-XBT CR4-X CR5-X MR624 MR824

XR824 C300z DRM212-P DRM215-P DRM315-P Thump12A Thump12BST

Thump15BST SRM210 V-Clas SRM212 V-Clas SRM215 V-...

lang:it score:24 filesize: 571.41 K page_count: 1 document date: 2021-09-15

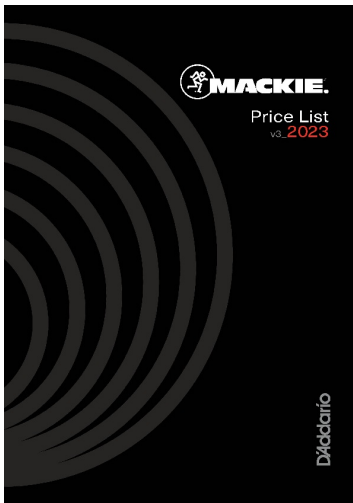

[pdf] Price List


Price Lists DAddario Australia Mackie List 2023 v3 v 1679450084 cdn shopify s files 1 0197 7034 ||| Mackie Price List 2023 Stock Code MIXERS Digital Mixers DL16S DL32S Analog Mixers MIX5 MIX8 MIX12FX ... 1038521 663961038538 663961057256 663961057263 663961057270 663961057294 663961057287 663961058826 ProFX12v3 Install Rack Mount Kit ProFX16v3 Install Rack Mount Kit Rackmount Bracket Set for 1202VLZ4... lang:en score:24 filesize: 830.67 K page_count: 8 document date: 2023-03-22

[pdf]

MACKIE PackingDefect2021spring summer xls K Ichitani e news mackie jp enews 2021 03 / 103-0001 10-1 TEL03-3639-7800FAX03-3639-7801 AXIS Digatl Mixing System A 865,300 470,000 1 AXIS Digatl Mixing System:DC161 DL32R1 DL Dante Expansion Card1 DC16 Road Case1 DL32S A 153,600 115,700 10 MIX5 A MIX8 A MIX12FX A ProFX6v3 A ProFX12v3 A... lang:en score:24 filesize: 138.11 K page_count: 1 document date: 2021-03-30

[pdf]

user 32917 w8396728 Index of img file receipt upload mackie ||| Gear4music Limited Kettlestring Lane, Clifton Moor, York, YO30 4XF United Kingdom Telefono: 06 94806 ... 84586 Quantit Descrizione Ex IVA Rappresentante vendite Non specificato IVA Inc. IVA 1 Mackie ProFX12v3 12-Channel Analog Mixer with USB 1 Mackie Carry Bag for ProFX12v3 Mixer 290.98 49.59 64.... lang:it score:24 filesize: 117.64 K page_count: 1 document date: 2022-07-11

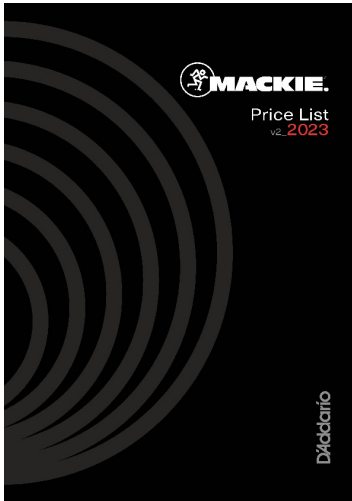


[\[pdf\]](#) Price List

Pricelists DAddario Australia Mackie Price List Jan 2023 v 1675827364 cdn shopify s files 1 0197 7034 |||

D Addario Australia Price List - Effective: January 1st 2023 Stock Code MIXERS

Digital Mixers DL16 ... 1038521 663961038538 663961057256 663961057263
663961057270 663961057294 663961057287 663961058826 ProFX12v3 Install
Rack Mount Kit ProFX16v3 Install Rack Mount Kit Rackmount Bracket Set for
1202VLZ4...

lang:en score:24 filesize: 792.68 K page_count: 8 document date: 2023-02-08

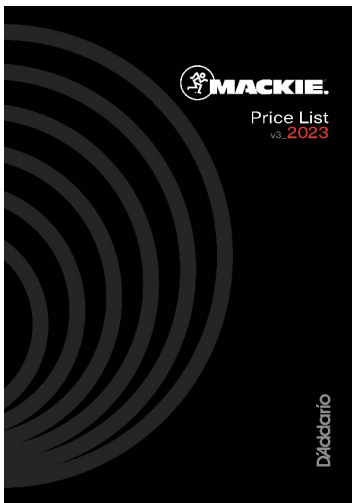


[\[pdf\]](#) Price List

Pricelists DAddario Australia Mackie Price List Jan 2023 v 1677801965 cdn shopify s files 1 0197 7034 |||

D Addario Australia Price List - Effective: January 1st 2023 Stock Code MIXERS

Digital Mixers DL16 ... 1038521 663961038538 663961057256 663961057263
663961057270 663961057294 663961057287 663961058826 ProFX12v3 Install
Rack Mount Kit ProFX16v3 Install Rack Mount Kit Rackmount Bracket Set for
1202VLZ4...


lang:en score:24 filesize: 792.57 K page_count: 8 document date: 2023-03-03

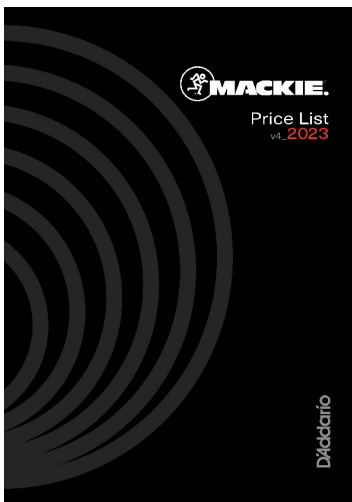

[Mackie Australia Price List v4 2023 - Audio Equipment](#)

Official Mackie Australia price list (v4 2023) detailing models, descriptions, RRP, and UPC for a comprehensive range of audio equipment including mixers, loudspeakers, amplifiers, microphones, headphones, and accessories.

lang:en score:24 filesize: 850.17 K page_count: 8 document date: 2023-05-22

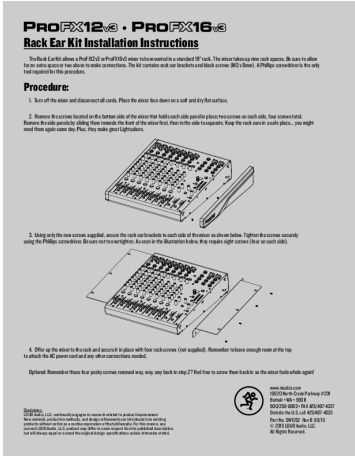


[pdf] Instructions

Rack Ear Kit Installation Instructions Mackie Procedure The allows a ProFX12v3 or ProFX16v3 mixer to be mounted in standard 19 rack takes up nine spaces Be sure allow ProFXv3 Ears mackie sites default files

...

lang:de score:23 filesize: 1.99 M page_count: 1 document date: 2019-09-11

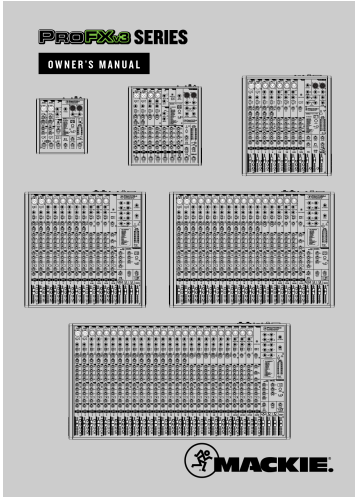


[pdf] User Manual Owner's Manual

User Manual 35082 1 huss licht ton de images products |||

OWNER S MANUAL USB 3-4 USB 3-4 USB 1-2 USB 1-2 MUTE MUTE MUTE MUTE MUTE MUTE MUTE LINE IN ... clockwise until the level set LED begins to illuminate.

10. Engage the channel s L-R assign switch ProFX12v3 / ProFX16v3 / ProFX22v3 / ProFX30v3 and turn up that channel s fader to the U unity ga...

lang:i-klnglon score:23 filesize: 5.26 M page_count: 42 document date: 2019-09-30

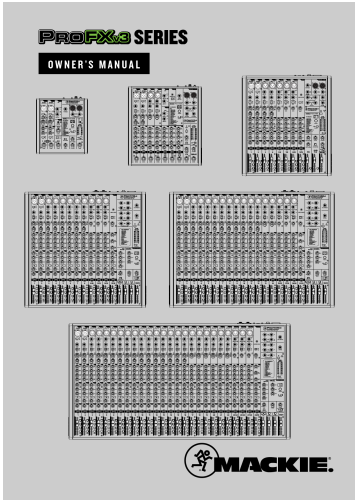

[pdf] User Manual Owner's Manual Instructions Diagram

ProFXv3 Professional Effects Mixer with USB OWNER S MANUAL Mackie 1 Read these instructions 2

Keep 3 Heed all warnings 4 Follow 5 Do not use this apparatus near water 6 Clean only a dry cloth 7


block any ventilation Owner s Manual The other green curves represent in between positions of the compressor knob higher 27 owner manual onyx mic pre Hookup Diagrams Typical Live Sound System

This diagram shows bass and guitar attached to channel line level inputs each Missing OM 634206

mackie profx6v3 profx12v3 ProFX V3 22 12 10 sites default files bhphotovideo lit manuals coolblue nl c0 be media djmania net manuales

...

lang:i-klnglon score:23 filesize: 9.17 M page_count: 42 document date: 2020-02-17

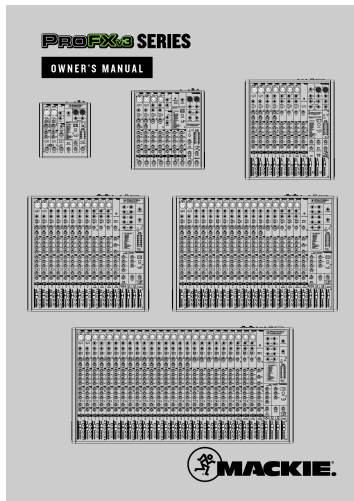


[pdf] User Manual Owner's Manual Instructions

Mackie ProFXv3 Series Owner s ManualCLICK HERECLICK HEREMackie Manual TMWMackie ProFX6V3 6 CH Analog Mixer with Effects USB Owners ManualMackie Manualtmw sg 2021 12 mackie sites default files PRODUCT RESOURCES MANUALS Manuals OMProFXv3 Professional USBProFXv3 USBMackie ManualProFXv3 PROFX12V3 Passivo DISPONIBILE NUOVO ARRIVO musicarteconegliano MANUALE DI ISTRUZIONI1 Read these instructions 2 Keep 3 Heed all warnings 4 Follow 5 Do not use this apparatus near water Clean only a dry cloth 7 block any ventilationOwner The other green curves represent in between positions of the compressor knob higher 27 Mixers TMWProFXv3 OMMackie Ommackie OMtmw Manualmackie OM |||

...

lang:de score:22 filesize: 9.23 M page_count: 0 document date: 2021-12-01

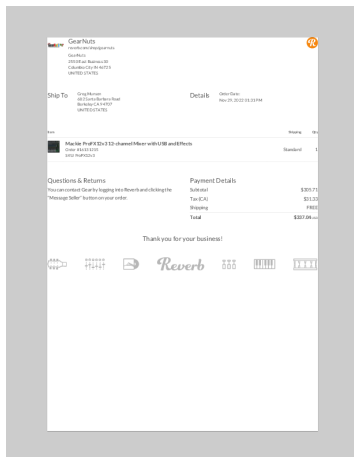


[pdf]

https reverb s 08b88d1a208792c6b7764e0aed103304 BattleBots Inc user 35700 Index of img file receipt upload mackie |||

GearNuts reverb.com/shop/gearnuts GearNuts 2550 East Business 30 Columbia City IN 46725 UNITED STATES Ship To Greg Munson 682 Santa Barbara Road Berkeley CA 94707 UNITED STATES Details Order Date: Nov 29, 2022 01:31 PM Item Mackie ProFX12v3 12-channel Mixer with USB and Effects Order #16131215 ...

lang:tl score:22 filesize: 89.26 K page_count: 1 document date: 2022-12-06

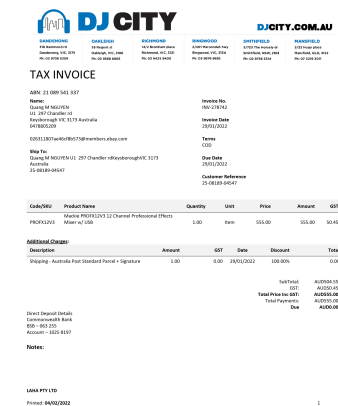

[pdf]

user 29726 invoice djcity inv 278742 for quangmnguyen Index of img file receipt upload mackie ||| TAX INVOICE ABN: 21 089 541 337 Name: Quang M NGUYEN U1 297 Chandler rd Keysborough VIC 3173 Austral ... ue Date 29/01/2022 Customer Reference 25-08189-04547 Code/SKU Product Name Quantity Unit Mackie **PROFX12V3** 12 Channel Professional Effects **PROFX12V3** Mixer w/ USB 1.00 Item Price 555.00 Amount ...

lang:tl score:22 filesize: 131.11 K page_count: 1 document date: 2020-07-06

[illegible]

[\[pdf\]](#)

FastReport export alza cz user 35520 hu221107865 Index of img file receipt upload mackie |||

Szmla - HU221107865 Jtllsi jegy s bizonylat - Elad: Alza.cz a.s. Jankovcova 1522/53,

17000 Prah ... zm: 10800007-50000000-14621016 Hivatkozi szm: 4704013741 Kd

Lers Db MCK03f Keverpult MACKIE ProFX12v3 1 SL190q Immaterilis termk Szllts -

Kiszllts a 1 cmre SL0090 Immaterilis termk Kompen...

lang:no score:22 filesize: 1.47 M page_count: 2 document date: 2022-11-29

Order #31830619 Confirmation

From: Mark Maggich (mark_maggich@senator.com)
To: sena@phs.com
Date: Friday, April 23, 2010 9:11 AM CDT

(800) 222-4701 | (202) 453-4176
What's New DealZone Shop

Sweetwater

Hi, Steve,

Thank you for your order – we always appreciate your decision to choose Sweetwater. As a returning customer, you know that we'll make sure your order gets to you as quickly and efficiently as possible. Of course, we'll ensure shipping and delivery confirmation to keep you in the loop the whole way. Please note that while Sweetwater is shipping orders at our usual prompt pace, some carts may be experiencing delays, and delivery dates could change. As always, if you have any questions, you can reach me at (800) 222-4701 x1265 or mark_maggich@sweetwater.com.

As part of our commitment to environmental stewardship, paper invoices are not included with shipments. If you'd like an extra copy of your invoice, you can download one from the [Sweetwater portal](#) or your Sweetwater account, or simply request one to me and I will email one to you.

Thank you again for choosing Sweetwater.
Mark and the Sweetwater Team

Your order number is 31830619

Billing Information	Shipping Information
Steven Zabeloff 6201 L St. Wilmington, IL 62208	Steven Zabeloff 6201 L St. Wilmington, IL 62208
E-mail: sena@phs.com	

[\[pdf\]](#)

user 31569 mackie profx12v3 purchase 04 22 2022 Index of img file receipt upload |||

4/24/22, 6:17 PM Yahoo Mail - Your Order 31830619 Confirmation Your Order

31830619 Confirmation Fr ... Payment Information Card: *****8045 836.33

Shipping Method FedEx Ground Home Product ProFX12v3 12-ch ProFX Mixer
w/USB FX GMixer1515 15x15 Padded Mixer Bag GoldTRS03 3 TRSM-TRSM Quad...

lang:en score:22 filesize: 123.04 K page_count: 3 document date: 2022-04-24

	Served by zSounds Music, LLC 8 Thornton Road Oakland, NJ 07436 phone 846-956-8762		INVOICE DATED: 08/17/13 OF: 1 of 1																															
	Order No. ZS821475		Payment Terms Discover Order Placed on 08/20/13 17:58:47																															
Bill To: Thierry Veret 27 Scfield Dr Scituate on MA 02072-3589 617-398-0556		Ship To: Thierry Veret 27 Scfield Dr Scituateon MA 02072-3589 617-398-0556																																
<table border="1"> <thead> <tr> <th>SKU</th> <th>Description - options</th> <th>Qty</th> <th>Price</th> <th>Subtotal</th> </tr> </thead> <tbody> <tr> <td>MAC R001120</td> <td>Mobile R001120 12" Professional USB Mixer - 12 Channel - New</td> <td>1</td> <td>\$528.00</td> <td>\$528.00</td> </tr> <tr> <td colspan="4"></td> <td>Subtotal \$528.00</td> </tr> <tr> <td colspan="4"></td> <td>Application: \$18.00</td> </tr> <tr> <td colspan="4"></td> <td>Shipping: \$0.00</td> </tr> <tr> <td colspan="4"></td> <td>Tax: \$22.00</td> </tr> </tbody> </table>					SKU	Description - options	Qty	Price	Subtotal	MAC R001120	Mobile R001120 12" Professional USB Mixer - 12 Channel - New	1	\$528.00	\$528.00					Subtotal \$528.00					Application: \$18.00					Shipping: \$0.00					Tax: \$22.00
SKU	Description - options	Qty	Price	Subtotal																														
MAC R001120	Mobile R001120 12" Professional USB Mixer - 12 Channel - New	1	\$528.00	\$528.00																														
				Subtotal \$528.00																														
				Application: \$18.00																														
				Shipping: \$0.00																														
				Tax: \$22.00																														
Plan 1																																		
Number of Payments	Start date	End date	Amount paid	Amount paid	Amount due																													
	08/20/13	08/20/13	\$500.00	\$0.00	\$528.00																													
Carrier		Date Shipped	Tracking Number	Weight																														
FedEx Ground				16.00 lbs																														

prices and availability of products are subject to change without notice. Product descriptions, prices, and availability are provided with intent of accuracy. However, Zounds Music, LLC does not bear any errors, omissions, or misrepresentations. Credit and sale must be **charge** and no returns are accepted.

[\[pdf\]](#)

user 31411 zzounds music llc order zz8224775 Index of img file receipt upload mackie |||

Serviced by zZounds Music, LLC. 8 Thornton Road Oakland, NJ 07436 phone 844-

996-8742 INVOICE Genera ... 27 Scofield Dr Stoughton MA 02072-3589 617-398-

0556 SKU MAC **PROFX12V3** Description - option Mackie ProFX12v3 Professional

USB Mixer, 12-Channel - New Qty Price Subtotal 1 359.99 359.99 Plan 1 ...

lang:en score:22 filesize: 49.88 K page count: 1 document date: 2022-04-15

[illegible]

PROFX12-2 • PROFX16-2


Rack Ear Kit Installation Instructions

Read this manual before attempting to install this rack. The entire instruction rack system. See below for an entire system rack view to make sure to install correctly. The kit contains one ear bracket and thick screws (M5 x 16), a Phillips screwdriver, the only tool required for the product.

Procedure:

1. Turn off the mixer and disconnect all cables. Place the mixer face down in a safe and dry flat surface.

Remove the screws located on the bottom side of the mixer that hold each side plate (see picture) in place. Remove all screws on each side. Use the screwdriver to gently pry the screws from the mixer. After the screws have been fully removed, keep the rack next to you, and place the mixer face down. Place the mixer into the rack.



2. Using only the new screws supplied, attach the rack brackets to the sides of the mixer as shown below. Tighten the screws securely using the Phillips screwdriver. Do not over-tighten. Use the illustrations below to ensure the correct placement (for each side only).



3. After the two mixer brackets are placed in place, the rack is complete. (Optional: Remove the screws through the top to attach to the PC control panel and any other accessories needed.)

Optional: Remove these four pins (only needed when used, only keep one step in step 2) from the rack back in the mixer before fully tight.



Warnings:

- Do not use any tools or equipment that could damage the mixer or the rack.
- Do not use any tools or equipment that could damage the mixer or the rack.
- Do not use any tools or equipment that could damage the mixer or the rack.
- Do not use any tools or equipment that could damage the mixer or the rack.

© 2004 by ProFX Inc. All rights reserved. ProFX Inc. is a registered trademark of ProFX Inc. in the United States and other countries. ProFX Inc. is not responsible for any damage or loss of data or equipment that may occur as a result of using this product. ProFX Inc. is not responsible for any damage or loss of data or equipment that may occur as a result of using this product.



10015 Broadway Blvd
Boulder, CO 80501
800-875-8755 • 303-440-4557
Fax: 303-440-4557
Email: info@profx.com
Web: www.profx.com
© 2004 ProFX Inc. All rights reserved.

2020年度 自主検査実施結果		検査機関名 株式会社 日本試験センター 〒100-0005 東京都千代田区千代田 1-10-10 日本橋三井ビルディング 10F TEL 03-6262-0000 FAX 03-6262-0001 E-MAIL info@jtc.co.jp			
					
ISO9001:2015					
ISO9001:2015-01 品質マネジメントシステム		ISO9001-2	合格		
ISO9001-1	品質マネジメントシステム	2019年10月1日	合格		
ISO9001-2	品質マネジメントシステム	2019年10月1日	合格		
ISO 14001:2015					
ISO 14001:2015-01 環境マネジメントシステム		ISO14001-2	合格		
ISO14001-1	環境マネジメントシステム	2019年10月1日	合格		
ISO14001-2	環境マネジメントシステム	2019年10月1日	合格		
ISO 45001:2018					
ISO 45001:2018-01 労働安全衛生マネジメントシステム		ISO 45001-2	合格		
ISO45001-1	労働安全衛生マネジメントシステム	2019年10月1日	合格		
ISO45001-2	労働安全衛生マネジメントシステム	2019年10月1日	合格		
ISO 27001:2017					
ISO 27001:2017-01 情報セキュリティマネジメントシステム		ISO27001-2	合格		
ISO27001-1	情報セキュリティマネジメントシステム	2019年10月1日	合格		
ISO27001-2	情報セキュリティマネジメントシステム	2019年10月1日	合格		
ISO 22301:2017					
ISO 22301:2017-01 事業継続マネジメントシステム		ISO22301-2	合格		
ISO22301-1	事業継続マネジメントシステム	2019年10月1日	合格		
ISO22301-2	事業継続マネジメントシステム	2019年10月1日	合格		
ISO 26262:2018					
ISO 26262:2018-01 機能安全マネジメントシステム		ISO26262-2	合格		
ISO26262-1	機能安全マネジメントシステム	2019年10月1日	合格		
ISO26262-2	機能安全マネジメントシステム	2019年10月1日	合格		
ISO 50001:2018					
ISO 50001:2018-01 エネルギーマネジメントシステム		ISO50001-2	合格		
ISO50001-1	エネルギーマネジメントシステム	2019年10月1日	合格		
ISO50001-2	エネルギーマネジメントシステム	2019年10月1日	合格		
ISO 9001:2015					
ISO 9001:2015-01 品質マネジメントシステム		ISO9001-2	合格		
ISO9001-1	品質マネジメントシステム	2019年10月1日	合格		
ISO9001-2	品質マネジメントシステム	2019年10月1日	合格		
ISO 14001:2015					
ISO 14001:2015-01 環境マネジメントシステム		ISO14001-2	合格		
ISO14001-1	環境マネジメントシステム	2019年10月1日	合格		
ISO14001-2	環境マネジメントシステム	2019年10月1日	合格		
ISO 45001:2018					
ISO 45001:2018-01 労働安全衛生マネジメントシステム		ISO 45001-2	合格		
ISO45001-1	労働安全衛生マネジメントシステム	2019年10月1日	合格		
ISO45001-2	労働安全衛生マネジメントシステム	2019年10月1日	合格		
ISO 27001:2017					
ISO 27001:2017-01 情報セキュリティマネジメントシステム		ISO27001-2	合格		
ISO27001-1	情報セキュリティマネジメントシステム	2019年10月1日	合格		
ISO27001-2	情報セキュリティマネジメントシステム	2019年10月1日	合格		
ISO 22301:2017					
ISO 22301:2017-01 事業継続マネジメントシステム		ISO22301-2	合格		
ISO22301-1	事業継続マネジメントシステム	2019年10月1日	合格		
ISO22301-2	事業継続マネジメントシステム	2019年10月1日	合格		
ISO 26262:2018					
ISO 26262:2018-01 機能安全マネジメントシステム		ISO26262-2	合格		
ISO26262-1	機能安全マネジメントシステム	2019年10月1日	合格		
ISO26262-2	機能安全マネジメントシステム	2019年10月1日	合格		
ISO 50001:2018					
ISO 50001:2018-01 エネルギーマネジメントシステム		ISO50001-2	合格		
ISO50001-1	エネルギーマネジメントシステム	2019年10月1日	合格		
ISO50001-2	エネルギーマネジメントシステム	2019年10月1日	合格		
ISO 9001:2015					
ISO 9001:2015-01 品質マネジメントシステム		ISO9001-2	合格		
ISO9001-1	品質マネジメントシステム	2019年10月1日	合格		
ISO9001-2	品質マネジメントシステム	2019年10月1日	合格		
ISO 14001:2015					
ISO 14001:2015-01 環境マネジメントシステム		ISO14001-2	合格		
ISO14001-1	環境マネジメントシステム	2019年10月1日	合格		
ISO14001-2	環境マネジメントシステム	2019年10月1日			

[\[pdf\]](#)

FastReport export alza cz user 34858 mackie pro12 hu22900023 Index of img file receipt upload |||

Szmila - HU22900023 Jtllsi jegy s bizonylat - Elad: Alza.cz a.s. Jankovcova 1522/53,
17000 Praha ... zm: 10800007-50000000-14621016 Hivatkozsi szm: 4668983261 Kd
Lers Db MCK03f Keverpult MACKIE ProFX12v3 1 SL190q Immaterilis termk Szllts -
Budapest 1 XIII. - Rbert Kroly krt. 54-58 Reg. sz...

lang:no score:22 filesize: 723.45 K page_count: 2 document date: 2022-10-02

[\[pdf\]](#) Instructions

Rack Ear Kit Installation Instructions Mackie The allows a ProFX12v3 or ProFX16v3 mixer to be mounted in standard 19 rack takes up nine spaces Be sure allow ProFXv3 Ears mackie sites default files

PRODUCT RESOURCES SUPPORT DOCS

lang:no score:22 filesize: 1.99 M page count: 1 document date: 2019-05-22

[\[pdf\]](#)

MACKIE Dealer Price 202301.xls K Ichitani Headphone Earphone AudioTools MP Series

UPC EAN 120 OPENPRICE Street 202302 mackie jp enews 2022 12 |||

202321 LOUDSPEAKERS Thrash Series Thrash212 Thrash215 OPENPRICE 55,000
50,000 OPENPRICE 6 ... I/O ProFXv3Series ProFX6v3 OPENPRICE 31,680 28,800
ProFX10v3 OPENPRICE 44,990 40,900 ProFX12v3 OPENPRICE 60,060 54,600
ProFX16v3 OPENPRICE 91,740 83,400 ProFX22v3 OPENPRICE 130...

lang:i-klinton **score:22** filesize: 598.22 K page_count: 8 document date: 2022-12-26