

[Manuals.plus](#) /

› [Rev-A-Shelf](#) /

› Rev-A-Shelf 5WB2-1222CR-1 Two-Tier Pullout Cabinet Organizer Instruction Manual

Rev-A-Shelf 5WB2-1222CR-1

Rev-A-Shelf 5WB2-1222CR-1 Two-Tier Pullout Cabinet Organizer Instruction Manual

Model: 5WB2-1222CR-1 | Brand: Rev-A-Shelf

INTRODUCTION

This manual provides detailed instructions for the installation, operation, and maintenance of your Rev-A-Shelf 5WB2-1222CR-1 Two-Tier Pullout Cabinet Organizer. This system is designed to enhance storage and accessibility within base kitchen cabinets, featuring two durable steel wire baskets with full-extension slides.



Image: The Rev-A-Shelf Two-Tier Cabinet Organizer, model 5WB2-1222CR-1, shown installed in a cabinet with cookware.

SAFETY INFORMATION

- Always measure your cabinet opening before installation to ensure a proper fit.
- Do not overload the baskets beyond the weight capacity of the slides (100 lbs per basket).
- For safer operation, consider adding the optional door mount kit (5WB-DMKIT), sold separately.
- Keep small children and pets away from the unit during installation and operation to prevent injury.

SETUP AND INSTALLATION

The Rev-A-Shelf Two-Tier Pullout Cabinet Organizer comes fully assembled and requires a simple 4-screw installation. Before beginning, ensure you have the necessary tools: an electric drill and a #2 Phillips bit.

Step 1: Measure Your Cabinet Opening

Accurate measurements are crucial for a proper fit. Consider your cabinet type (face frame or frameless) and any obstructions like hinges or plumbing.

- **Width (W):** Measure the opening width, accounting for any protruding hinges.
- **Height (H):** Measure the total height from the top edge to the bottom.
- **Depth (D):** Measure from the back wall to the front edge where the door sits.

Minimum Opening Dimensions for Model 5WB2-1222CR-1:

- **Face Frame Cabinet:** 11.5"W x 22.25"D x 19.5"H
- **Frameless Cabinet:** 11.75"W x 22.25"D x 19.5"H



UPGRADE YOUR HOME

Combine convenience and beauty
for your organization needs.

Image: Illustration distinguishing between frameless and face frame cabinet types, highlighting key features like full-width opening, hinges, and frame restrictions.



Image: Visual guide on measuring minimum cabinet opening, including considerations for protruding and non-protruding hinges.




Image: Step-by-step visual for measuring cabinet width (W), height (H), and depth (D) to ensure product compatibility.

Video: How to Measure Your Cabinet Opening

Your browser does not support the video tag.

Video: An official Rev-A-Shelf guide demonstrating the correct method for measuring cabinet openings to ensure a perfect fit for pullout organizers.

Step 2: Installation Process (4-Screw Method)

The organizer comes pre-assembled. Follow these steps for quick installation:

1. **Position the Frame:** Gather the included hardware. Place the organizer frame inside your cabinet at the desired location. Ensure to account for space needed for hinges and the cabinet door to close properly.
2. **Secure the Slides:** Attach the slide mechanism to the face frame of the cabinet, positioning it 1/4 inch back from the cabinet opening. If installing in a frameless cabinet, attach it directly to the sidewall.
3. **Attach Support Brackets:** Secure the support brackets to the cabinet base using the provided wood screws.
4. **Insert Baskets:** Use the remaining screws to mount the rear of the frame to the cabinet floor. Verify that the baskets extend smoothly and that your cabinet door closes fully. Make any necessary adjustments.



Image: Overview of the easy 9-screw installation process, highlighting tools needed (electric drill, #2 Phillips bit) and a quick DIY estimate of 20 minutes.

STEEL WIRE ORGANIZER


Two-Tier
Sliding
Basket

Shorter depths
for special
applications

Chrome
Plated
Wire Frame




Image: Step 1 of installation, showing how to attach the slides to the support brackets and position the frame within the cabinet.

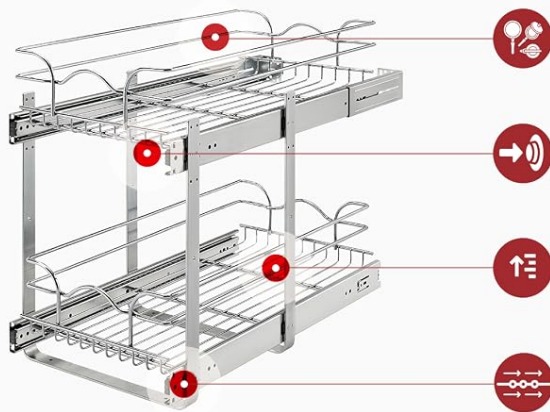

Hover your mouse over the hotspots (red dots) for more info

PRODUCT SPECIFICATIONS

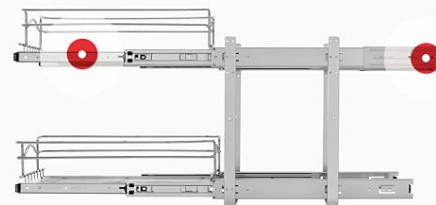

WIDTH (side to side)
11.75"

DEPTH (front to back)
22.00"
(Closed Position)

HEIGHT (adjustable)
16.25"
(up to 19.00")

Image: Step 2 of installation, illustrating how to secure the frame to the cabinet base using an electric drill.



Image: Step 3 of installation, showing the final step of inserting the baskets into the secured frame and ensuring smooth operation.

OPERATING INSTRUCTIONS

The Rev-A-Shelf Two-Tier Pullout Cabinet Organizer is designed for ease of use, providing full access to your stored items.

- **Pulling Out:** Gently pull the front of either basket to slide it out of the cabinet. The full-extension ball-bearing slides ensure smooth and complete access to items at the back.

- **Pushing In:** Push the basket back into the cabinet until it is fully recessed. Ensure no items obstruct the movement or prevent the cabinet door from closing.
- **Loading:** Distribute weight evenly across the baskets. Avoid placing excessively heavy items on one side. The maximum weight capacity per basket is 100 lbs.
- **Adjustable Dividers:** Utilize the adjustable dividers within the baskets to organize items of various sizes, such as pots, pans, lids, and small appliances, preventing them from shifting during movement.



Image: The Rev-A-Shelf Two-Tier Pullout Organizer fully extended from a cabinet, showcasing organized pots and pans.



Image: A visual representation of smart cabinet storage, demonstrating how the pullout organizer neatly stores pots, pans, and lids, maximizing cabinet space.

Video: Rev-A-Shelf 5WB2 Series Two Tier Pull Out Basket Organizers Overview

Your browser does not support the video tag.

Video: An official video showcasing the features and functionality of the Rev-A-Shelf 5WB2 Series Two-Tier Pullout Basket Organizers.

MAINTENANCE

Regular maintenance ensures the longevity and smooth operation of your Rev-A-Shelf pullout organizer.

- **Cleaning:** Wipe down the chrome-plated steel wire baskets and frame with a soft, damp cloth. For stubborn grime, use a mild household cleaner and dry thoroughly. Avoid abrasive cleaners or scouring pads, which can damage the finish.
- **Slide Lubrication:** The ball-bearing slides are pre-lubricated. If movement becomes stiff over time, apply a small amount of silicone-based lubricant to the slide mechanisms. Do not use oil-based lubricants, as they can attract dust and debris.
- **Hardware Check:** Periodically check all screws and mounting hardware to ensure they remain tight. Retighten if necessary to maintain stability.
- **Weight Distribution:** Always ensure items are distributed evenly within the baskets to prevent strain on the slides and frame.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Organizer does not slide smoothly.	Accumulated dirt or debris in slides. Lack of lubrication. Uneven weight distribution. Mounting screws are loose or misaligned.	Clean slides with a damp cloth and dry. Apply silicone-based lubricant to slides. Rearrange items for even weight distribution. Check and tighten all mounting screws. Ensure the frame is level.
Cabinet door does not close completely.	Organizer is installed too far forward. Items in the basket obstruct the door.	Adjust the organizer's position further back in the cabinet. Ensure all items are fully contained within the baskets and do not protrude.
Baskets feel wobbly or unstable.	Loose mounting hardware. Overloaded baskets.	Check and tighten all screws securing the frame to the cabinet. Reduce the weight in the baskets, ensuring it does not exceed 100 lbs per basket.

SPECIFICATIONS

Model Number	5WB2-1222CR-1
Product Dimensions (W x D x H)	11.75" x 22" x 19"

Minimum Opening Width (Face Frame)	11.5"
Minimum Opening Width (Frameless)	11.75"
Minimum Opening Depth	22.25"
Minimum Opening Height	19.5"
Material	Alloy Steel
Finish Type	Chrome
Number of Tiers	Two
Mounting Type	Cabinet-integrated (Pull Out)
Weight Capacity	100 lbs per basket
Included Components	(1) top basket, (1) bottom basket, (2) u-shape supports, (2) rear mounting brackets and hardware



Image: Diagram illustrating the closed and full-extension depths, basket height, and overall dimensions for cookware compatibility.

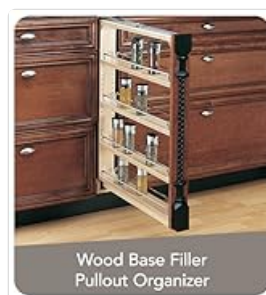


Image: Detailed dimensional drawing of the organizer, showing width (11.75"), closed depth (22"), and adjustable frame height (16.25" to 19").

WARRANTY INFORMATION

This Rev-A-Shelf product is covered by a **Limited Lifetime Warranty**. For specific details regarding coverage, terms, and conditions, please refer to the official Rev-A-Shelf website or contact customer support.

CUSTOMER SUPPORT

For further assistance, technical support, or to inquire about replacement parts, please contact Rev-A-Shelf customer service:

- **Website:** Visit the official [Rev-A-Shelf website](#) for product information and support resources.
- **Contact:** Refer to the "Contact Us" section on the Rev-A-Shelf website for phone numbers or email support options.

© 2026 Rev-A-Shelf. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question