

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

Jensen JWM60A

Jensen JWM60A Wallmount Stereo User Manual

AM | FM | DVD | CD | USB | AUX | App Ready Bluetooth Stereo

INTRODUCTION

This manual provides comprehensive instructions for the operation and maintenance of your Jensen JWM60A Wallmount Stereo. This unit is designed to provide high-quality audio and video entertainment with features including AM/FM radio, DVD/CD playback, USB and AUX inputs, and App Ready Bluetooth connectivity. Please read this manual thoroughly before installation and operation to ensure proper use and to maximize the performance of your device.

SAFETY INFORMATION

IMPORTANT SAFETY NOTICE:

Before using the DVD player function, ensure that the "Transport/Shipping Screw" located at the rear of the unit has been removed. This screw protects the DVD player mechanism during transit but must be removed for proper disc loading and playback. If not removed, discs may load for a few seconds and then eject. Always read the entire Owner's Manual before installing the stereo.

Always operate the unit within its specified voltage (12 Volts). Avoid exposing the unit to extreme temperatures, moisture, or direct sunlight. Do not attempt to disassemble or modify the unit, as this may void the warranty and pose a safety risk. Ensure proper ventilation around the unit during operation.

PRODUCT OVERVIEW



Figure 1: Front panel of the Jensen JWM60A Wallmount Stereo, showing the display, control knob, and various buttons.

Front Panel Controls and Display:

- **Display:** Central digital display showing current mode (FM, AM, DISC, BT, USB, AUX), frequency (e.g., FM 87.5), track number, and other status indicators like LOUD, ABC, CH.
- **Control Knob (ENTER):** Large central rotary knob for volume control and menu navigation. Pressing the knob acts as an ENTER button.
- **Power Button:** Located top-left, used to turn the unit on or off.
- **VIEW Button:** Below Power, likely for changing display views or information.
- **Brightness Controls (▲/▼ BRIGHT):** Adjusts the display brightness.
- **Preset Buttons (1-6):** Used for storing and recalling radio station presets or direct track selection for disc playback.
 - **1 (Play/Pause):** Play/Pause for media.
 - **2 (Rewind/Previous):** Rewind or previous track.
 - **3 (Shuffle):** Shuffle playback.
 - **4 (Repeat):** Repeat playback.
 - **5 (Folder Up):** Navigate up a folder.
 - **6 (Folder Down):** Navigate down a folder.
- **Skip/Seek Buttons (◀◀ / ▶▶):** Used for skipping tracks or seeking radio stations.
- **MENU Button:** Accesses the main menu for settings.
- **EJECT Button:** Ejects discs from the DVD/CD slot.
- **Source Buttons:**
 - **AM:** Selects AM radio band.
 - **FM:** Selects FM radio band.

- **DISC:** Selects DVD/CD playback.
- **BT (Bluetooth):** Selects Bluetooth audio streaming.
- **USB:** Selects USB media playback.
- **AUX:** Selects Auxiliary input.
- **USB Port:** Located bottom-left, for connecting USB devices.
- **AUX Input:** Located bottom-right, for connecting external audio devices via 3.5mm jack.
- **Zone Control Buttons (ZONE A, ZONE B, ZONE C):** Controls audio output to different speaker zones.
- **Clock/Alarm Controls:**
 - **HOUR:** Adjusts hour for clock/alarm.
 - **MINUTE:** Adjusts minute for clock/alarm.
 - **ALARM:** Sets or activates alarm.
 - **ON/OFF SET (Clock):** Sets or turns on/off clock.
 - **SLEEP:** Activates sleep timer.
- **Audio Controls:**
 - **▶ II (Play/Pause):** Play/Pause for media.
 - **MUTE:** Mutes audio output.
 - **AUDIO:** Accesses audio settings (e.g., bass, treble, balance).
 - **LOUD:** Activates loudness compensation for enhanced bass and treble at low volumes.
- **SETTINGS Button:** Accesses general system settings.
- **AS/PS (Auto Store/Preset Scan) Button:** Automatically scans and stores strong radio stations or scans through presets.

SETUP

Initial Installation:

1. **Remove Shipping Screw:** Locate and remove the "Transport/Shipping Screw" from the rear of the unit. This is crucial for the DVD player to function correctly.
2. **Mounting:** Securely mount the JWM60A stereo in the desired wall or cabinet opening. Ensure adequate space for ventilation.
3. **Wiring:** Connect the power, ground, speaker, and antenna wires according to the wiring diagram provided in the full owner's manual. Pay close attention to polarity for speaker connections.
4. **External Connections:** Connect any external devices such as auxiliary audio sources or USB drives to the respective ports.
5. **Power On:** Once all connections are secure, connect the unit to a 12-volt power source. Press the **POWER** button to turn on the unit.

Clock Setting:

- Press the **CLOCK ON/OFF SET** button.
- Use the **HOUR** and **MINUTE** buttons to adjust the time.
- Press **CLOCK ON/OFF SET** again to confirm and exit.

OPERATING

Source Selection:

Press the corresponding source button (**AM**, **FM**, **DISC**, **BT**, **USB**, **AUX**) to switch between different audio/video sources.

Radio Operation (AM/FM):

- Press **AM** or **FM** to select the desired band.
- Use the **◀◀** or **▶▶** buttons to seek for the next/previous strong station.
- To manually tune, press and hold **◀◀** or **▶▶** until the frequency starts changing, then release.
- **Storing Presets:** Tune to the desired station, then press and hold one of the numbered preset buttons **1-6** until the display confirms storage.
- **Recalling Presets:** Briefly press a numbered preset button **(1-6)** to recall a stored station.
- **Auto Store/Preset Scan (AS/PS):** Press **AS/PS** to automatically scan and store the strongest stations or to briefly play each stored preset.

Disc Playback (DVD/CD):

- Insert a disc into the disc slot. The unit will automatically switch to **DISC** mode and begin playback.
- Press **▶⏸** to pause/resume playback.
- Use **◀◀** or **▶▶** to skip tracks/chapters.
- Press **EJECT** to remove the disc.
- Supported formats include CD, CD-R, CD-RW, DVD, DVD RW, DVD-RW, MP3, DVD-Video, MPEG-4, VCD, JPEG, CD-DA, WMA.

USB Playback:

- Insert a USB flash drive into the USB port. The unit will switch to **USB** mode.
- Use **◀◀** or **▶▶** to navigate tracks.
- Use preset buttons **5** and **6** for folder navigation.

Bluetooth Operation:

- Press the **BT** button to select Bluetooth mode.
- On your Bluetooth-enabled device (smartphone, tablet), search for available devices and select "JWM60A".
- Once paired, you can stream audio from your device to the stereo.
- Use the **▶⏸**, **◀◀**, and **▶▶** buttons on the stereo to control playback.

Auxiliary Input:

- Connect an external audio device (e.g., MP3 player) to the **AUX** input jack using a 3.5mm audio cable.
- Press the **AUX** button to select the auxiliary input source.
- Control playback from the connected external device.

Audio Settings:

- Press the **AUDIO** button to cycle through audio settings such as Bass, Treble, Balance, and Fader. Use the control knob to adjust values.
- Press **LOUD** to toggle the loudness feature, which enhances bass and treble at lower volumes.
- Press **MUTE** to temporarily silence the audio output. Press again to unmute.

Zone Control:

- Use the **ZONE A**, **ZONE B**, and **ZONE C** buttons to control which speaker zones are active. This allows for independent audio control in different areas.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the unit's exterior. For stubborn marks, dampen the cloth slightly with water. Do not use harsh chemicals or abrasive cleaners.
- **Disc Care:** Handle discs by their edges. Keep them clean and free of scratches. Use a soft, lint-free cloth to wipe discs from the center outwards.
- **Ventilation:** Ensure that the ventilation openings on the unit are not blocked to prevent overheating.
- **Power Disconnection:** If the unit will not be used for an extended period, it is advisable to disconnect it from the power source.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Unit does not power on.	No power supply; Blown fuse; Incorrect wiring.	Check power connections; Replace fuse if necessary; Verify wiring according to manual.
Disc loads then ejects immediately.	Transport/Shipping Screw not removed.	Remove the Transport/Shipping Screw from the rear of the unit.
No sound from speakers.	Volume too low; Mute activated; Incorrect speaker wiring; Zone control off.	Increase volume; Deactivate MUTE; Check speaker connections; Ensure correct ZONE is active.
Bluetooth connection issues.	Device not in pairing mode; Stereo not discoverable; Interference.	Ensure stereo is in BT mode; Restart both devices; Move closer to the unit; Try re-pairing.
Poor radio reception.	Antenna not connected or damaged; Weak signal area.	Check antenna connection; Try repositioning antenna; Use AS/PS function.

SPECIFICATIONS

Brand: Jensen

Model: JWM60A

Item Weight: 4.79 pounds

Product Dimensions: 11.25 x 8.5 x 8.5 inches

Voltage: 12 Volts

Connectivity Technology: Auxiliary, Bluetooth, USB

Controller Type: iOS or Android (App Control)

Compatible Devices: Smartphone, Speaker

Connector Type: 3.5mm Jack, USB

Audio Output Mode: Stereo

Surround Sound Channel Configuration: 5.1

Video Encoding: MPEG-2

Color: Black

Supported Media: CD, CD-R, CD-RW, DVD, DVD RW, DVD-RW, MP3, DVD-Video, MPEG-4, VCD, JPEG, CD-DA, WMA, Dolby

WARRANTY AND SUPPORT

This Jensen JWM60A unit is a renewed product. Amazon Renewed products are professionally inspected and tested to work and look like new. If you are not satisfied with your purchase, renewed products are eligible for replacement or refund under the [Amazon Renewed Guarantee](#).

For further assistance or technical support, please refer to the official Jensen support channels or the Amazon Renewed customer service.

Documents - Jensen – JWM60A



[Jensen JWM60A Mobile Audio System: Installation and Owner's Manual](#)

This Jensen JWM60A owner's manual details installation, operation, and features like Bluetooth, USB, and DVD playback. It includes essential precautions and troubleshooting for your mobile audio system.


lang:en score:43 filesize: 4.8 M page_count: 24 document date: 2017-09-18



[JENSEN JWM60A Mobile Audio System: Installation and Owner's Manual](#)

This manual provides comprehensive instructions for the JENSEN JWM60A mobile audio system, covering installation, operation of tuner, CD/DVD, USB, Bluetooth, app control, remote functions, setup menus, care, troubleshooting, and specifications. Includes safety precautions and FCC compliance.

lang:en score:43 filesize: 10.63 M page_count: 26 document date: 2018-07-22

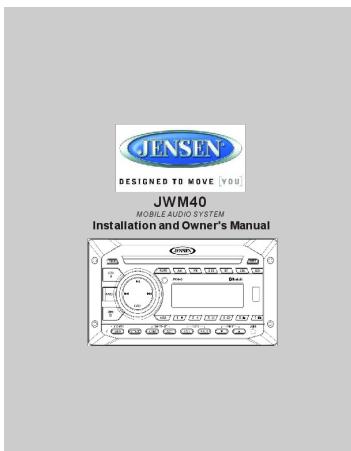

[Jensen JWM40 Mobile Audio System: Installation and Owner's Manual](#)

This comprehensive manual guides users through the installation, operation, and features of the Jensen JWM40 Mobile Audio System, including DVD, CD, MP3, USB, and Bluetooth functionality. It also provides troubleshooting tips and technical specifications.

lang:en score:31 filesize: 1.81 M page_count: 23 document date: 2019-07-24



[JENSEN JWM60A Système Audio Mobile : Manuel d'Installation et d'Utilisation](#)

Manuel complet pour le système audio mobile JENSEN JWM60A, couvrant l'installation, le fonctionnement, les spécifications et le dépannage. Apprenez à utiliser toutes les fonctionnalités de votre appareil.

lang:fr score:30 filesize: 1.97 M page_count: 26 document date: 2017-07-17



[Jensen JWM60A Mobile Audio System: Installation and Owner's Manual](#)

Comprehensive guide for the Jensen JWM60A mobile audio system, covering installation, operation, features, troubleshooting, and specifications. Learn how to connect, control, and maintain your Jensen audio system.

lang:en score:30 filesize: 4.8 M page_count: 24 document date: 2017-09-18



[\[pdf\] User Manual Owner's Manual Instructions Troubleshooting Guide](#)

91AK10000G IB JWM60A cdr 15 UserMan GOOD GRACE FAR EAST LIMITED JENSEN3 ZONE WALL STEREO 2AL9FJWM60A jwm60a


JWM60A MOBILE AUDIO SYSTEM Installation and Owner's Manual CONTENTS

Introduction..... 3 Disc

Notes..... 4

Installation..... 5 Wiring.....

lang:en score:28 filesize: 3.85 M page_count: 23 document date: 2017-07-11

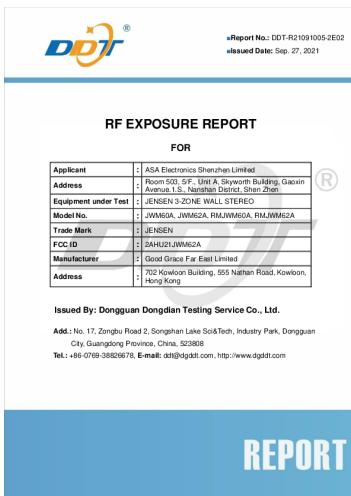

[\[pdf\] Test Report SAR Rating](#)

ASA Electronics Shenzhen Limited JENSEN 3 ZONE WALL STEREO JWM60A JWM62A RMJWM60A RMJWM62A Good Grace Far East FCC RF exposure evaluation 1JWM62A 2AHU21JWM62A 1jwm62a Dongguan Dongdian Testing Service Co., Ltd. Report No.: DDT-R21091005-2E02 Report No.: DDT-R21091005 ... uilding, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen : JENSEN 3-ZONE WALL STEREO Model No. : **JWM60A**, JWM62A, RMJWM62A, RMJWM60A, Trade Mark : JENSEN FCC ID : 2AHU21JWM62A Manufacturer : Go...

lang:en score:28 filesize: 846.06 K page_count: 6 document date: 2021-09-29



[\[pdf\]](#)

AWM968 TO JWM60A pcn2 asasupportdocs blob core windows net docs Product Change Notice |||

Product Change Notice In order to ensure our products continue to evolve as the technological market changes, ASA Electronics will be updating our audio line as follows: The JENSEN AWM968 wallmount stereo will be discontinued. ASA

Electronics will replace this unit with the JENSEN **JWM60A** wallmount s...

lang:en score:27 filesize: 222.04 K page_count: 1 document date: 2017-05-16



[pdf] Specifications

LIT JWM60A ASA Electronics asasupportdocs blob core windows net docs Literature |||

AM FM DVD CD USB Bluetooth Stereo **JWM60A** PRODUCT FEATURES App Ready

- Control main functions from most Bluetooth devices with JENSEN jControl app

Sleeker, slimmer profile, designed to hide mounting screws Dedicated Bluetooth

button A2DP, AVRCP - 33-ft. range Three speaker zones Plays CD, CD...


lang:en score:26 filesize: 2.88 M page_count: 2 document date: 2019-06-28



[JENSEN JWM60A to JWM62A Product Change Notice: Manufacturing Update](#)

Official product change notice from JENSEN (ASA Electronics) detailing the transition of the JWM60A Wall Mount Stereo manufacturing from China to Malaysia, introducing the JWM62A model with identical features and specifications.

lang:en score:25 filesize: 824.95 K page_count: 1 document date: 2019-11-05

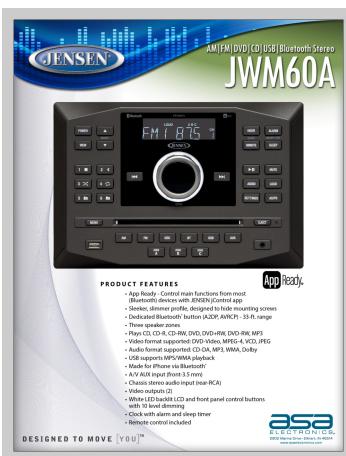

[pdf] Specifications

AM FM DVD CD USB Bluetooth Stereo JWM60A devices with JENSEN jControl app Sleeker slimmer profile designed to hide mounting screws @Dedicated button A2DP AVRCP 33 ft range B1VrdyHBKaS images na ssl amazon I Supports Streaming Audio Pre set Equalizer 5 settings User Flat Pop Classical Rock Electronic Bass Treble Balance and Fader Controls 3 seconds Skip Protected Disc Mechanism Slot type R RW MP3 Compatible Time Alarm Clock White LED Backlight LCD front panel control buttons


AM FM DVD CD USB Bluetooth Stereo **JWM60A** PRODUCT FEATURES App Ready

- Control main functions from most Bluetooth devices with JENSEN jControl app

Sleeker, slimmer profile, designed to hide mounting screws Dedicated Bluetooth

button A2DP, AVRCP - 33-ft. range Three speaker zones Plays CD, CD...

lang:en score:24 filesize: 2.86 M page_count: 2 document date: 2017-11-20

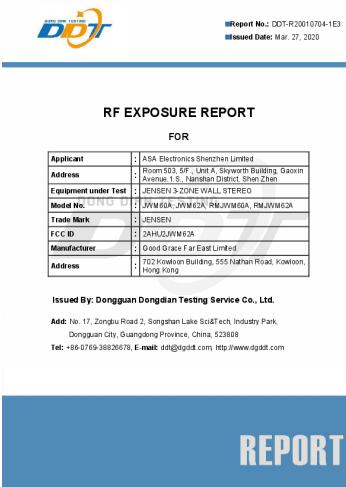

[pdf] Declaration of Conformity Test Report SAR Rating

Microsoft Word DDT R20010704 1E3 JWM62A FCC RF Exposure Report doc sam ASA Electronics

Shenzhen Limited JENSEN 3 ZONE WALL STEREO 2AHU2JWM62A jwm62a

Dongguan Dongdian Testing Service Co., Ltd Report No.:DDT-R20010704-1E3

Report No.: DDT-R20010704- ... uilding, Gaoxin Avenue.1.S., Nanshan District, Shen

Zhen : JENSEN 3-ZONE WALL STEREO Model No. : **JWM60A**, JWM62A,

RMJWM60A, **RMJWM62A** Trade Mark : JENSEN FCC ID : 2AHU2JWM62A

Manufacturer : Goo...

lang:en score:22 filesize: 598.24 K page_count: 6 document date: 2020-04-08




[pdf] User Manual Owner's Manual Troubleshooting Guide Specifications

User Manual Tonning Electronic Technology CO Ltd JWM40 Car Radio 2AMST 2AMSTJWM40 jwm40

JWM40 MOBILE AUDIO SYSTEM Installation and Owner's Manual CONTENTS

Introduction..... to read all of the instructions before beginning the installation. We recommend having your Jensen **JWM60A** installed by a reputable RV dealership. Tools and Supplies You will need these tools and su...

lang:en score:21 filesize: 1.79 M page_count: 23 document date: 2017-10-09

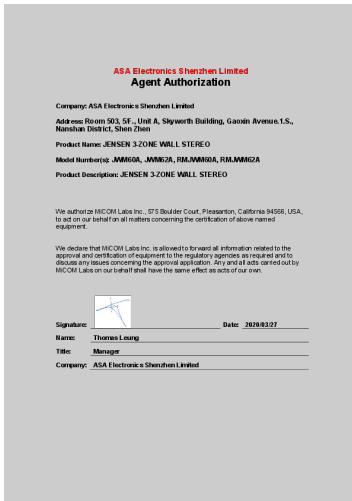


[pdf] Agent Authorization

Microsoft Word Agent Authorization Rev 1 0 JWM62A docx sam ASA Electronics Shenzhen Limited

JENSEN 3 ZONE WALL STEREO 2AHU2JWM62A jwm62a

ASA Electronics Shenzhen Limited Agent Authorization Company: ASA Electronics Shenzhen Limited Address: Room 503, 5/F., Unit A, Skyworth Building, Gaoxin Avenue 1.S., Nanshan District, Shen Zhen Product Name: JENSEN 3-ZONE WALL STEREO Model Number s : **JWM60A**, JWM62A, RMJWM60A, RMJWM62A Product Desc...

lang:en score:20 filesize: 132.4 K page_count: 1 document date: 2020-04-07

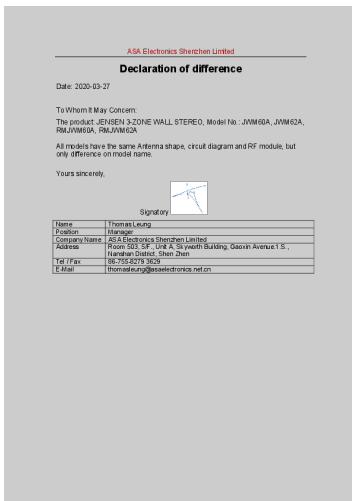

[pdf] Declaration of Conformity Diagram

Microsoft Word Declaration letter of difference JWM62A doc sam ASA Electronics Shenzhen Limited

JENSEN 3 ZONE WALL STEREO 2AHU2JWM62A jwm62a

ASA Electronics Shenzhen Limited Declaration of difference Date: 2020-03-27 To Whom It May Concern: The product: JENSEN 3-ZONE WALL STEREO, Model No.: **JWM60A**, JWM62A, RMJWM60A, RMJWM62A All models have the same Antenna shape, circuit diagram and RF module, but only difference on model name. Yours si... lang:tl score:20 filesize: 129.56 K page_count: 1 document date: 2020-04-07




[pdf] Specifications

AM FM DVD CD USB Bluetooth Stereo JWM62A Supports A2DP AVRCP Streaming Audio Pre set Equalizer 5 settings User Flat Pop Classical Rock Electronic Bass Treble Balance and Fader Controls 3 seconds Skip Protected Disc Mechanism Slot type R RW MP3 Compatible Time Alarm Clock White LED Backlight LCD front panel control buttons 91N4dNdbfzL images na ssl amazon I NET App Ready Control main functions from most devices with JENSEN jControl app Sleeker slimmer profile designed to hide mounting screws LIT asasupportdocs blob core windows net docs Literature

AM FM DVD CD USB Bluetooth Stereo JWM62A PRODUCT FEATURES App Ready - Control main functions from m ... included /APP Wall Mount Radio AM FM DVD CD USB Bluetooth Stereo JWM62A 6/29/17 TECHNICAL DATA **JWM60A** AM/FM/DVD/ **JWM60A** AM/FM/DVD/BT/USB/AUX 2 /APP Wall Mount Radio 6/29/17 A AM/FM/DVD/BT/USB/...

lang:en score:19 filesize: 572.72 K page_count: 2 document date: 2019-12-18

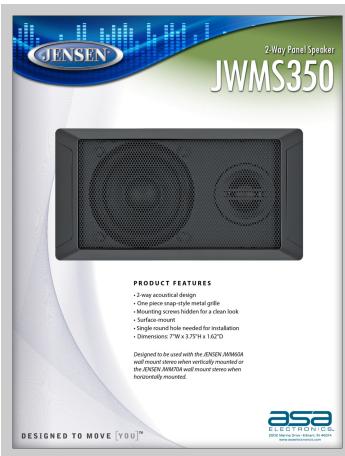

[pdf] Specifications Dimension Guide

JWMS350 asasupportdocs blob core windows net TECHNICAL DATA 5 10 2017 PANEL SPEAKER Max RH FEATURES 2 Way Acoustical Design Plastic Chassis construction One piece metal grille Mounting Depth LIT docs Literature Panel Speaker NET way acoustical design snap style screws hidden for a clean look Surface mount

2-Way Panel Speaker JWMS350 PRODUCT FEATURES 2-way acoustical design One piece snap-style metal grille Mounting screws hidden for a clean look Surface-mount Single round hole needed for installation Dimensions: 7 W x 3.75 H x 1.62 D Designed to be used with the JENSEN **JWM60A** wall mount stereo ...

lang:en score:16 filesize: 2.88 M page_count: 2 document date: 2017-09-29



FCC CERTIFICATION TEST REPORT

FOR

Applicant	: ASA Electronics Shenzhen Limited
Address	: Room 503, 5/F, Unit A, Skyworth Building, Gaoxin Avenue 1.5, Nanshan District, Shenzhen
Equipment under Test	: JENSEN 3 ZONE WALL STEREO
Model No.	: JWM62A, JWM62A, RMJWM62A, RMJWM62A
Trade Mark	: JENSEN
FCC ID	: 2AHU2JWM62A
Manufacturer	: Good Grace Far East Limited
Address	: 10/F, Mingzhu Building, 555 Nantian Road, Kowloon, Hong Kong

Issued By: Dongguan Dongdian Testing Service Co., Ltd.

Add: No. 17, Zonghu Road 2, Songshan Lake Sci&Tech. Industry Park, Dongguan City, Guangdong Province, China, 523808
Tel: +86-0769-3893678, E-mail: dd@ddgt.com http://www.ddgt.com

[pdf] Declaration of Conformity Test Report

Microsoft Word DDT R20010704 1E2 JWM62A FCC ID Report BT EDR doc sam ASA Electronics

Shenzhen Limited JENSEN 3 ZONE WALL STEREO 2AHU2JWM62A jwm62a

Dongguan Dongdian Testing Service Co., Ltd. Report No.: DDT-R20010704-1E2
Report No.: DDT-R20010704 ... uilding, Gaoxin Avenue.1.S., Nanshan District, Shen Zhen : JENSEN 3-ZONE WALL STEREO Model No. : **JWM60A**, JWM62A, RMJWM62A, RMJWM62A Trade Mark : JENSEN FCC ID : 2AHU2JWM62A Manufacturer Address...

lang:en score:15 filesize: 2.43 M page_count: 69 document date: 2020-04-08





[pdf] User Manual Guide Accessories

FUN TO DRIVE Good Sam the chassis manual I have an original paper copy of GM but additional copies are getting scarce and many P owners will MotorhomeMagazineApril2018 webcontent goodsam motorhomemagazine digital editions

READY TO ROLL: ANNUAL GUIDE TO THE LATEST GEAR FUN TO DRIVE
FEATURE-RICH PHOENIX CRUISER 2910T ICO ... either horizontally or vertically to pair up with Jensen s peel back the top and leave in place. **JWM60A** and JWM70A wall-mount stereos, though it will also work Once the all-natural calcium chlorid...
lang:en score:12 filesize: 29.67 M page_count: 68 document date: 2018-02-09

Report No.: DGT-R2101005-2E01
Issued Date: Sep. 27, 2021

FCC CERTIFICATION TEST REPORT
FOR

Applicant	ASA Electronics Shenzhen Limited
Address	Room 502, 5/F, Unit A, Skyworth Building, Gaoxin Industrial Park, Binhai New Area, Tianjin, China
Equipment under Test	JENSEN 3 ZONE WALL STEREO
Model No.	JWM60A, JWM62A, RMJWM60A, RMJWM62A
Trade Mark	JENSEN
FCC ID	2ABHUS, JWM62A
Manufacturer	Good Grace Far East Limited
Address	702 Kowloon Building, 555 Nathan Road, Kowloon, Hong Kong

Issued By: Dongguan Donglian Testing Service Co., Ltd.
Add.: No. 17, Zonghu Road 2, Songshan Lake Sci&Tech, Industry Park, Dongguan City, Guangdong Province, China, 523008
Tel.: +86-0769-3882678, E-mail: ddt@dgdt.com, http://www.dgdt.com

⑤

REPORT

[pdf] Test Report

ASA Electronics Shenzhen Limited JENSEN 3 ZONE WALL STEREO JWM60A JWM62A RMJWM60A RMJWM62A Good Grace Far East Test report for BT 1JWM62A 2AHU21JWM62A 1jwm62a

...

lang:en score:10 filesize: 3.13 M page_count: 75 document date: 2021-09-29