

Untrammelife 784529200188

Untrammelife 5-Light Linear Pendant Light Fixture

Model: 784529200188

INTRODUCTION

This manual provides detailed instructions for the safe installation, operation, and maintenance of your Untrammelife 5-Light Linear Pendant Light Fixture. Please read all instructions carefully before beginning installation and retain this manual for future reference.

The Untrammelife 5-Light Linear Pendant Light Fixture features a modern and industrial design with a durable metal frame and geometric structure. It is designed for indoor use and is suitable for various rooms such as dining areas, kitchens, and living spaces. The fixture offers adjustable hanging height to accommodate different ceiling heights and room layouts.

SAFETY INFORMATION

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker before installation or servicing.
- All wiring must be in accordance with national and local electrical codes. If you are unsure about wiring, consult a qualified electrician.
- Use only the specified bulb type and wattage. Exceeding the maximum wattage may cause overheating and damage to the fixture or create a fire hazard.
- Do not install this fixture in wet or damp locations. It is designed for indoor, dry location use only.
- Handle the fixture with care. Avoid dropping or striking the fixture, as this may cause damage.
- Keep flammable materials away from the light bulbs when the fixture is in operation.

PACKAGE CONTENTS

Verify that all components are present before beginning installation:

- Light Fixture Assembly
- Mounting Hardware Kit
- Hard Stems (various lengths for adjustable height)
- User Manual

SPECIFICATIONS

Feature	Detail
Brand	Untrammelife
Model Number	784529200188
Material	Metal
Frame Color	Black
Finish Type	Powder Coated
Style	Modern, Industrial
Fixture Form	Chandelier, Linear Pendant
Number of Light Sources	5
Bulb Base	E12 (Candelabra)
Max Wattage per Bulb	60 Watts
Compatible Bulb Types	LED, Incandescent (Bulbs not included)
Voltage	120 Volts
Installation Type	Ceiling Mount (Pendant/Chandelier)
Adjustable Height	Yes (Min 4-1/8 inches, Max 46-1/8 inches)
Dimensions (L x W x H)	40" x 12" x 59.4" (Maximum Height)
Item Weight	7.2 Kilograms
Indoor/Outdoor Use	Indoor Only
Water Resistance Level	Not Water Resistant
Required Assembly	Yes

SETUP AND ASSEMBLY

This fixture requires assembly and hardwiring. Please refer to the included user manual for detailed, step-by-step instructions and diagrams. The following provides a general overview.

1. Prepare for Installation

- Turn off power at the main circuit breaker.
- Unpack all components and inspect for any damage.
- Gather necessary tools (not included): screwdriver, wire strippers, electrical tape, safety glasses.

2. Adjusting Hanging Height

The fixture's height can be adjusted using the provided hard stems. It includes three 12-inch, one 6-inch, and one 3-inch stems. Combine these stems to achieve your desired hanging height, from a minimum of 4-1/8 inches to a maximum of 46-1/8 inches.

SIZE

Adapt to sloped ceiling

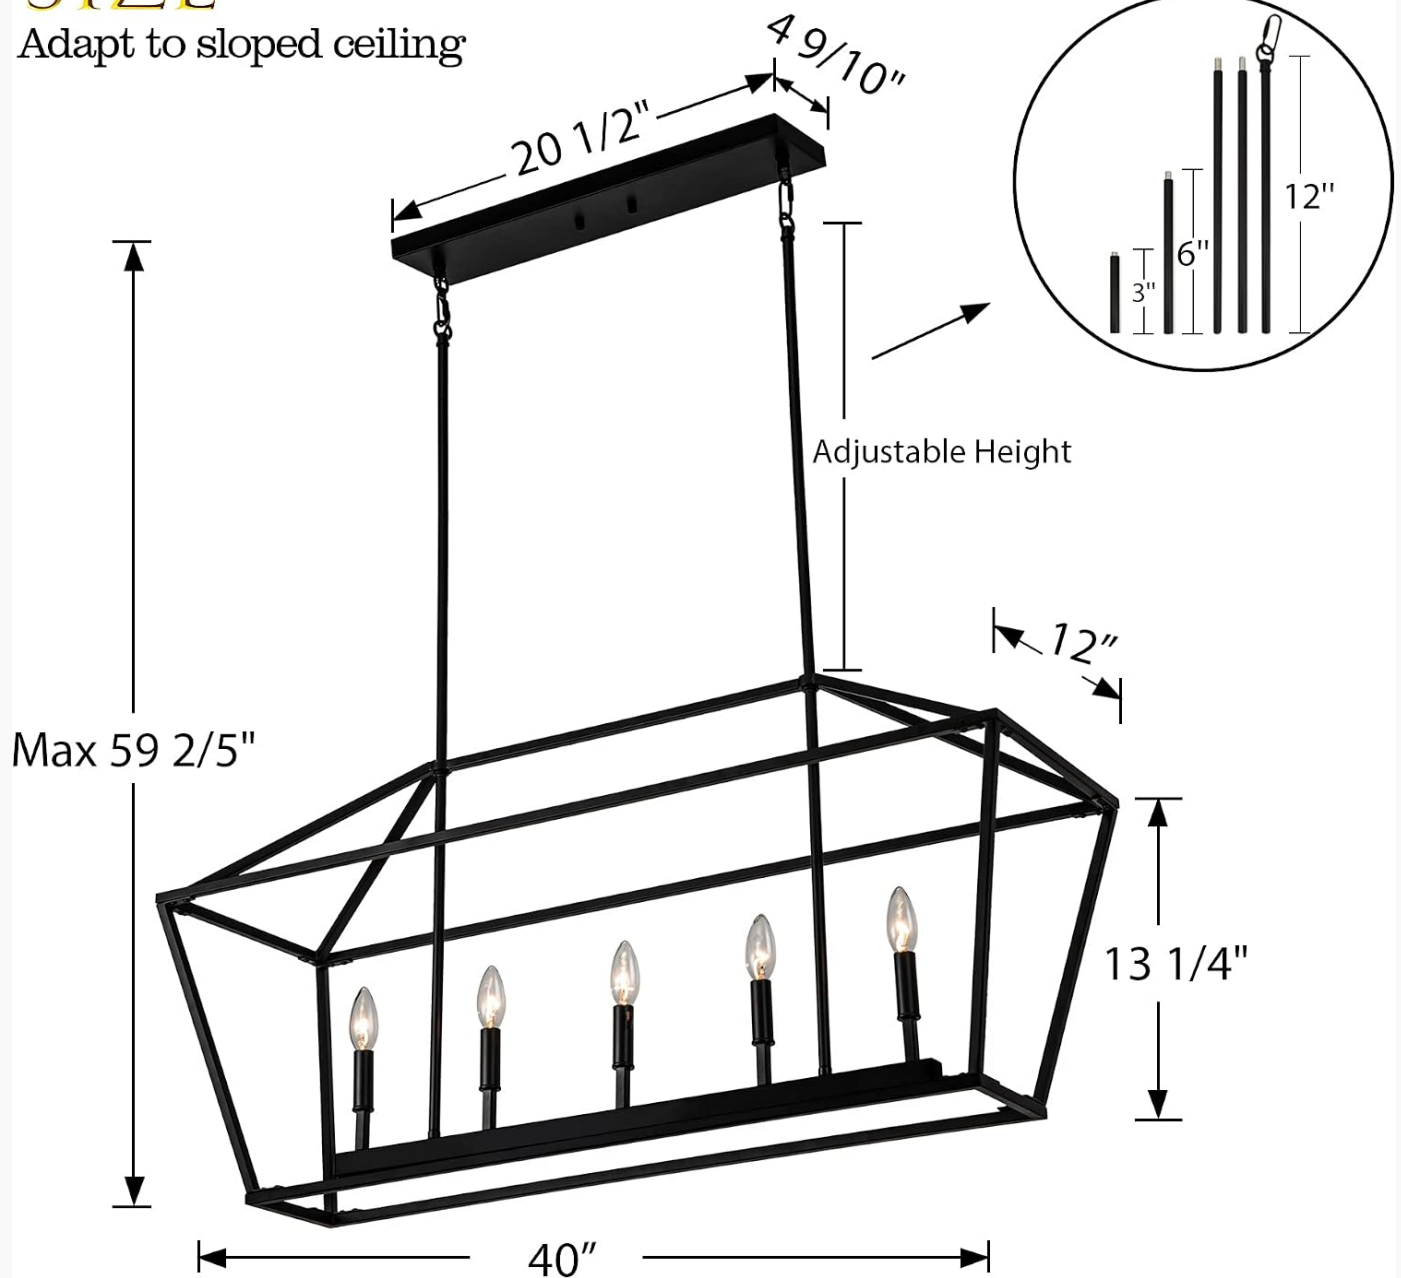


Image: Diagram illustrating adjustable height options with different stem lengths.

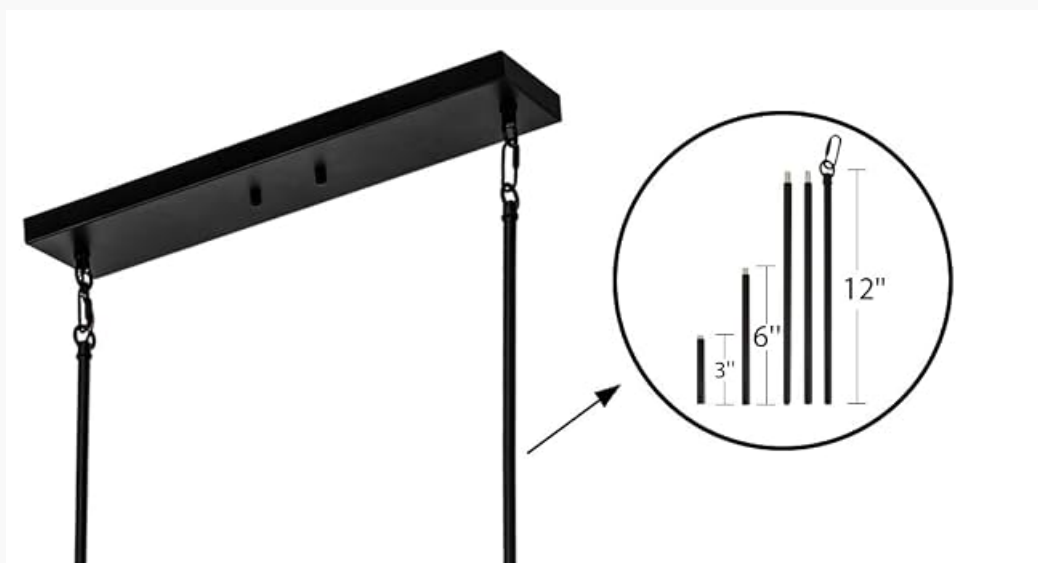


Image: Detail of the adjustable hard stems.

3. Mounting the Fixture

Attach the mounting bracket to the ceiling junction box. Connect the fixture's wires to the household wiring according to the provided wiring diagram in the manual. Secure the canopy to the mounting bracket.



Image: The fixture is compatible with various ceiling types including sloped, flat, and vaulted ceilings.

4. Installing Bulbs

This fixture requires 5 E12 (candelabra-base) bulbs, with a maximum wattage of 60W each. Bulbs are not included. Screw the bulbs firmly into the sockets.



Image: Close-up of the E12 bulb sockets.



Bulb Type

5xE12 Base, 60W Max for each

Compatible Bulb: LED /CFL/Incandescent

(Bulb not included)



Image: Examples of compatible E12 bulb types.

Installation Video

Your browser does not support the video tag.


Video: This video provides a visual overview of the Untrammelife 5-Light Linear Pendant Light, showcasing its design and features.

Your browser does not support the video tag.

Video: A detailed video highlighting various aspects and components of the Untrammelife 5-Light Linear Pendant Light.

OPERATING INSTRUCTIONS

Once installed and bulbs are in place, restore power at the circuit breaker. The fixture is operated via a standard wall switch. If connected to a compatible dimmer switch, you can adjust the light intensity. Ensure your bulbs are also dimmable if using a dimmer switch.

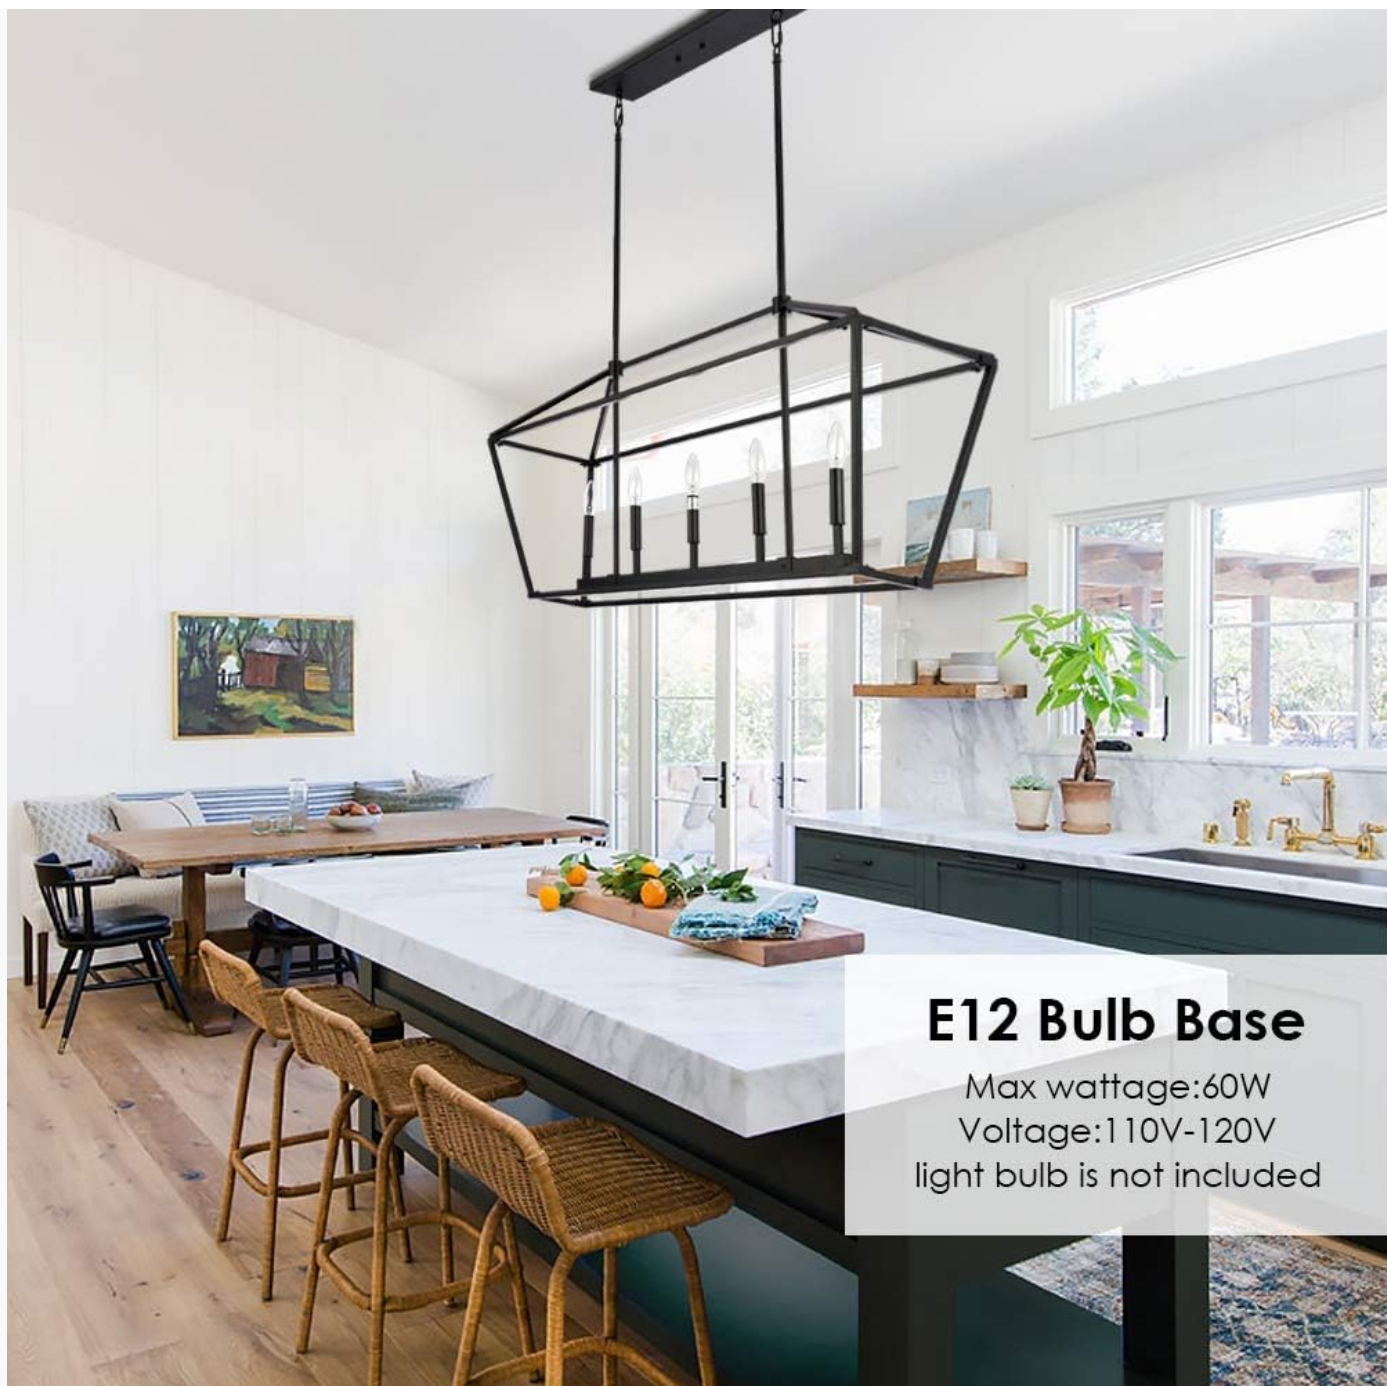

E12 Bulb Base

Max wattage:60W

Voltage:110V-120V

light bulb is not included

Image: The pendant light illuminating a kitchen island.



Image: The pendant light in a dining room setting.

MAINTENANCE

Cleaning

- Always turn off power to the fixture and allow it to cool before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.

Bulb Replacement

- Ensure power is off at the circuit breaker.
- Allow old bulbs to cool completely before touching.
- Unscrew the old bulb and replace with a new E12 (candelabra-base) bulb, not exceeding 60W.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on	1. Power is off. 2. Loose wiring connection. 3. Faulty bulb.	1. Check circuit breaker and wall switch. 2. Turn off power, check all wiring connections. 3. Replace bulb with a known working one.
Light flickers	1. Loose bulb. 2. Incompatible dimmer switch/bulb. 3. Loose wiring.	1. Tighten bulbs. 2. Ensure both bulbs and dimmer are compatible. 3. Turn off power, check wiring connections.
Fixture hums	Incompatible dimmer switch.	Replace dimmer switch with one compatible with your bulb type (e.g., LED dimmer for LED bulbs).

WARRANTY AND SUPPORT

This product comes with a stated 3-year manufacturer warranty. For specific details regarding warranty coverage, claims, or technical support, please refer to the warranty card included in your package or contact Untrammelife customer service directly.

If you have any questions or require assistance, please contact us. We are committed to providing satisfactory solutions.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

