

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

› [HUANUO](#) /

› [HUANUO Non-VESA Monitor Adapter Kit for 17-27 inch OLED LCD Screens](#)

HUANUO B087PFSTR2

HUANUO Non-VESA Monitor Adapter Kit Instruction Manual

Model: B087PFSTR2

INTRODUCTION

The HUANUO Non-VESA Monitor Adapter Kit is designed to convert monitors without VESA mounting holes into VESA-compatible displays. This allows you to attach your non-VESA monitor to a VESA monitor arm or stand, enhancing your workspace flexibility and ergonomics. This kit supports most flat OLED, LED, and LCD screens ranging from 17 to 27 inches.

PACKAGE CONTENTS

Please verify that all components are present before beginning installation:

- Mounting Plate
- M5 Screws
- M6 Screws
- Wrench
- Monitor Bracket Clamps (Adjustable Tabs)
- Anti-Scratch Pads



Figure 1: All accessories included in the HUANUO Non-VESA Adapter Kit.

COMPATIBILITY

This adapter kit is designed for a wide range of monitors. Please review the following compatibility details:

- **Monitor Size:** Supports most flat OLED, LED, and LCD screens from 17 inches to 27 inches.
- **Monitor Thickness:** The adjustable screen tabs accommodate monitors with a thickness between 30 mm and 75 mm.
- **VESA Plate Requirement:** Your existing VESA monitor arm or stand must have a 75mm VESA plate configuration.
- **VESA Hole Diameter:** The VESA holes on your existing mount or monitor holder require a minimum diameter of 5 mm for proper installation.

Screw Selection Guide:

- For monitors less than 57 mm thick, use M5 x 40 mm screws.
- For monitors between 57 mm and 75 mm thick, use M5 x 65 mm screws.

Fit Your Monitors

Monitors **WITHOUT** VESA mounting holes



Weight Capacity
up to **6.5 KG**

Good Choice for **17"-27"** Monitors



Figure 2: The adapter supports monitors from 17 to 27 inches with a maximum weight capacity of 6.5 KG.

Adjustable to Fit Your Monitors

Fit monitor thickness from **3 cm - 7.5 cm**




Adjustable Tab

Figure 3: Adjustable tabs allow fitting monitors with thickness from 3 cm to 7.5 cm.

Adjustable to Fit Your Monitors

Fit Most 17"-27" Monitors

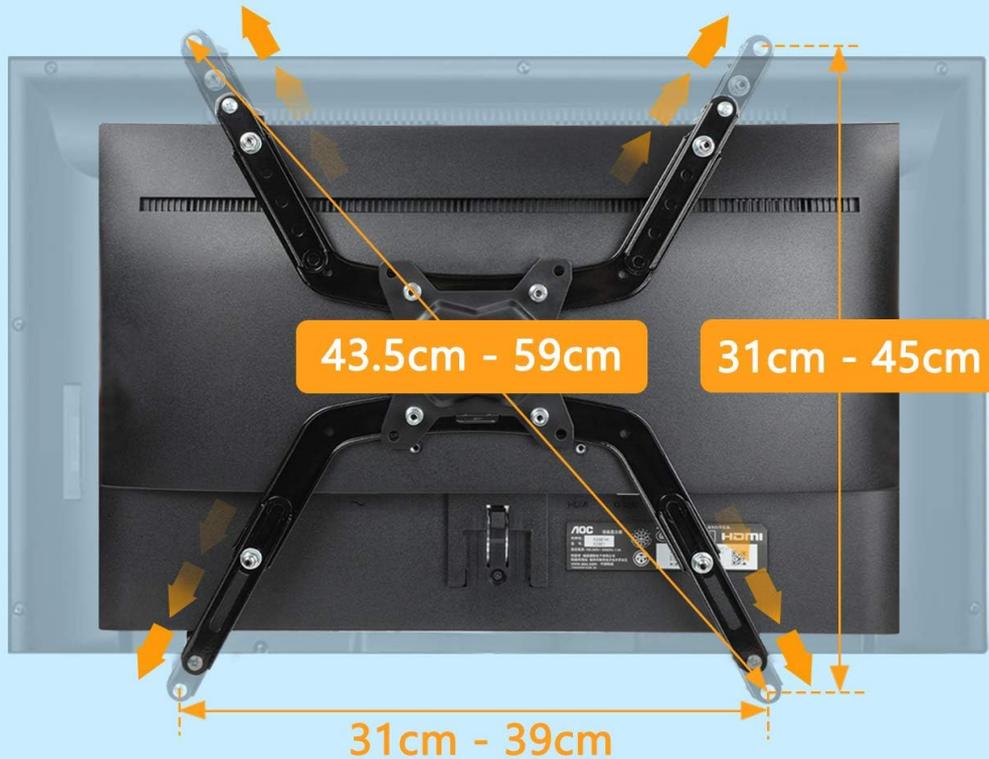

Diagonal length from 43.5cm - 59cm
Adjustable height 31cm - 45cm

Figure 4: The adapter's adjustable dimensions: diagonal length from 43.5 cm - 59 cm, adjustable height from 31 cm - 45 cm.

SETUP AND INSTALLATION

Follow these detailed steps for a quick and simple installation. The entire process can typically be completed within 10 minutes.

1. **Assemble the Adapter Arms:** Attach the adjustable arms to the central mounting plate using the provided screws and wrench. Ensure all connections are secure.
2. **Attach Anti-Scratch Pads:** Apply the anti-scratch pads to the inner surfaces of the adapter arms where they will contact your monitor. This protects your monitor from damage.
3. **Position Monitor:** Carefully place your monitor onto the assembled adapter. Adjust the arms to securely grip the top and bottom edges of your monitor.
4. **Secure Monitor:** Tighten the screws on the adjustable tabs to firmly hold the monitor in place. Do not overtighten.
5. **Mount to VESA Arm:** Align the adapter's 75mm VESA plate with your existing VESA monitor arm or stand. Secure it using the appropriate M5 or M6 screws provided with your monitor arm (or the adapter kit if compatible).

Suits for Your Monitor Bracket

The 75 x 75 mm VESA plate is needed



Figure 5: Step-by-step guide for assembling and attaching the adapter to your monitor.

Non-VESA Adapter

Mount non-VESA monitor to VESA stand



Figure 6: The HUANUO Non-VESA Adapter mounted on a monitor arm, holding a monitor.

Guide of Installation

Quick and Simple



Figure 7: Side view of a monitor securely attached to a monitor arm using the Non-VESA adapter.

Installation Video Guide

Your browser does not support the video tag.

Video 1: A general guide demonstrating the installation process for a non-VESA monitor adapter. While this video is for a related product, it illustrates the common steps involved in mounting a non-VESA monitor.

OPERATING INSTRUCTIONS

Once installed, the HUANUO Non-VESA Monitor Adapter Kit functions as a secure interface between your monitor and a VESA-compatible mount. There are no specific operational controls for the adapter itself. Your monitor's functionality and the adjustments of your VESA mount will operate as usual.

MAINTENANCE

The HUANUO Non-VESA Monitor Adapter Kit requires minimal maintenance. Follow these guidelines to ensure its longevity:

- **Cleaning:** Wipe the adapter with a soft, dry cloth to remove dust. Avoid abrasive cleaners or solvents.
- **Tightness Check:** Periodically check all screws and connections to ensure they remain tight and secure.

Retighten if necessary, but do not overtighten.

- **Damage Inspection:** Inspect the adapter for any signs of wear or damage. If any component is damaged, discontinue use and contact customer support.

TROUBLESHOOTING

If you encounter issues during installation or use, consider the following:

- **Monitor Not Secure:** Ensure the adjustable tabs are tightened sufficiently to grip the monitor. Verify that the correct screw lengths (M5 x 40mm or M5 x 65mm) were used based on your monitor's thickness.
- **Adapter Not Fitting Monitor:** Double-check your monitor's size and thickness against the compatibility specifications (17-27 inches, 30-75mm thickness).
- **Adapter Not Attaching to VESA Arm:** Confirm that your VESA arm has a 75mm VESA plate and that its VESA holes have a minimum diameter of 5mm. Ensure you are using the correct screws for attachment.
- **Scratches on Monitor:** Verify that the anti-scratch pads are correctly applied to all contact points between the adapter and your monitor.

For further assistance, please refer to the support information provided in the Warranty and Support section.

SPECIFICATIONS

Feature	Specification
Brand	HUANUO
Model	B087PFSTR2
Material	Alloy Steel
Color	Black
Minimum Compatible Monitor Size	17 inches
Maximum Compatible Monitor Size	27 inches
Monitor Thickness Compatibility	30 mm to 75 mm
VESA Compatibility	75mm VESA plate required on existing mount
Mounting Type	Fits both monitor desk mount or monitor wall mount
Movement Type	Articulated (referring to the monitor arm it attaches to)

WARRANTY AND SUPPORT

This product is manufactured with quality engineering to ensure durability. If you have any questions regarding installation, compatibility, or require further assistance, please contact our customer support. We are committed to providing detailed instructions and support to ensure your satisfaction.

Please refer to your purchase documentation or the retailer's website for specific warranty terms and contact information.

