

## Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

> [VONLUCE](#) /

> [VONLUCE 4-Light Bathroom Vanity Light \(Model BVL-GLW4\) Instruction Manual](#)

## VONLUCE BVL-GLW4

# VONLUCE 4-Light Bathroom Vanity Light (Model BVL-GLW4) Instruction Manual

This manual provides detailed instructions for the safe installation, operation, and maintenance of your VONLUCE 4-Light Bathroom Vanity Light.

## IMPORTANT SAFETY INFORMATION

---

Please read and understand all instructions before beginning installation. Failure to do so may result in electric shock, fire, or other injuries that could be fatal or cause property damage.

- Always disconnect power at the main circuit breaker before installation or maintenance.
- Consult a qualified electrician if you are unsure about the installation process.
- Use only bulbs of the specified type and wattage.
- Do not exceed the maximum wattage for the fixture (60W per bulb, 240W total).
- Ensure all electrical connections are secure and comply with local codes.
- This fixture is designed for indoor use only and is not water-resistant.

## PACKAGE CONTENTS

---


Verify that all components are present and undamaged before proceeding with installation.

- VONLUCE 4-Light Bathroom Vanity Light Fixture (Model BVL-GLW4)
- Clear Glass Shades (4 pieces)
- Mounting Hardware Kit
- Instruction Manual

*Note: E26 base bulbs are not included and must be purchased separately.*

## PRODUCT SPECIFICATIONS

<b>Brand</b>	VONLUCE
<b>Model Number</b>	BVL-GLW4
<b>Color</b>	Black
<b>Material</b>	Glass, Metal
<b>Style</b>	Modern
<b>Product Dimensions</b>	30"L x 10"W x 6"H
<b>Number of Lights</b>	4
<b>Bulb Base</b>	E26
<b>Max Wattage (per bulb)</b>	60 Watts
<b>Max Wattage (total)</b>	240 Watts
<b>Power Source</b>	Hardwired
<b>Installation Type</b>	Wall Mount
<b>Special Features</b>	Anti-Rust, Dimmable
<b>Voltage</b>	120 Volts

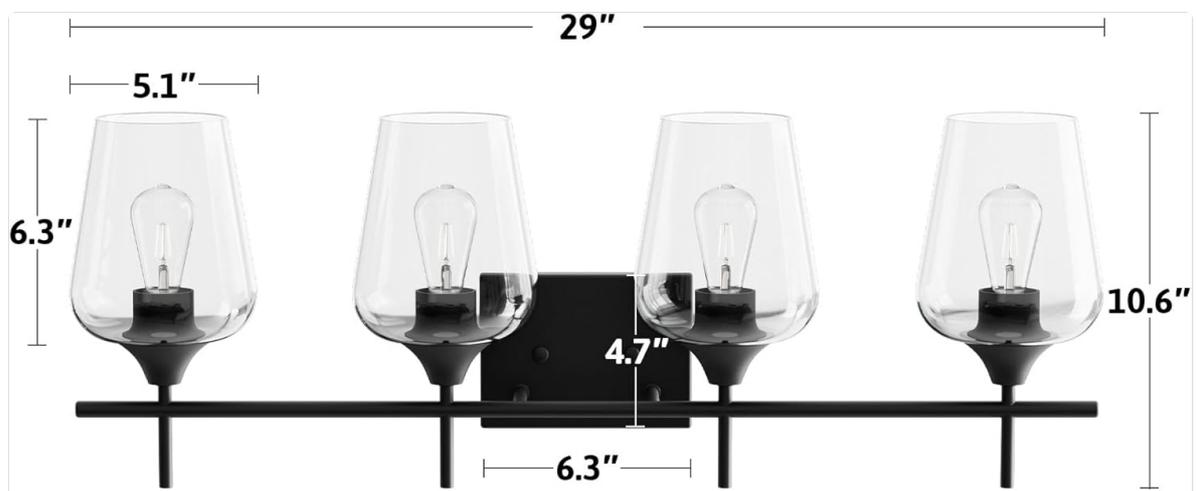

## COMPATIBLE WITH E26 BASE BULBS



E26 Sockets



60W Max. Wattage



Corrosion Resistance



Bulbs Not Included

Figure 1: Product Dimensions (29 inches wide, 10.6 inches high, 5.1 inches deep for shades).

## INSTALLATION INSTRUCTIONS

This fixture is designed for easy hardwired installation. Follow these steps carefully.

### 1. Pre-Installation

1. Turn off power at the circuit breaker.
2. Unpack all parts and inspect for damage.
3. Ensure you have all necessary tools (screwdriver, wire strippers, electrical tape, etc.).

### 2. Mounting the Fixture

1. Attach the mounting bracket to the junction box using the provided screws.
2. Connect the fixture's ground wire to the house ground wire (usually bare copper or green) using a wire nut.
3. Connect the fixture's white wire to the house white (neutral) wire using a wire nut.
4. Connect the fixture's black wire to the house black (live) wire using a wire nut.
5. Carefully tuck all wires into the junction box.
6. Align the fixture's backplate with the mounting bracket and secure it with the decorative nuts or screws.



Figure 2: Detail of the fixture's backplate and design.

### 3. Attaching Glass Shades and Bulbs

1. Carefully screw the clear glass shades onto the lamp holders. Do not overtighten.
2. Insert E26 base bulbs (max 60W each, not included) into the sockets.



## CLEAR GLASS SHADES

Figure 3: Clear glass shades for even light diffusion.

### **OPERATING YOUR LIGHT FIXTURE**

---

Once installed, restore power at the circuit breaker. The light fixture operates via your standard wall switch. This fixture is dimmable when used with compatible dimmable E26 bulbs and a dimmer switch.



Figure 4: Light fixture in off and on states.

Your browser does not support the video tag.

Video 1: Official product overview showcasing the VONLUCE 4-Light Bathroom Vanity Light in a bathroom setting, highlighting its modern design and lighting capabilities.

## MAINTENANCE AND CARE

---

- **Cleaning:** Always turn off power before cleaning. Wipe the fixture with a soft, dry cloth. Do not use abrasive cleaners or solvents, as they may damage the finish or glass.
- **Bulb Replacement:** Ensure power is off. Allow bulbs to cool before touching. Unscrew the old bulb and replace it with a new E26 base bulb (max 60W).
- **Inspection:** Periodically check all connections and mounting hardware for tightness.

## TROUBLESHOOTING

---

Problem	Possible Cause	Solution
Light does not turn on.	<ol style="list-style-type: none"><li>1. Power is off.</li><li>2. Loose wiring connection.</li><li>3. Faulty bulb.</li></ol>	<ol style="list-style-type: none"><li>1. Check circuit breaker and wall switch.</li><li>2. Turn off power, check wiring connections.</li><li>3. Replace bulb.</li></ol>
Flickering light.	<ol style="list-style-type: none"><li>1. Loose bulb.</li><li>2. Incompatible dimmer switch/bulb.</li><li>3. Loose wiring.</li></ol>	<ol style="list-style-type: none"><li>1. Tighten bulb.</li><li>2. Ensure dimmer and bulbs are compatible.</li><li>3. Turn off power, check wiring connections.</li></ol>
Fixture is hot to touch.	Bulb wattage too high.	Replace bulbs with lower wattage, ensuring they do not exceed 60W per bulb.

## WARRANTY AND SUPPORT

---

This VONLUCE product comes with a Limited Warranty. For specific warranty details, claims, or technical support, please refer to the warranty card included with your purchase or contact VONLUCE customer service.

For further assistance, please visit the official VONLUCE store: [VONLUCE Store on Amazon](#).