

Siljoy Modern Rectangle Crystal Chandelier (ASIN: B088PL9X27)

Siljoy Modern Rectangle Crystal Chandelier User Manual

Model: Modern Rectangle Crystal Chandelier (ASIN: B088PL9X27)

INTRODUCTION

This user manual provides detailed instructions for the installation, operation, and maintenance of your Siljoy Modern Rectangle Crystal Chandelier. Please read this manual thoroughly before installation and retain it for future reference.

Package Contents

- 1 x Chandelier
- 1 x Instruction Manual (this document)
- 1 x Hardware Bag (containing mounting accessories)

SAFETY INFORMATION

Always turn off the main power supply at the circuit breaker before beginning any installation or maintenance. Consult a qualified electrician if you are unsure about any part of the installation process. Ensure all wiring connections are secure and comply with local electrical codes.

SETUP AND INSTALLATION

Follow these steps for proper installation of your chandelier. It is recommended to have two people for installation due to the weight and size of the fixture.

Tools Required (Not Included)

- Screwdriver (Phillips and Flathead)
- Wire Strippers
- Electrical Tape
- Ladder
- Drill (if new mounting holes are required)

Installation Steps

1. **Prepare for Installation:** Turn off power at the main circuit breaker. Ensure the power is completely off before proceeding.
2. **Mount the Bracket:** Attach the mounting bracket from the hardware bag to your ceiling junction box. Ensure it is securely fastened. The design is suitable for standard US junction boxes, including flat and sloped ceilings.

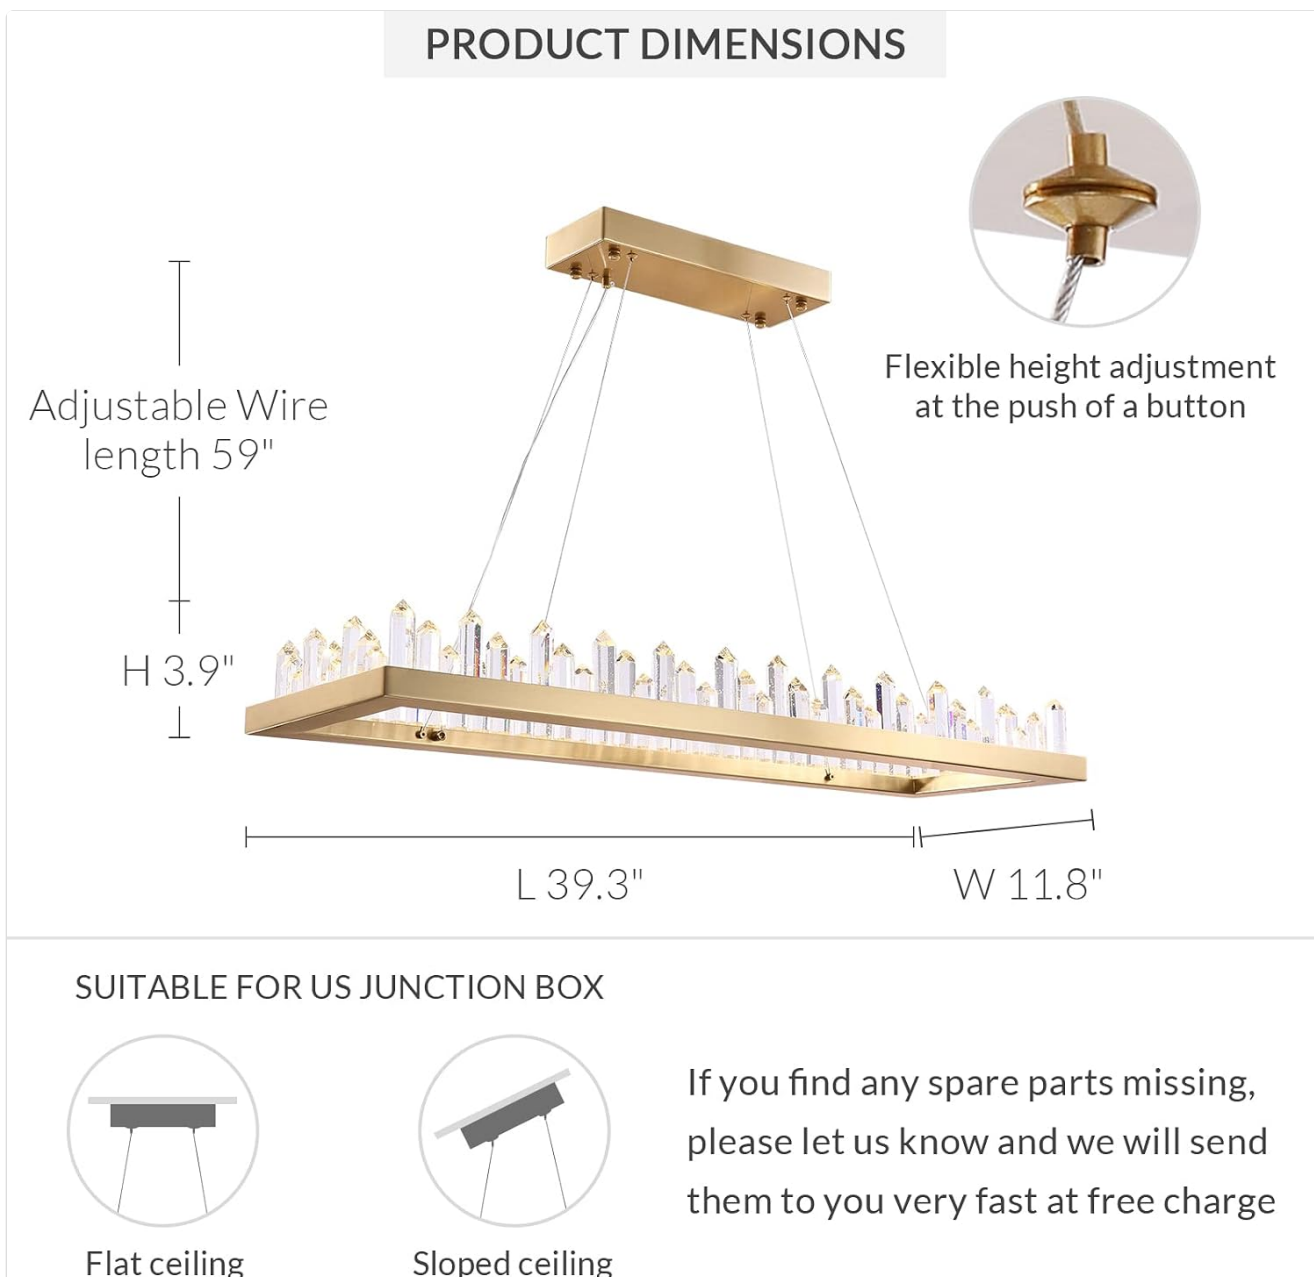


Figure 1: Product dimensions and ceiling compatibility. The image illustrates the chandelier's length (39.3"), width (11.8"), and height (3.9"), along with an adjustable wire length of 59". It also shows diagrams for flat and sloped ceiling installations, indicating compatibility with US junction boxes.

3. **Adjust Hanging Height:** The chandelier features an adjustable wire length up to 59 inches (100cm). Adjust the hanging height by pushing the button on the canopy and sliding the wires to your desired length. Ensure all wires are of equal length for a level fixture.



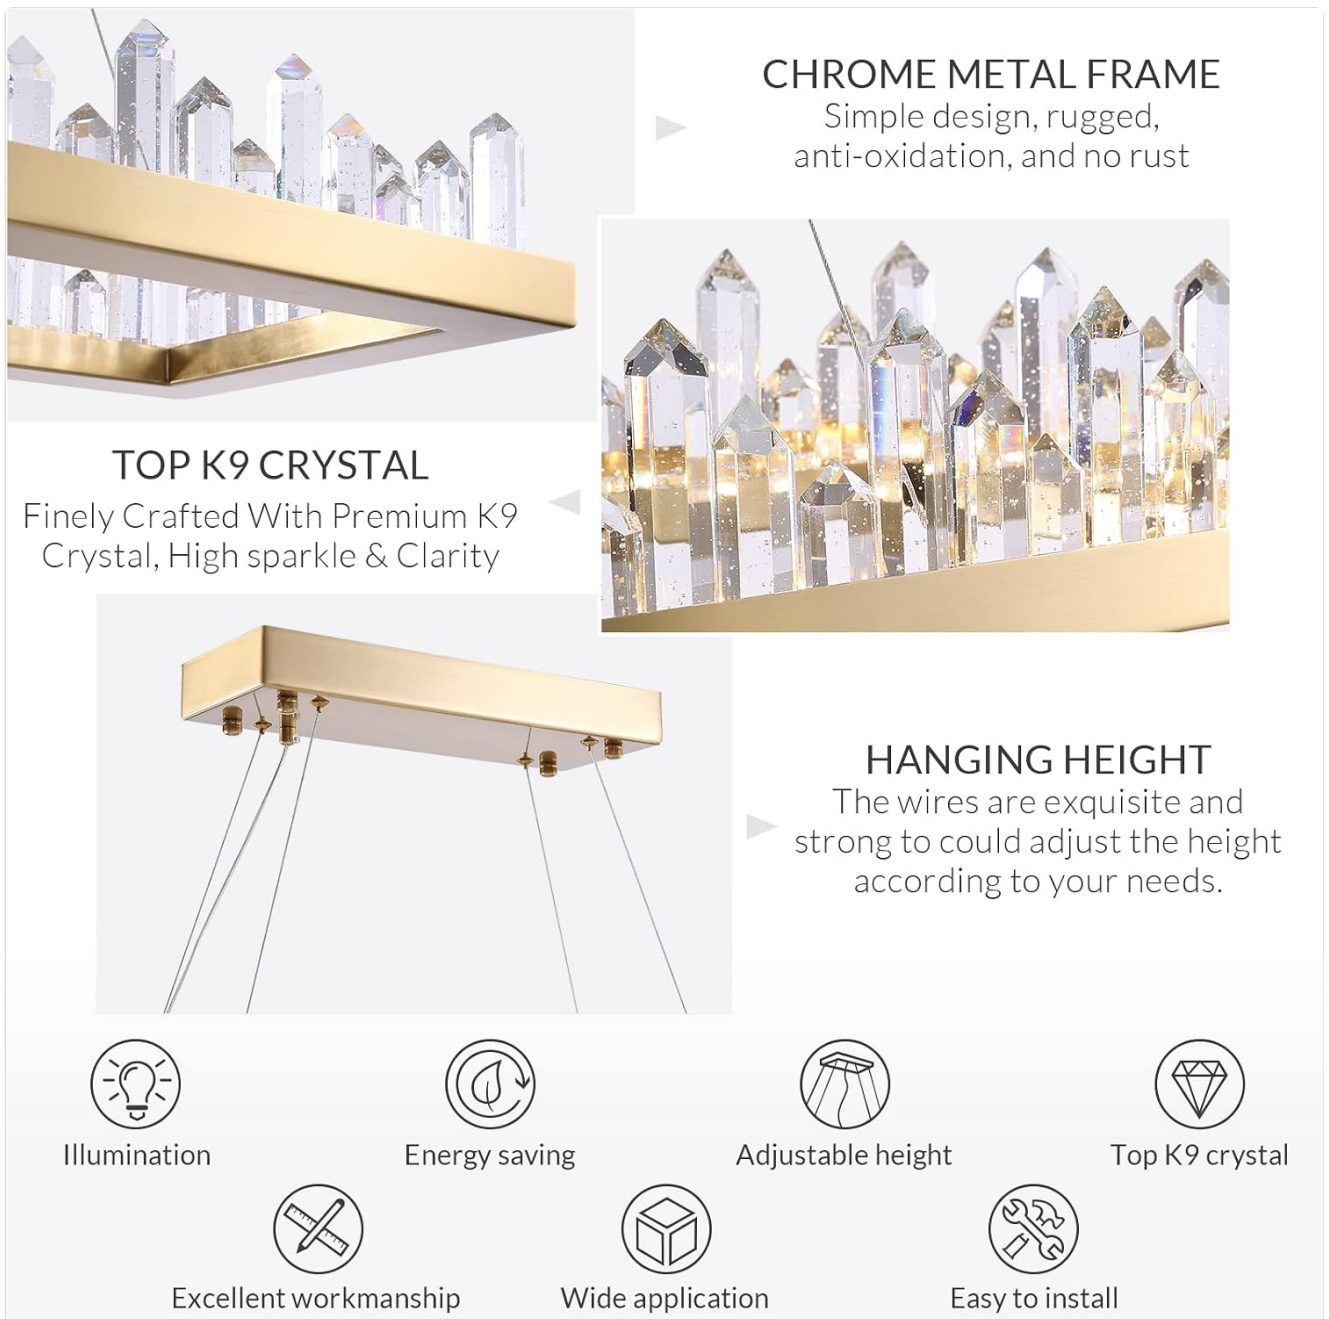


Figure 2: Detail of the chandelier's components. This image highlights the finely crafted K9 crystal, the robust chrome metal frame, and the adjustable hanging wires, emphasizing the quality and flexibility of the design.

4. **Wire Connections:** Connect the chandelier's wires to your household electrical wires according to standard electrical codes (Live to Live, Neutral to Neutral, Ground to Ground). Use wire nuts to secure connections and electrical tape for added insulation.
5. **Secure the Canopy:** Carefully push the chandelier's canopy up to the ceiling and secure it to the mounting bracket using the provided screws.
6. **Install Crystals:** The chandelier comes with K9 crystals. Carefully attach each crystal to the fixture. Ensure proper placement for optimal light dispersion. The crystals can be placed "angle to angle" or "plane to plane" to achieve the desired fit.



Angle to Angle



Plane to Plane

How to place the Crystal?

If you feel that some crystals missing after placing them plane to plane, please try to change the placement of the crystals, you need to place them angle to angle. So, it will fit perfectly.



Figure 3: Crystal placement guide. This diagram shows two methods for attaching the K9 crystals: "Angle to Angle" and "Plane to Plane," advising users to try "Angle to Angle" if "Plane to Plane" leaves gaps.

7. **Restore Power:** Once installation is complete and all connections are secure, restore power at the circuit breaker.

OPERATING INSTRUCTIONS

Your Siljoy Chandelier features an integrated LED light strip with 3-color changing capabilities.

Changing Light Color Temperature

The chandelier allows you to switch between three color temperatures: Warm White (3000K), Neutral White (4500K), and Cool White (6000K). To change the color temperature, simply use your standard wall switch. Continuously and quickly switching the wall control ON and OFF will cycle through the available color temperatures.


VARIABLE LIGHT



Warm White(3000K)



Neutral White(4500K)

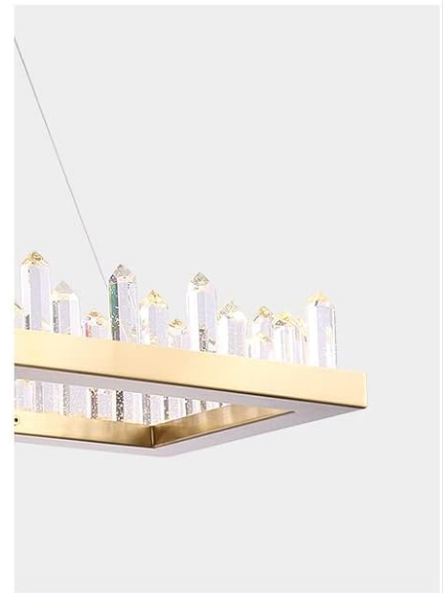



Cool White(6000K)



3-COLOR CHANGEABLE

Only can use the switch to change color, You can change the color temperature by continuously and quickly switching the wall control.

Figure 4: Variable light temperatures. This image displays the chandelier illuminated in Warm White (3000K), Neutral White (4500K), and Cool White (6000K), demonstrating the 3-color changing capability.

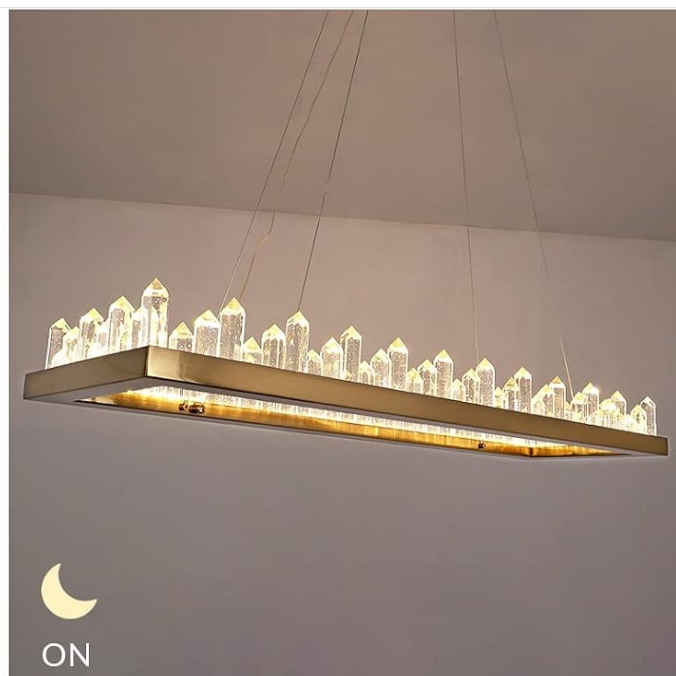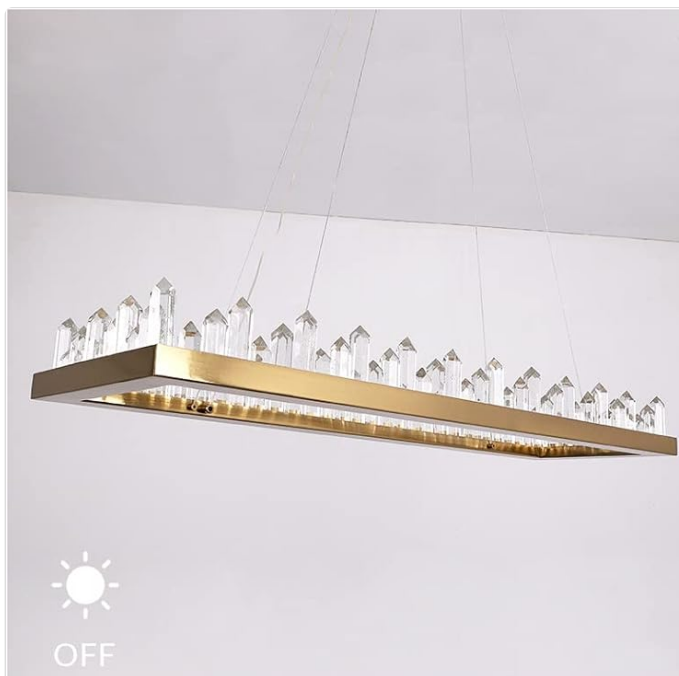

Voltage: AC110V-120V

Built-in 3-color changing led light strip



The light is bright, soft,
and not dazzling



The light is dim,
inferior quality

Figure 5: Light quality comparison. This image contrasts the desired light output (bright, soft, and not dazzling) with an undesirable outcome (dim, inferior quality), emphasizing the quality of the built-in LED strip.

MAINTENANCE

Regular maintenance will help preserve the beauty and functionality of your chandelier.

- **Cleaning:** Turn off the power before cleaning. Use a soft, dry cloth to wipe the metal frame. For the K9 crystals, a slightly damp cloth with mild glass cleaner can be used, then dry immediately with a clean, lint-free cloth. Avoid abrasive cleaners or solvents.
- **Crystal Care:** Periodically check that all crystals are securely attached. If any become loose, gently re-secure them.
- **Bulb Replacement:** The chandelier features integrated LED bulbs. These are designed for long life and typically do not require replacement. If an issue arises with the LED strip, please contact customer service.

TROUBLESHOOTING

If you encounter issues with your chandelier, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
Chandelier does not light up.	No power supply; Loose wiring connection; Faulty wall switch.	Check circuit breaker. Ensure all wire connections are secure. Test wall switch functionality.
Light flickers or is dim.	Loose wiring; Incorrect voltage; Damaged LED strip.	Verify all connections are tight. Ensure voltage matches product specifications (AC110V-120V). Contact customer service if LED strip is suspected to be damaged.
Crystals appear uneven or sparse.	Incorrect crystal placement.	Refer to the "Install Crystals" section in Setup for proper placement techniques (Angle to Angle vs. Plane to Plane).
Chandelier is not level.	Uneven wire length.	Adjust the hanging wires to ensure they are all of equal length.

SPECIFICATIONS

Feature	Detail
Brand	Siljoy
Model	Modern Rectangle Crystal Chandelier
Material	Polished Metal, K9 Crystal
Color	Gold base, Crystal shade
Dimensions (L x W x H)	39.3" x 11.8" x 3.9" (99.82 x 29.97 x 9.91 cm)
Weight	Approx. 26 lbs (11.79 kg)
Light Source	Integrated LED (Included)
Color Temperature	3000K (Warm White), 4500K (Neutral White), 6000K (Cool White)
Adjustable Cable Height	Up to 39.3" (100 cm)
Power Source	AC110V-120V
Installation Type	Suspension Mounting
Manufacturer	ChandelierLand
ASIN	B088PL9X27

WARRANTY AND SUPPORT

Your Siljoy Modern Rectangle Crystal Chandelier comes with a one-year limited warranty against defects in materials and workmanship from the date of purchase.

For any problems related to transportation, installation, or product defects, please contact our after-sale service team.

Please have your purchase information and product model ready when contacting support.

Contact Information: Please refer to your purchase documentation or the retailer's website for specific contact details for customer support.

© 2024 Siljoy. All rights reserved.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question