

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

[manuals.plus](#) /

› [Hotmoon](#) /

› [Hotmoon Smart Light Bulb User Manual \(Model HM-LB07-RGBW-US-4-B\)](#)

Hotmoon HM-LB07-RGBW-US-4-B

Hotmoon Smart Light Bulb User Manual

Model: HM-LB07-RGBW-US-4-B

INTRODUCTION

Welcome to your new Hotmoon Smart Light Bulbs. These RGBW LED bulbs offer 16 million colors, warm white (2700K), and smart control features. This manual provides detailed instructions for installation, operation, and troubleshooting to ensure optimal performance and a seamless smart lighting experience.

IMPORTANT SAFETY INFORMATION

- Read all instructions before installation and use.
- Do not use with dimmers other than those controlled by the Smart Life app or compatible voice assistants.
- Ensure power is off at the switch before installing or removing the bulb.
- Suitable for indoor use in dry locations only.
- Operating voltage: 100-240V AC.
- Do not expose to water or moisture.

PACKAGE CONTENTS

- 4 x Hotmoon 9W Smart LED Light Bulbs
- 1 x User Manual

SPECIFICATIONS

Wattage	9W
Luminous Flux	900LM
Color Temperature	2700K + RGB
Bulb Type	A19

Base Type	E26
Input Voltage	100-240V AC
Wireless Type	2.4GHz Wi-Fi (5GHz not supported)
Average Life	Approximately 20,000 hours
Control Method	App (Smart Life), Voice (Alexa, Google Home), IFTTT
Certifications	CE, FCC

SETUP GUIDE

1. Physical Installation

1. Ensure the power switch to the light fixture is in the OFF position.
2. Carefully screw the smart bulb into a standard E26 light socket.
3. Turn on the power switch to the light fixture. The bulb should light up.

2. Download the Smart Life App


- Search for "Smart Life" in your mobile device's app store (iOS App Store or Google Play Store).
- Download and install the app.
- Register a new account or log in if you already have one.

3. Pair the Smart Bulb with Wi-Fi

1. Open the Smart Life app on your mobile device.
2. Tap the "+" icon in the top right corner or select "Add Device".
3. Navigate to "Lighting" and select "Light Source (Wi-Fi)".
4. Ensure the smart bulb is blinking rapidly. If it is not, turn the light switch OFF-ON-OFF-ON-OFF-ON (3 cycles) to reset the bulb until it blinks rapidly.
5. Confirm the bulb is blinking rapidly in the app.
6. Enter your 2.4GHz Wi-Fi network name and password. **Note: 5GHz Wi-Fi networks are not supported.** Ensure your phone is connected to the 2.4GHz network during this process.
7. Follow the on-screen instructions in the app to complete the pairing process. Once connected, you can rename your bulb for easier control.

Schedule On/Off

- 🌙 Help you get asleep at night
- ☀️ Wake you up in the morning

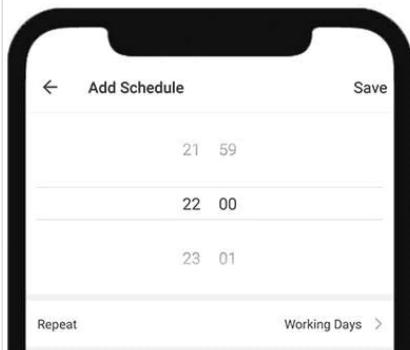

Group Control Available

One touch control all bulbs



Image: Smart Life App interface for scheduling and group control.

4. Connect to Voice Assistants (Optional)

- **For Amazon Alexa:**

- Open the Amazon Alexa app.
- Go to "Skills & Games", search for "Smart Life".
- Enable the skill and link your Smart Life account using your Smart Life app credentials.
- Discover devices. Alexa will find your smart bulbs.

- **For Google Home:**

- Open the Google Home app.
- Tap the "+" icon -> "Set up device" -> "Works with Google".
- Search for "Smart Life" and link your account using your Smart Life app credentials.



Voice Control

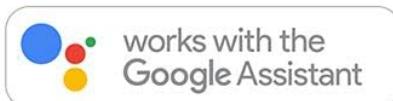


Image: Voice control integration with Amazon Alexa and Google Assistant.

OPERATING INSTRUCTIONS

1. Basic Control via Smart Life App

- **On/Off:** Tap the bulb icon in the app to toggle power.
- **Brightness:** Adjust the slider to set the desired brightness level (0-100%).
- **Color Changing:** Select from 16 million colors using the intuitive color wheel.
- **Warm White:** Adjust the color temperature slider to achieve various shades of warm white light (2700K).
- **Scene Modes:** Choose from 8 pre-set scene modes (e.g., Night, Read, Meeting, Leisure, Soft, Rainbow, Shine, Gorgeous) to instantly change the room's atmosphere.

Warm White Mode



Colour Mode



Scene Mode

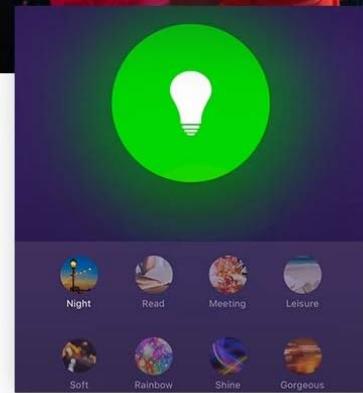


Image: Smart Life App interface demonstrating Warm White, Color, and Scene modes.



Image: Example of 16 million colors and 8 lighting scenes in a room setting.

2. Voice Control

Once connected to Amazon Alexa or Google Home, you can control your smart bulbs using simple voice commands:

- "Alexa, turn on the [Bulb Name]."
- "Hey Google, set the [Bulb Name] to blue."
- "Alexa, dim the [Bulb Name] to 50%."
- "Hey Google, change [Bulb Name] to warm white."


3. Timer and Schedule Functions

Utilize the Smart Life app to set custom schedules and timers for your bulbs:

- **Schedule:** Program your lights to turn on or off at specific times, such as waking you up in the morning or turning off when you leave home.
- **Timer:** Set a countdown timer for the light to turn off after a specified duration.

4. Group Control

The Smart Life app allows you to group multiple smart bulbs together. This enables you to control all grouped bulbs simultaneously with a single command, creating a unified lighting experience for a room or area.

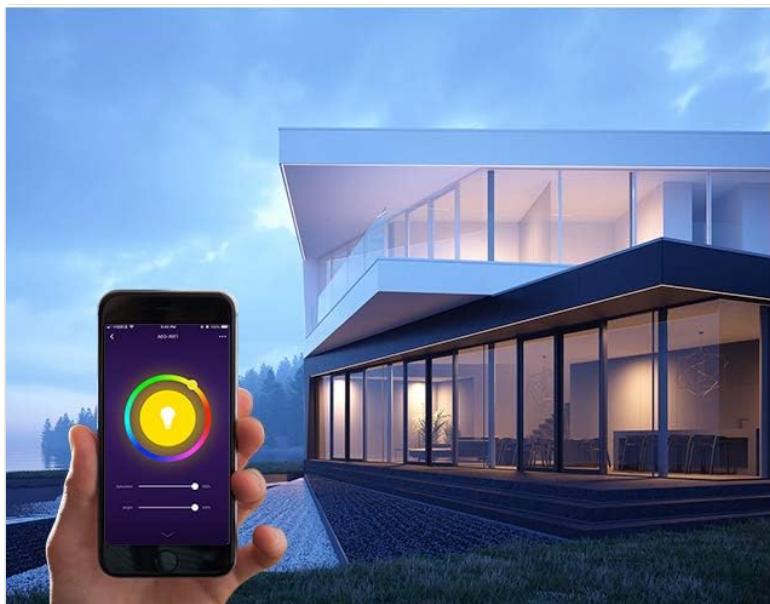

Remote Control

Control from anywhere

Group Control

One touch control all bulbs



Image: Remote control and group control functionality via the Smart Life App.

MAINTENANCE

- Clean the bulb with a soft, dry cloth only. Do not use liquid cleaners or abrasive materials.
- There are no user-serviceable parts inside the bulb. Do not attempt to disassemble or repair the product.
- Ensure the bulb is cool before handling or cleaning.

TROUBLESHOOTING

• Bulb not pairing/connecting to Wi-Fi:

- Ensure your Wi-Fi network is 2.4GHz. 5GHz networks are not supported.
- Check the Wi-Fi signal strength near the bulb. Move the bulb closer to your router if necessary.

- Reset the bulb by cycling the power switch OFF-ON-OFF-ON-OFF-ON (3 cycles) until it blinks rapidly, then attempt pairing again.
- Ensure your mobile device is connected to the same 2.4GHz Wi-Fi network during the pairing process.

- **Voice control not working:**

- Verify that the Smart Life skill/service is enabled and correctly linked to your Amazon Alexa or Google Home account.
- Ensure the device names in the Smart Life app match the names you are using for voice commands.
- Try rediscovering devices in your Alexa or Google Home app.

- **Bulb not responding or showing incorrect colors:**

- Check the bulb's power supply by turning the light switch off and on.
- Try resetting the bulb by cycling power (OFF-ON-OFF-ON-OFF-ON).
- Ensure the Smart Life app is updated to the latest version.
- If a single bulb consistently malfunctions after troubleshooting, it may be defective.

WARRANTY AND SUPPORT

Hotmoon smart light bulbs come with a standard manufacturer's warranty. Please refer to the original purchase documentation or product packaging for specific warranty terms and duration.

For technical support, warranty claims, or any questions regarding your Hotmoon Smart Light Bulbs, please contact Hotmoon customer service through your retailer or the contact information provided with your purchase. Please have your model number (HM-LB07-RGBW-US-4-B) and proof of purchase ready when contacting support.