

Manuals+

[Q & A](#) | [Deep Search](#) | [Upload](#)

manuals.plus /

- › [Atomi Smart](#) /
- › [Atomi Smart WiFi LED Ceiling Light User Manual](#)

Atomi Smart AT1515

Atomi Smart WiFi LED Ceiling Light User Manual

Model: AT1515

INTRODUCTION

The Atomi Smart WiFi LED Ceiling Light offers advanced lighting control for your home. This smart ceiling light provides 2200 lumens of tunable and dimmable light, with a spectrum of 16 million colors. It can be controlled conveniently via the free Atomi Smart app or through voice commands using Amazon Alexa and Google Assistant. Its modern design with a brushed nickel finish ensures even light distribution and exceptional color accuracy, making it suitable for various rooms.



Image: The Atomi Smart WiFi LED Ceiling Light, showcasing its sleek design and the accompanying mobile application for control.

SETUP AND INSTALLATION

This section guides you through the process of installing your Atomi Smart WiFi LED Ceiling Light and connecting it to your home network.

What's Included

- Atomi Smart WiFi LED Ceiling Light
- Mounting Hardware
- User Manual (this document)

Before You Begin

- Ensure your WiFi network is 2.4GHz. The light does not support 5GHz networks.
- Turn off power at the circuit breaker before installation.
- Have basic electrical tools ready (screwdriver, wire strippers).

Physical Installation

1. **Turn Off Power:** Locate the circuit breaker controlling the light fixture you are replacing or installing and turn it off. Verify power is off using a voltage tester.
2. **Remove Old Fixture (if applicable):** Carefully disconnect and remove the existing ceiling light fixture.
3. **Mount Bracket:** Attach the mounting bracket to the junction box in the ceiling using the provided screws.
4. **Wire Connections:** Connect the wires from the ceiling light to your home's electrical wiring. Typically, this involves connecting:
 - Black (Live) to Black (Live)
 - White (Neutral) to White (Neutral)
 - Green or Bare Copper (Ground) to Green or Bare Copper (Ground)

Ensure all connections are secure with wire nuts.

5. **Attach Light Fixture:** Secure the Atomi Smart Ceiling Light to the mounting bracket.
6. **Restore Power:** Turn the power back on at the circuit breaker.



Image: The Atomi Smart WiFi LED Ceiling Light packaging, suggesting a quick and easy installation process.

App Setup and WiFi Connection

1. **Download Atomi Smart App:** Download the free Atomi Smart app from the App Store (iOS) or Google Play Store (Android).
2. **Create Account:** Open the app and create a new account or log in to an existing one.
3. **Add Device:** Follow the in-app instructions to add your new Atomi Smart Ceiling Light. This typically involves:
 - Selecting 'Add Device' or the '+' icon.
 - Choosing 'Lighting' or 'Ceiling Light' from the device list.
 - Ensuring the light is blinking rapidly (indicating pairing mode). If not, turn the light off and on 3 times to reset.
 - Entering your WiFi network name and password.
4. **Pairing:** The app will connect to the light. Once connected, you can rename your light for easy identification.

The Atomi Smart app

One app. All devices.

We want to make life easier so you can manage and control all your household devices using just your phone.

Our app is compatible with Amazon Alexa and Google Assistant. In other words, you can simply manage your devices through simple voice commands.



Image: A smartphone screen showing the Atomi Smart app, which is used for controlling the ceiling light.



Video: An official product video demonstrating the features and setup of the Atomi Smart Ceiling Light. This video provides a visual guide to the product's capabilities and initial configuration.

OPERATING YOUR SMART LIGHT

Once installed and connected, you can fully utilize the features of your Atomi Smart WiFi LED Ceiling Light.

App Control Features

The Atomi Smart app provides comprehensive control over your light:

- **Turn On/Off:** Toggle the light on or off remotely.
- **Adjust Brightness:** Dim or brighten the light to your desired level (fully dimmable).
- **Change White Temperature:** Select from a tunable white light range (2000K-6500K) to create warm or cool white light.
- **Color-Changing Hue:** Choose from over 16 million colors to set the perfect mood or ambiance.
- **Create/Edit Scenes and Effects:** Utilize built-in scene modes for various occasions (e.g., party, relaxation, night light).
- **Group Control:** Link and control multiple Atomi Smart Ceiling Lights together.
- **Timers and Schedules:** Set custom schedules for the light to turn on/off automatically.

Set the perfect ambient lighting
right from your smartphone!



atomi smart

Image: A living room illuminated by the Atomi Smart Ceiling Light, demonstrating its ability to create various ambient lighting settings controlled via a smartphone.

Fully Dimmable

Lower or increase the brightness of your light anytime with the highly-rated Atomi Smart app right from your phone.



Image: The Atomi Smart Ceiling Light providing a warm, dim glow, illustrating its fully dimmable feature for creating a relaxing atmosphere.

Built-in scenes and effects

Multiple scene modes give you a wonderful user experience. Especially great for holidays, events, celebrations, and more.

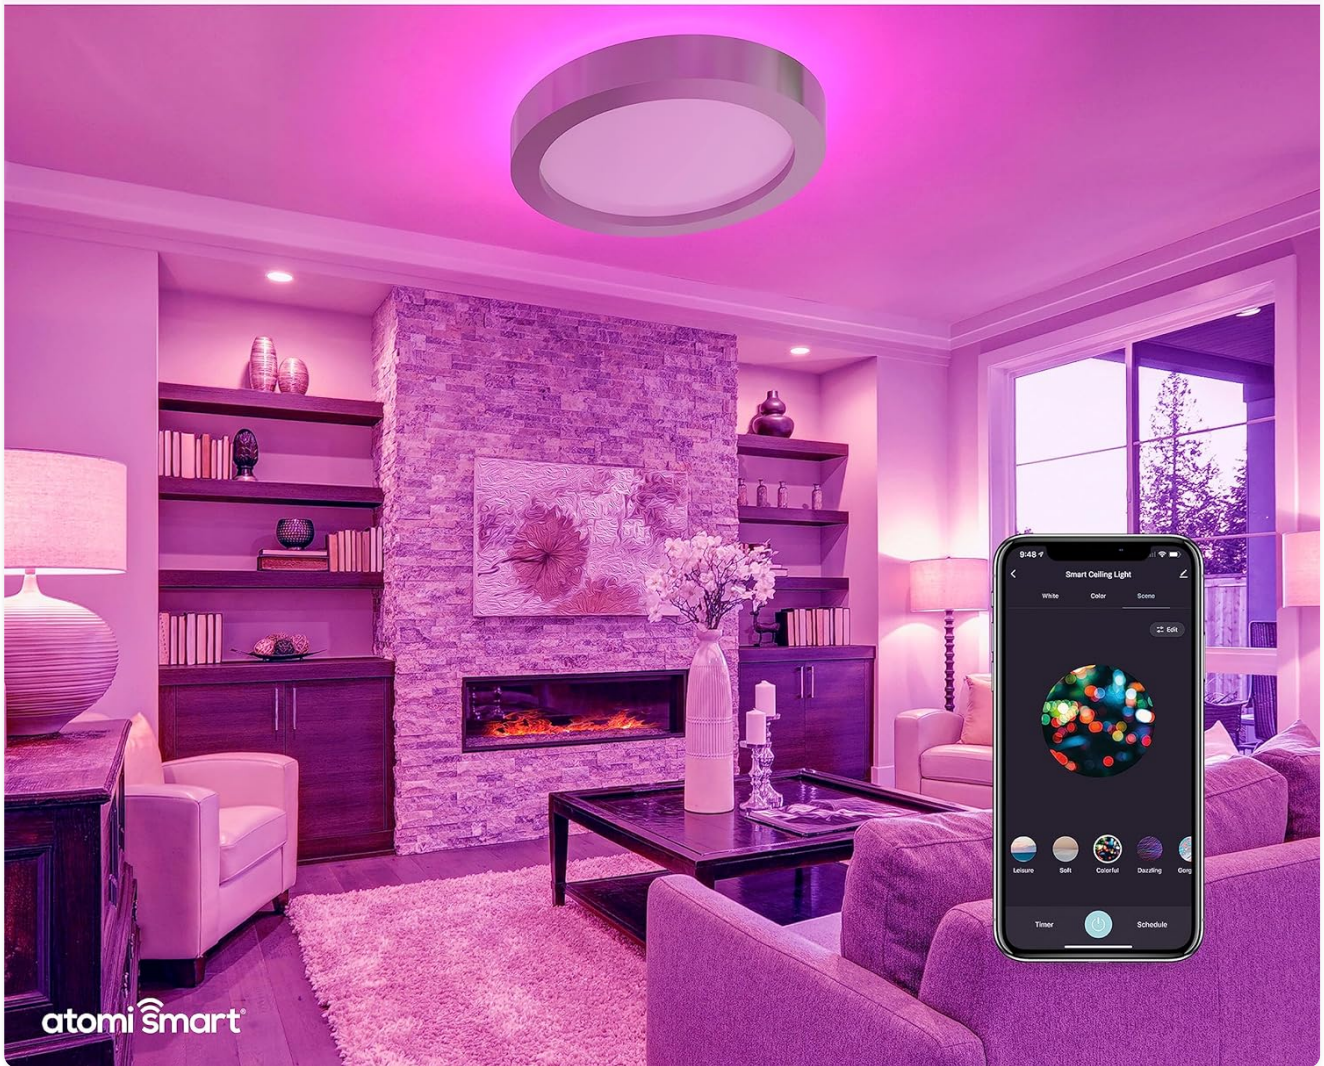


Image: The Atomi Smart Ceiling Light displaying a vibrant purple hue, highlighting its built-in scene modes and effects controllable through the app.

What can you do on the Atomi Smart app?



- Turn on/off the lights
- Check the light status
- Change light intensity/brightness
- Change color saturation
- Change white temperature (cool/warm)
- Create/edit scenes and effects
- Group multiple Ceiling Lights and control them together
- Create timers and schedules to turn on/off the device
- Learn more about the device features

Image: A detailed view of the Atomi Smart app interface, illustrating the various controls available for the ceiling light, including color selection and brightness adjustment.

Voice Control

The Atomi Smart Ceiling Light is compatible with Amazon Alexa and Google Assistant. Once linked, you can use simple voice commands to control your light. Refer to the respective voice assistant's app for detailed linking instructions.

- "Alexa, turn on the living room light."
- "Hey Google, set the kitchen light to blue."
- "Alexa, dim the bedroom light to 50%."

Works with Alexa or Google Assistant

Connect the Smart Ceiling Light to your Alexa or Google Assistant-enabled device for voice control capabilities.



Image: An Amazon Echo device in a living room setting, demonstrating the Atomi Smart Ceiling Light's compatibility with voice assistants like Alexa and Google Assistant.

MAINTENANCE

The Atomi Smart WiFi LED Ceiling Light is designed for long-lasting performance with minimal maintenance.

- **Cleaning:** To clean the light fixture, ensure power is off at the circuit breaker. Use a soft, dry cloth to wipe down the surface. Do not use abrasive cleaners or solvents.
- **No Bulb Replacement:** The light uses integrated LED chips designed to last up to 50,000 hours, eliminating the need for bulb replacement. This is equivalent to approximately 2 x 60W incandescent bulbs.
- **Regular Checks:** Periodically check the mounting and wiring connections to ensure they remain secure.

LED



RGB-CCT LED Lights

Uses 24 watts to produce 2200 lumens of flicker-free, dimmable lighting



Tunable White + Color-Changing Hue

Select warm to cool white light or play with 16 million colors to create the effect you want

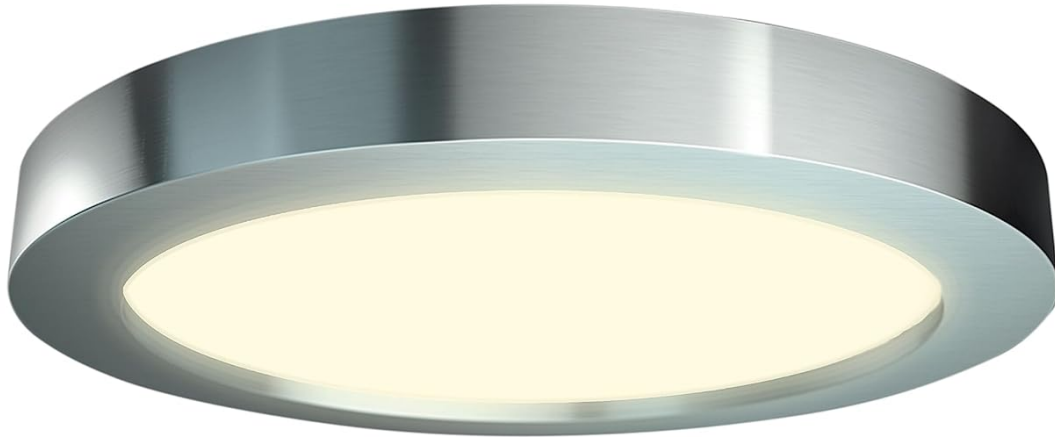

Commercial Grade

Brushed nickel finish around a frosted lens for even light distribution with exceptional color accuracy



No Bulb to Replace

LED chips last 50,000 hours, equivalent to 2x 60 watts



Image: A detailed view of the Atomi Smart Ceiling Light, emphasizing its LED components and durable brushed nickel finish, which contribute to its low maintenance.

TROUBLESHOOTING

If you encounter issues with your Atomi Smart WiFi LED Ceiling Light, refer to the following common solutions:

Problem	Possible Cause	Solution
Light does not turn on.	No power; loose wiring; faulty fixture.	Check circuit breaker. Ensure all wiring connections are secure. Contact a qualified electrician if unsure.
Light disconnects from WiFi frequently.	Weak WiFi signal; router issues; interference.	Ensure the light is within range of your 2.4GHz WiFi router. Restart your router. Minimize interference from other devices.


Problem	Possible Cause	Solution
Cannot connect to Atomi Smart app.	Incorrect WiFi password; light not in pairing mode; 5GHz network.	Double-check WiFi password. Turn the light off and on 3 times to enter pairing mode (rapid blinking). Ensure you are connecting to a 2.4GHz network.
Voice control not working.	Voice assistant not linked; incorrect device name.	Verify the Atomi Smart skill/service is linked in your Alexa/Google Home app. Ensure you are using the correct device name as set in the Atomi Smart app.

For further assistance, please contact Atomi Smart customer support.

SPECIFICATIONS

Detailed technical specifications for the Atomi Smart WiFi LED Ceiling Light.

Feature	Specification
Model Number	AT1515
Brand	Atomi Smart
Light Source Type	LED
Brightness	2200 Lumens (2400 Lumen in some specifications)
Wattage	24W (120 watts in some specifications)
Voltage	120 Volts
Color Temperature	2000K-6500K (Tunable White)
Color Options	16 Million Colors (RGB-CCT)
Control Method	WiFi (2.4GHz), Voice (Alexa, Google Assistant), App
Material	Glass (Shade: Nickel)
Finish Type	Brushed Nickel
Dimensions	16 inches (Diameter) x 2.4 inches (Height)
Item Weight	6.64 pounds
Lifespan	50,000 hours (LED chips)
Indoor/Outdoor Usage	Indoor

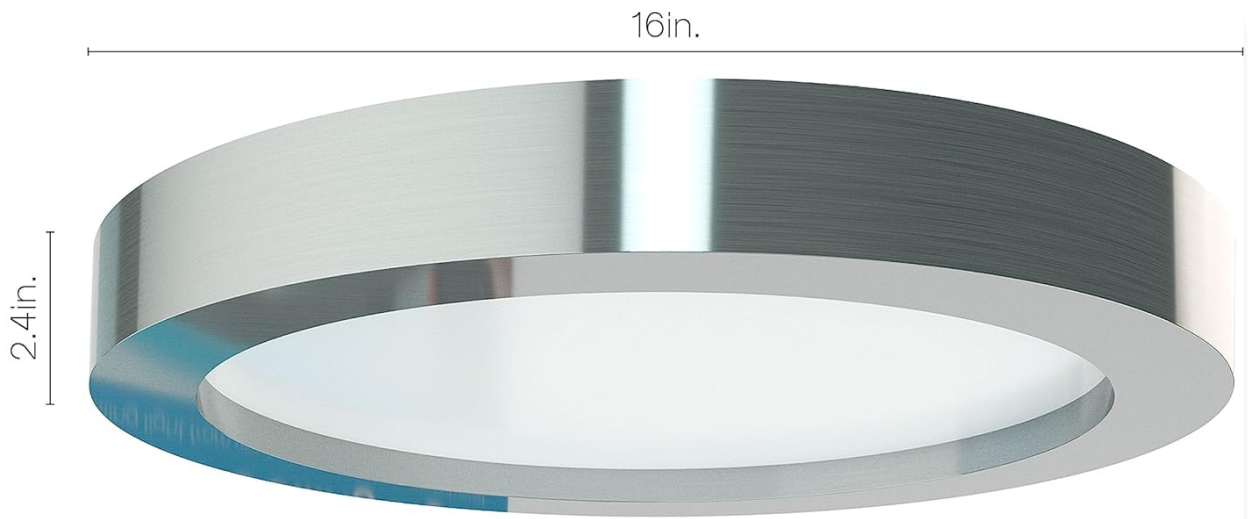

atomi smart®

Image: A diagram illustrating the physical dimensions of the Atomi Smart Ceiling Light, showing its 16-inch diameter and 2.4-inch height.

WARRANTY AND SUPPORT

Atomi Smart stands behind its products with dedicated customer service and a comprehensive warranty.

Warranty Information

Atomi Smart provides a **5-year limited warranty** on all its smart products, including this ceiling light. This warranty covers defects in materials and workmanship under normal use. Please retain your proof of purchase for warranty claims.

Customer Support

For any questions, technical assistance, or warranty inquiries, please contact Atomi Smart customer service. Their professional service team is committed to providing 100% satisfaction with a 24-hour quick response.

You can typically find contact information on the Atomi Smart official website or within the Atomi Smart app.

