

[manuals.plus](#) /› [ZEBRONICS](#) /› [Zebronics ZEB-JUKE BAR 9400 PRO DOLBY 5.1 Channel Bluetooth Home Theater Soundbar User Manual](#)

ZEBRONICS ZEB-Juke Bar 9400 Pro Dolby 5.1

Zebronics ZEB-JUKE BAR 9400 PRO DOLBY 5.1 Channel Bluetooth Home Theater Soundbar User Manual

Model: ZEB-Juke Bar 9400 Pro Dolby 5.1 | Brand: ZEBRONICS

INTRODUCTION

This manual provides detailed instructions for the setup, operation, and maintenance of your Zebronics ZEB-JUKE BAR 9400 PRO DOLBY 5.1 Channel Bluetooth Home Theater Soundbar. Please read this manual thoroughly before using the product to ensure proper functionality and safety.

WHAT'S IN THE Box

Verify that all components listed below are included in your package:

- Sound Bar (1 Unit)
- Subwoofer (1 Unit)
- Satellite Speakers (2 Units)
- Remote Control (1 Unit)
- Input Cable (1 Unit)
- User Manual (1 Unit)
- Wall Mount Bracket with Fasteners (1 Pair)



Image: All components of the Zebronics ZEB-JUKE BAR 9400 PRO DOLBY 5.1 Soundbar system, including the soundbar, subwoofer, two satellite speakers, and remote control.

PRODUCT FEATURES

- 5.1 Channel Home Theater Soundbar with Subwoofer and Rear Satellite Speakers.
- Total Output Power: 525 Watts (Subwoofer: 150W, Soundbar: 225W, Satellites: 75W x 2).
- Supports Dolby Digital Plus for immersive surround sound.
- Multiple Connectivity Options: Bluetooth v5.0, USB, AUX (2ch RCA), Optical IN, HDMI (ARC).
- Integrated LED display for status indication.
- Convenient volume and media controls.
- Includes a remote control for easy operation.
- Designed for wall mounting (wall mount bracket included).
- Optimized for cinematic audio and enhanced gaming experiences.

SPECIFICATIONS

Feature	Detail
Model Name	ZEB-Juke Bar 9400 Pro Dolby 5.1
Speaker Type	Subwoofer; Soundbar; Surround Sound
Surround Sound Channel Configuration	5.1 (Single bar with two drivers, one subwoofer, and two satellites)
Total Audio Wattage	525 Watts
Subwoofer Output Power	150 Watts
Soundbar Output Power	225 Watts
Satellite Output Power	75 Watts x 2
Impedance	Subwoofer: 4Ω, Soundbar: 8Ω, Satellites: 8Ω
Frequency Response	45Hz-20kHz
Connectivity Technology	Wireless (Bluetooth), Wired (USB, AUX, Optical, HDMI ARC)
Bluetooth Version	5.0
Max. Supported Memory Size (USB)	32GB
Control Method	Remote Control
Colour	Black
Product Dimensions	Soundbar: 900mm(W) x 85mm(D) x 82mm(H); Subwoofer: 190mm(W) x 335mm(D) x 390mm(H); Satellite: 88mm(W) x 71mm(D) x 93mm(H)
Item Weight	7.7 kg
Power Source	AC
Mounting Type	Wall Mount



Dimension

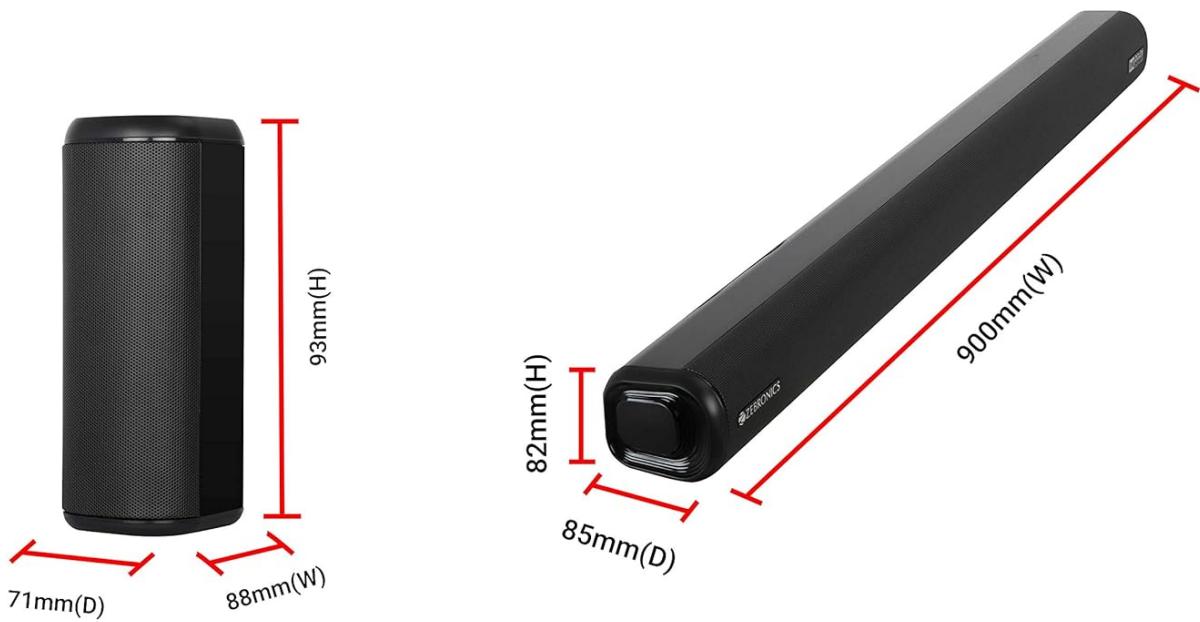


Image: Detailed dimensions for the soundbar, subwoofer, and satellite speakers.

SETUP GUIDE

1. Placement

- Soundbar:** Place the soundbar centrally below your television. Ensure there are no obstructions in front of the soundbar for optimal audio projection.
- Subwoofer:** Position the subwoofer on the floor, preferably in a corner or near a wall, to enhance bass response.
- Satellite Speakers:** Place the two satellite speakers behind your listening position, one on the left and one on the right, to create an immersive surround sound experience.



Cinematic Audio At Home

Image: Recommended speaker placement for a cinematic audio experience, showing the soundbar in front, subwoofer to the side, and satellite speakers at the rear.

2. Wall Mounting (Optional)

The soundbar can be wall-mounted using the provided brackets and fasteners. Ensure the wall can support the weight of the soundbar and use appropriate tools for installation.

1. Mark the desired mounting points on the wall using the wall mount bracket as a template.
2. Drill holes at the marked positions.
3. Insert wall plugs (if necessary) and secure the wall mount brackets with screws.
4. Carefully attach the soundbar to the mounted brackets.



Image: The soundbar positioned below a television, with an icon indicating its wall-mountable design.

3. Connections

Connect the soundbar and subwoofer to a power outlet. Connect your audio source (TV, media player, etc.) to the soundbar using one of the available input options.

Multi-Connectivity




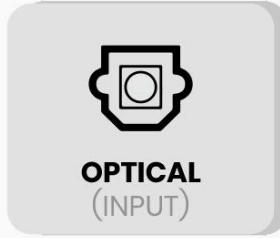


Image: The rear panel of the subwoofer, highlighting the HDMI (ARC), USB, AUX, Optical (Input), and Bluetooth v5.0 connectivity options.

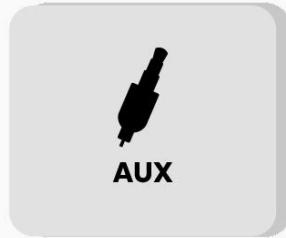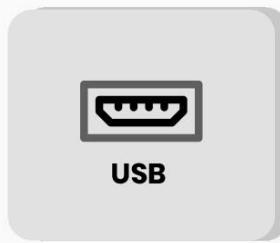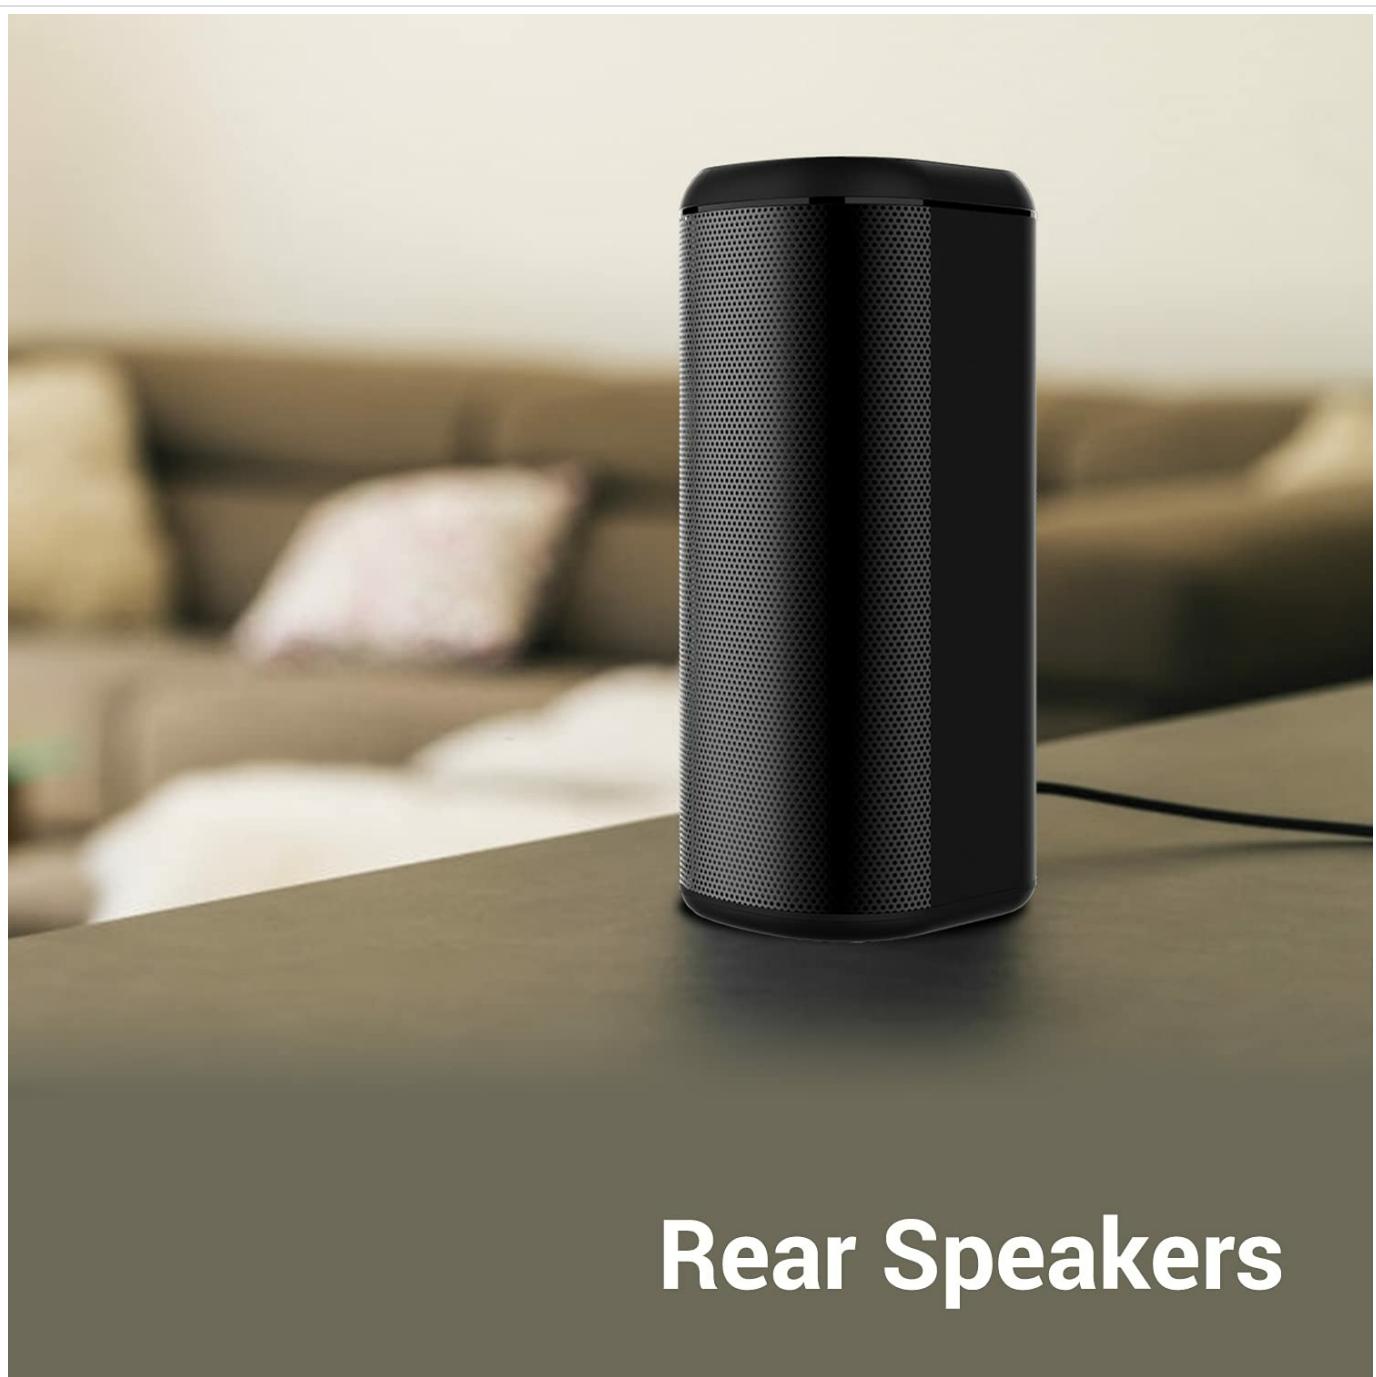

Rear Speakers

Image: A close-up view of one of the compact rear satellite speakers.

OPERATING INSTRUCTIONS

Power On/Off

- Press the **Power** button on the remote control or the soundbar to turn the unit on or off.

Input Source Selection

- Press the **Input** or **Source** button on the remote control to cycle through available input modes: HDMI (ARC), Optical, AUX, USB, and Bluetooth. The selected mode will be displayed on the LED screen.

Volume Control

- Use the **Volume +** and **Volume -** buttons on the remote control or the soundbar to adjust the master volume.

Bluetooth Pairing

1. Switch the soundbar to Bluetooth mode. The LED display will show "BT" and flash, indicating it's in pairing mode.
2. Enable Bluetooth on your mobile device or computer and search for "ZEB-JUKE BAR 9400 PRO".
3. Select the device to pair. Once connected, the "BT" indicator will stop flashing.

USB Playback

- Insert a USB drive (up to 32GB) into the USB port. The soundbar will automatically switch to USB mode and begin playback of supported audio files.
- Use the **Play/Pause**, **Next**, and **Previous** buttons on the remote control to manage playback.

MAINTENANCE

- **Cleaning:** Use a soft, dry cloth to clean the surfaces of the soundbar, subwoofer, and satellite speakers. Do not use liquid cleaners or abrasive materials.
- **Ventilation:** Ensure that the ventilation openings on the subwoofer are not blocked to prevent overheating.
- **Storage:** If storing the unit for an extended period, disconnect it from the power supply and store it in a cool, dry place.

TROUBLESHOOTING

Problem	Possible Cause	Solution
No power	Power cable not connected; Power outlet not active	Ensure power cable is securely connected. Check power outlet with another device.
No sound	Incorrect input source; Volume too low; Mute function active; Cables not connected properly	Select the correct input source. Increase volume. Deactivate mute. Check all audio cables are securely connected.
Bluetooth pairing fails	Soundbar not in pairing mode; Device too far; Interference	Ensure soundbar is in BT pairing mode (flashing "BT"). Move device closer. Avoid strong electromagnetic interference.
Remote control not working	Batteries depleted; Obstruction between remote and soundbar	Replace batteries. Ensure clear line of sight to the soundbar's IR receiver.

WARRANTY AND SUPPORT

This product comes with a standard manufacturer's warranty. For detailed warranty terms and conditions, please refer to the warranty card included in your package or visit the official Zebronics website. For technical support, service, or any inquiries, please contact Zebronics customer service.

Manufacturer: AJS DIGITAL TECHNOLOGY LIMITED, Zebronics

Importer: 118, Poonamallee High Rd, Veppery, Purasaiwakkam, Chennai, Tamil Nadu 600084

Date First Available: 15 June 2020

You can find more information and support on the [Official Zebronics Store on Amazon.in](#).

This manual is for informational purposes only. Specifications are subject to change without notice.