

LVWIT A19-008T018UX-29

LVWIT Smart A19 E26 LED Light Bulb User Manual

Model: A19-008T018UX-29

1. INTRODUCTION

This manual provides instructions for the installation, operation, and maintenance of your LVWIT Smart A19 E26 LED Light Bulbs. These bulbs are designed for smart home integration, offering customizable lighting options and energy efficiency. Please read this manual thoroughly before use to ensure proper functionality and safety.



Image: Four LVWIT Smart A19 E26 LED Light Bulbs, showcasing their color-changing capabilities.

2. PRODUCT FEATURES

The LVWIT Smart A19 E26 LED Light Bulbs offer a range of features for enhanced lighting control and energy savings:

- **Energy Saving:** Replaces 60-watt incandescent bulbs with 8.5W LED technology, reducing energy consumption by up to 85%.
- **APP Remote Control:** Manage your bulbs from anywhere using the Smart Life App or Tuya App on your smartphone. Supports group control for multiple bulbs. Requires a 2.4GHz Wi-Fi network.
- **Voice Control:** Compatible with Google Assistant and Amazon Alexa for hands-free operation. Use voice commands to turn lights on/off, adjust brightness, or change colors.
- **Millions of Colors:** Access 16 million colors and various shades of white to customize your room's ambiance.

- **Long Lifespan:** Designed for an average lifespan of 15,000 hours.



Image: An infographic detailing the smart features of the LVWIT bulb, such as Wi-Fi/Bluetooth connectivity, 16 million colors, group control, scheduling, energy saving, and voice control.



Image: A graphic depicting an LED bulb with green leaves, representing its energy-saving benefits.

3. SETUP INSTRUCTIONS

Follow these steps to install and connect your LVWIT Smart Light Bulbs:

1. **Install the Bulb:** Screw the smart bulb into a standard E26 light socket. Ensure the power is off before

installation.

2. **Power On:** Turn on the light switch. The bulb should begin to flash rapidly, indicating it is in pairing mode. If it does not flash, turn the bulb off and on three times (on-off-on-off-on) to reset it to pairing mode.
3. **Download App:** Download the 'Smart Life' app or 'Tuya Smart' app from the Apple App Store or Google Play Store.
4. **Register/Login:** Open the app and register for a new account or log in with an existing one.
5. **Add Device:** In the app, tap the '+' icon (usually in the top right corner) to add a new device. Select 'Lighting' > 'Light Source (Wi-Fi)'.
6. **Connect to Wi-Fi:** Confirm the bulb is flashing rapidly. Enter your 2.4GHz Wi-Fi network name and password.
Note: These bulbs do not support 5GHz Wi-Fi networks.
7. **Pairing:** The app will begin searching for the device. Once found, the bulb will stop flashing and appear in your device list. You can rename the bulb for easier identification.

4. OPERATING INSTRUCTIONS

Once connected, you can control your LVWIT Smart Light Bulbs using the app or voice commands.

4.1 App Control

Open the Smart Life or Tuya Smart app and select your bulb from the device list.

- **Color Changing:** Navigate to the 'Color' tab to select from 16 million colors.
- **Dimming:** Adjust the brightness slider to dim or brighten the light.
- **Scene Modes:** Use preset scenes (e.g., 'Reading', 'Party', 'Relax') or create custom scenes under the 'Scene' tab.
- **Scheduling:** Set timers for the bulbs to turn on or off at specific times. This is useful for automating your lighting.
- **Group Control:** Create groups of bulbs to control multiple lights simultaneously. This is ideal for rooms with several bulbs.

Group them into different groups to control color modes, let your devices work around your life.



💡 X2 Bedroom



💡 X1 Rest area




💡 X2 Dining area



💡 X2 Livingroom

Remote control device with Internet connection in any place.

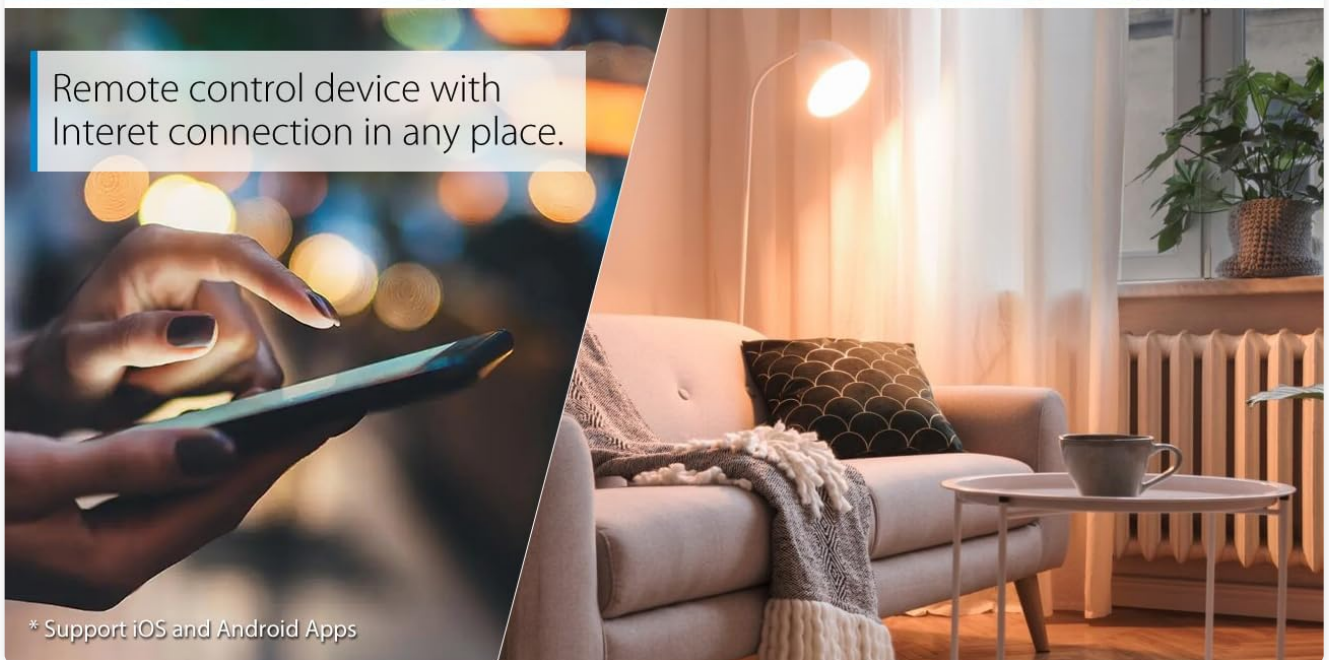

* Support iOS and Android Apps

Image: Examples of grouping smart bulbs for control in various home areas and remote control via a smartphone app.

Schedule its automatical working time as your need.

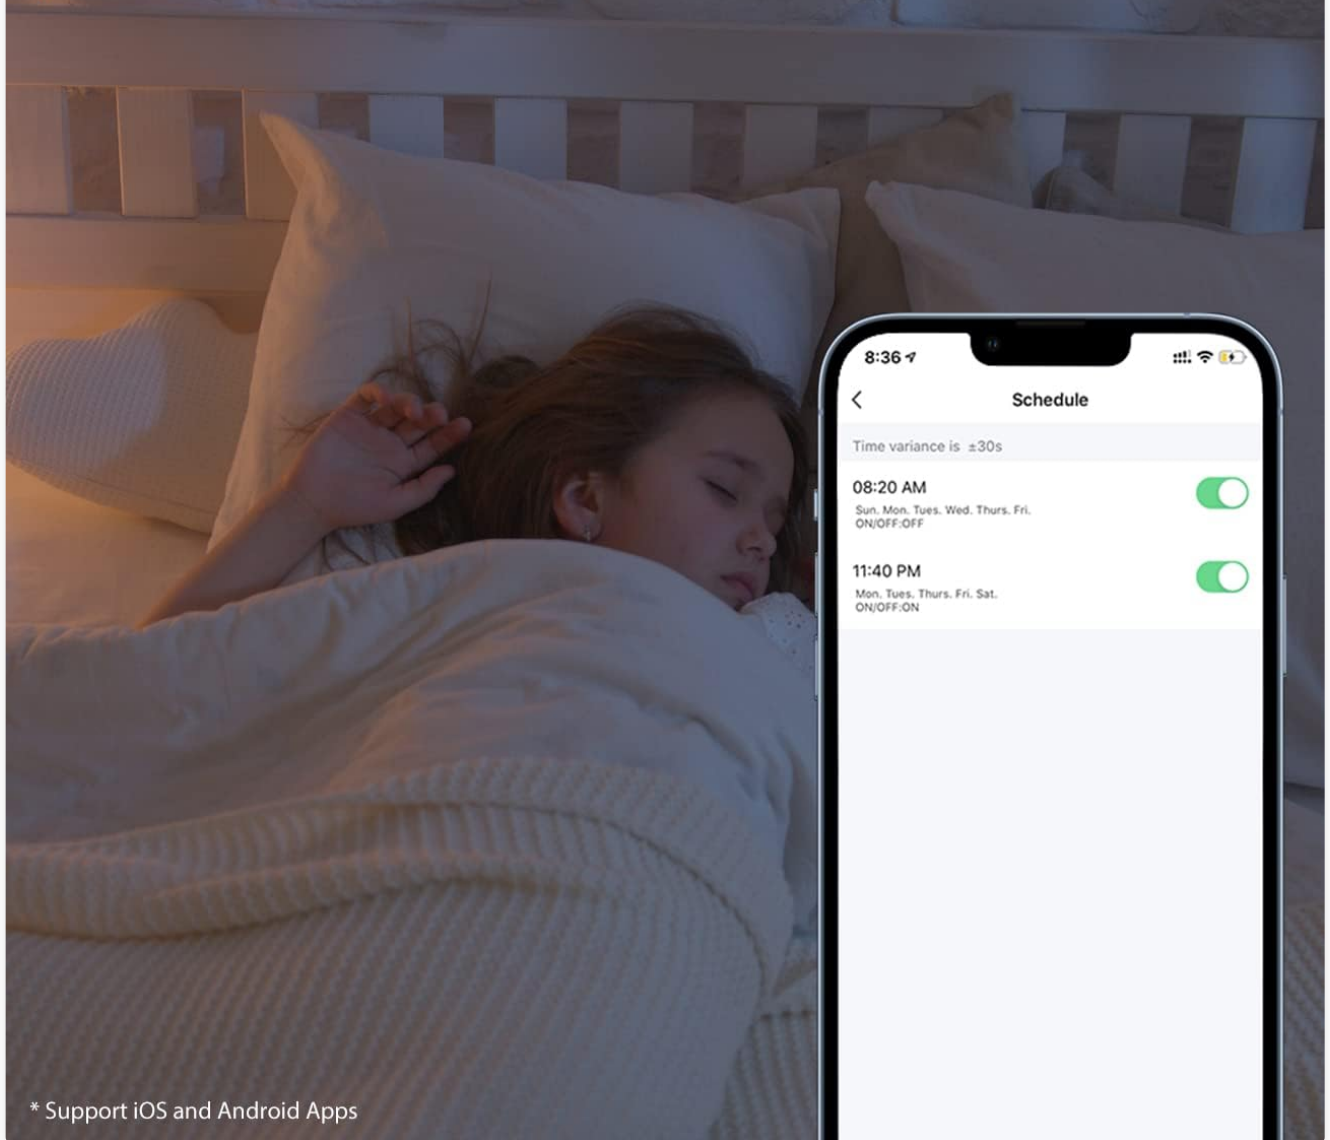


Image: A smartphone app showing light scheduling options, demonstrating how to automate light operation.

Multi-access scene modes
to meet all your needs.

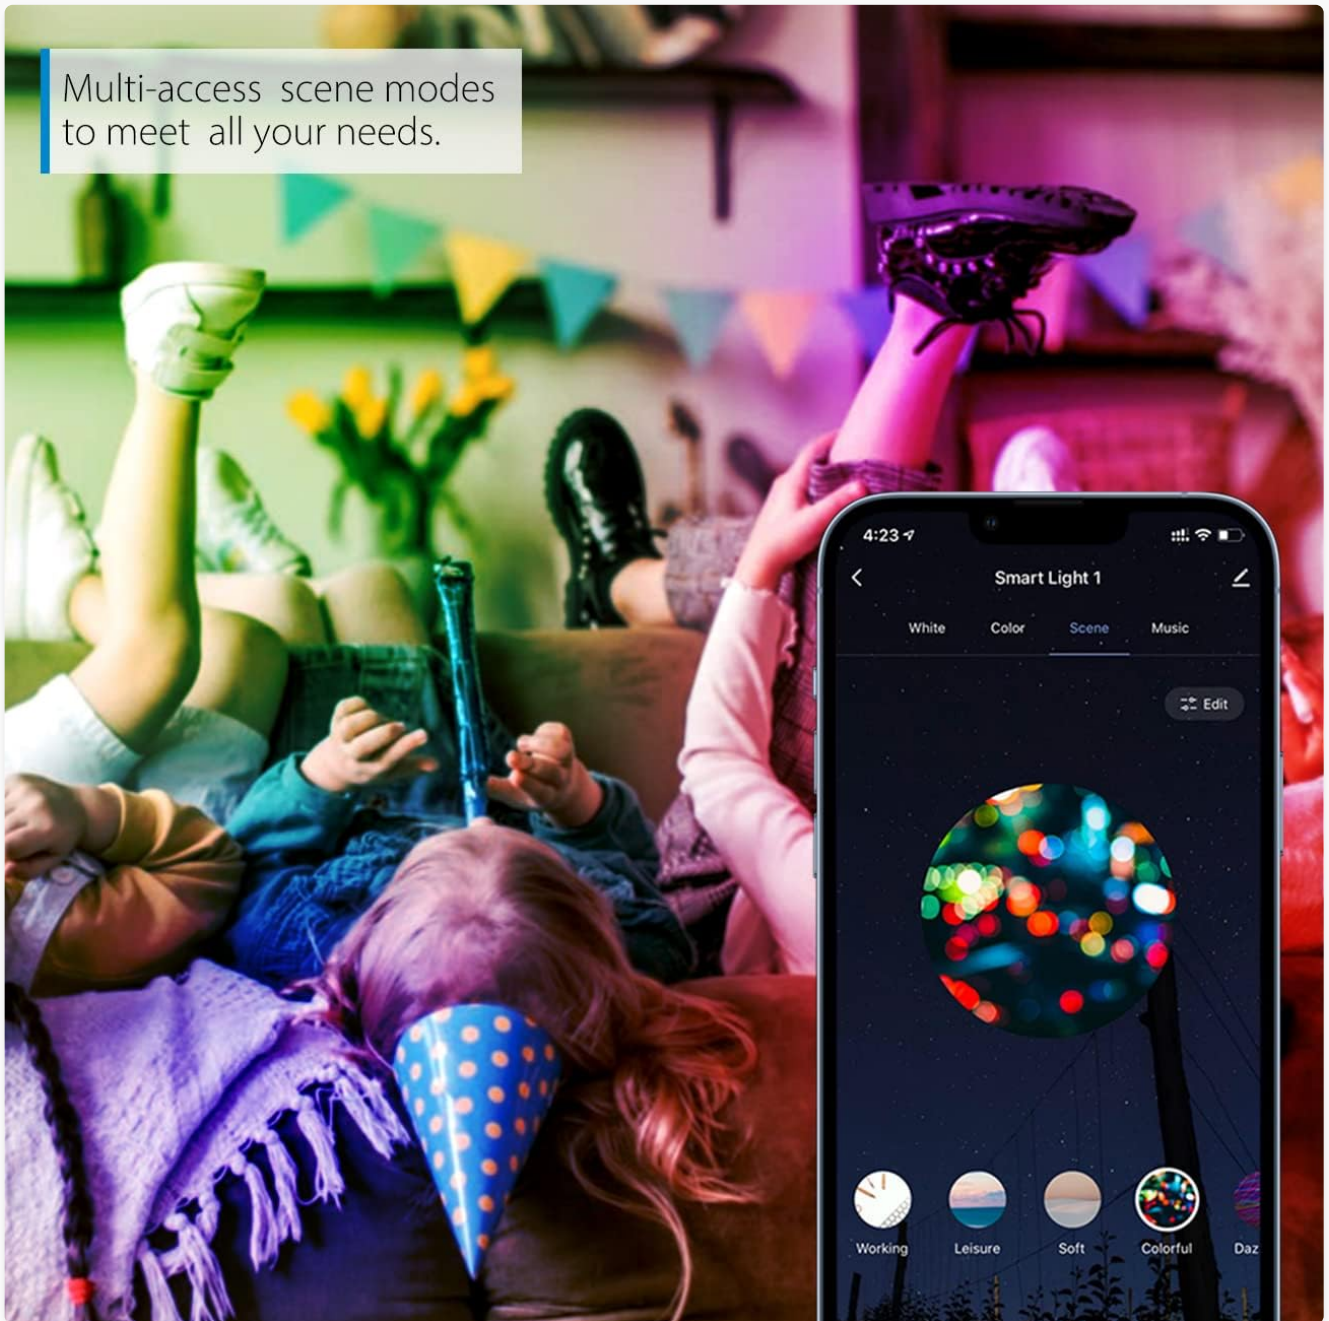


Image: The app interface showing different scene modes for smart lighting, allowing users to quickly change the room's atmosphere.

4.2 Voice Control

Integrate your LVWIT Smart Light Bulbs with Amazon Alexa or Google Assistant for voice commands.

1. **Link Account:** In the Alexa or Google Home app, navigate to 'Skills & Games' (Alexa) or 'Works with Google' (Google Home) and search for 'Smart Life' or 'Tuya Smart'. Link your account.
2. **Discover Devices:** Once linked, ask your voice assistant to 'Discover devices'.
3. **Voice Commands:** Use commands such as:
 - "Alexa/Hey Google, turn on [Bulb Name]."
 - "Alexa/Hey Google, dim [Bulb Name] to 50%."
 - "Alexa/Hey Google, change [Bulb Name] to blue."



Image: A user interacting with smart speakers (Alexa and Google Home) to control lighting via voice commands.

5. MAINTENANCE

To ensure the longevity and optimal performance of your LVWIT Smart Light Bulbs, follow these simple maintenance guidelines:

- **Cleaning:** Ensure the bulb is off and cool before cleaning. Wipe the bulb with a soft, dry cloth. Do not use liquid cleaners or abrasive materials.
- **Handling:** Handle bulbs by the base, not the glass, to avoid damage.
- **Environment:** Use bulbs in dry, indoor environments. Avoid exposure to water or high humidity.
- **Power Surges:** Consider using surge protectors for your lighting fixtures to protect against electrical fluctuations.

6. TROUBLESHOOTING

If you encounter issues with your LVWIT Smart Light Bulbs, refer to the following common solutions:

Problem	Possible Cause	Solution
Bulb not flashing for pairing	Not in pairing mode.	Turn the light switch off and on three times (on-off-on-off-on) to reset the bulb to rapid flashing mode.
Bulb fails to connect to Wi-Fi	Incorrect Wi-Fi band (5GHz), weak signal, or wrong password.	Ensure your Wi-Fi network is 2.4GHz. Move closer to the router. Double-check Wi-Fi password. Reset the bulb and try again.
Bulb disconnects frequently	Unstable Wi-Fi connection or interference.	Ensure the bulb is within good Wi-Fi range. Reduce interference from other devices. Consider a Wi-Fi extender if necessary. Re-pair the bulb if persistent.
Voice control not working	Account not linked or device not discovered.	Verify that your Smart Life/Tuya Smart account is correctly linked in the Alexa/Google Home app. Ask your voice assistant to 'Discover devices' again.
App cannot control bulb	Bulb offline or app issue.	Check if the bulb is powered on and connected to Wi-Fi. Close and reopen the app. If the issue persists, try resetting and re-pairing the bulb.

7. SPECIFICATIONS

Key technical specifications for the LVWIT Smart A19 E26 LED Light Bulb:

Feature	Detail
Brand	LVWIT
Model Number	A19-008T018UX-29
Bulb Shape Size	A19
Bulb Base	E26
Wattage	8.5 Watts
Incandescent Equivalent	60 Watts
Light Type	LED
Light Color	RGB (16 Million Colors)
Voltage	120 Volts
Control Method	App (Smart Life/Tuya Smart), Voice (Alexa/Google Assistant)
Connectivity	2.4GHz Wi-Fi (Does not support 5GHz)
Average Life	15,000 Hours

Feature	Detail
Color Rendering Index (CRI)	80
Product Dimensions	2.36 x 0.01 x 4.21 inches
Item Weight	8.1 ounces



LED A19
16 MILLION COLORS



- ⚡ Energy Used **8.5 W**
- ↔ Incandescent **60 W** Equivalent
- ⚡ Voltage **120 Voltage**
- ☀ Brightness **806 Lumens**
- 💡 Base Type **E26**
- 📐 Beam Angle **180°**
- 🌈 CRI **80+**
- 🕒 Life times **15000 Hours**
- 📱 System Supported **IOS / Android**
- 🛡 Warranty **3 years**

Image: Detailed specifications and dimensions of the LVWIT A19 LED bulb.

8. WARRANTY AND SUPPORT

LVWIT Smart Light Bulbs come with a **3-year warranty** from the date of purchase. This warranty covers manufacturing defects and ensures reliable performance under normal use conditions.

For technical assistance, troubleshooting not covered in this manual, or warranty claims, please contact LVWIT customer support. Refer to the product packaging or the official LVWIT website for the most current contact information. When contacting support, please have your product model number (A19-008T018UX-29) and proof of purchase available.

Related Documents - A19-008T018UX-29

	<p>LVWIT 4" 5CCT 1 LED Recessed Light Installation Manual</p> <p>Comprehensive installation guide for the LVWIT 4-inch 5CCT 1 LED Recessed Light, covering components, step-by-step installation, product specifications, safety warnings, and compatible dimmer models.</p>
	<p>6" 5CCT LED Recessed Light Installation Manual</p> <p>This manual provides installation instructions and specifications for the 6" 5CCT LED Recessed Light. It includes safety warnings, component lists, and a compatibility list for dimmers.</p>
	<p>Novostella Smart LED Bulb User Guide - Setup, Alexa, Google Assistant Control</p> <p>Detailed user guide for Novostella Smart LED Bulbs. Learn how to easily set up your smart bulb, connect it to the Smart Life app, and control it with Amazon Alexa and Google Assistant voice commands. Includes product specifications and troubleshooting tips.</p>
	<p>Consciot Smart Bulb Troubleshooting Guide: Setup and Connectivity Issues</p> <p>A comprehensive troubleshooting guide for Consciot smart bulbs, addressing common setup failures with Apple Home, Alexa, and general connectivity issues. Learn how to resolve pairing errors, device not found, offline status, and more.</p>
	<p>Smart Light Bulb User Manual and Amazon Echo Integration Guide</p> <p>Comprehensive user manual for Smart Light Bulbs, detailing setup and integration with Amazon Echo devices for voice control. Covers app installation, device pairing, and voice command usage.</p>
	<p>Blxecky Smart Bulb User Manual: Setup, Features, and Voice Control</p> <p>Comprehensive user manual for the Blxecky Smart Bulb, a Tuya-based WiFi+BLE device. Learn how to set it up using the Smart Life app, integrate with Amazon Alexa and Google Home, explore app features like color control and music sync, and find solutions to common issues.</p>