

[Manuals.plus](#) /

› [GoYeel](#) /

› GoYeel Vanity Lights - 2 Light Farmhouse Bathroom Lighting User Manual

GoYeel GY-w002-b02

GoYeel Vanity Lights - 2 Light Farmhouse Bathroom Lighting User Manual

Model: GY-w002-b02

INTRODUCTION

Welcome to the user manual for your GoYeel 2-Light Farmhouse Bathroom Vanity Light. This fixture is designed to provide functional and aesthetic lighting for your bathroom, vanity, or other indoor spaces. Please read this manual thoroughly before installation and use to ensure safe and proper operation. Retain this manual for future reference.



Image: The GoYeel 2-Light Farmhouse Bathroom Vanity Light in matte black, featuring two barn-style shades with exposed Edison bulbs, mounted above a circular mirror in a modern bathroom setting.

SAFETY INFORMATION

Always follow basic safety precautions when installing, operating, and maintaining electrical products to reduce the risk of fire, electric shock, or injury to persons.

- **WARNING:** To avoid electric shock, ensure power is turned off at the circuit breaker or fuse box before installation or any maintenance.
- Consult a qualified electrician if you are unsure about the installation process.
- This fixture is intended for indoor use only. Do not expose to water or moisture.
- Do not exceed the maximum wattage specified for the bulbs.
- Handle glass components with care to prevent breakage.
- Keep flammable materials away from the light fixture when in use.

PACKAGE CONTENTS

Please check to ensure all parts are included in your package:

- GoYeel 2-Light Vanity Fixture (1)
- Mounting Hardware Kit (1)
- User Manual (1)
- *Note: Bulbs are NOT included.*

SPECIFICATIONS

Feature	Detail
Brand	GoYeel
Model Name	CL
Item Model Number	GY-w002-b02
Color	Matte Black
Material	Metal
Style	Antique/Modern/Simple/Industrial
Product Dimensions	15"L x 6"W x 8"H
Number of Light Sources	2
Bulb Base	E26
Max Wattage per Bulb	60 Watts
Voltage	110 Volts
Light Source Type	LED/CFL/Incandescent (Bulbs not included)
Special Feature	Dimmable (with compatible bulbs and dimmer switch)
Installation Type	Semi Flush Mount
Indoor/Outdoor Usage	Indoor
Item Weight	3.41 pounds (1.55 Kilograms)



Image: Detailed diagram illustrating the dimensions of the vanity light fixture (15 inches length, 6 inches width, 8 inches height) and examples of compatible E26 base bulbs, including LED, CFL, and incandescent types, with a maximum wattage of 60W.

SETUP AND INSTALLATION

Tools Required (Not Included):

- Phillips Head Screwdriver
- Wire Strippers

- Electrical Tape
- Ladder (if necessary)
- Safety Glasses

Pre-Installation Steps:

1. **Turn off power:** Locate the circuit breaker or fuse box and turn off the power to the junction box where you will be installing the fixture.
2. **Unpack:** Carefully unpack the fixture and all parts. Keep the packaging materials until you are sure all parts are present and the fixture is installed.
3. **Inspect:** Inspect the fixture for any damage. Do not install if damaged.

Mounting the Fixture:

1. Attach the mounting bracket to the junction box using the provided screws. Ensure the bracket is securely fastened.
2. Feed the electrical wires from the junction box through the center hole of the mounting bracket.

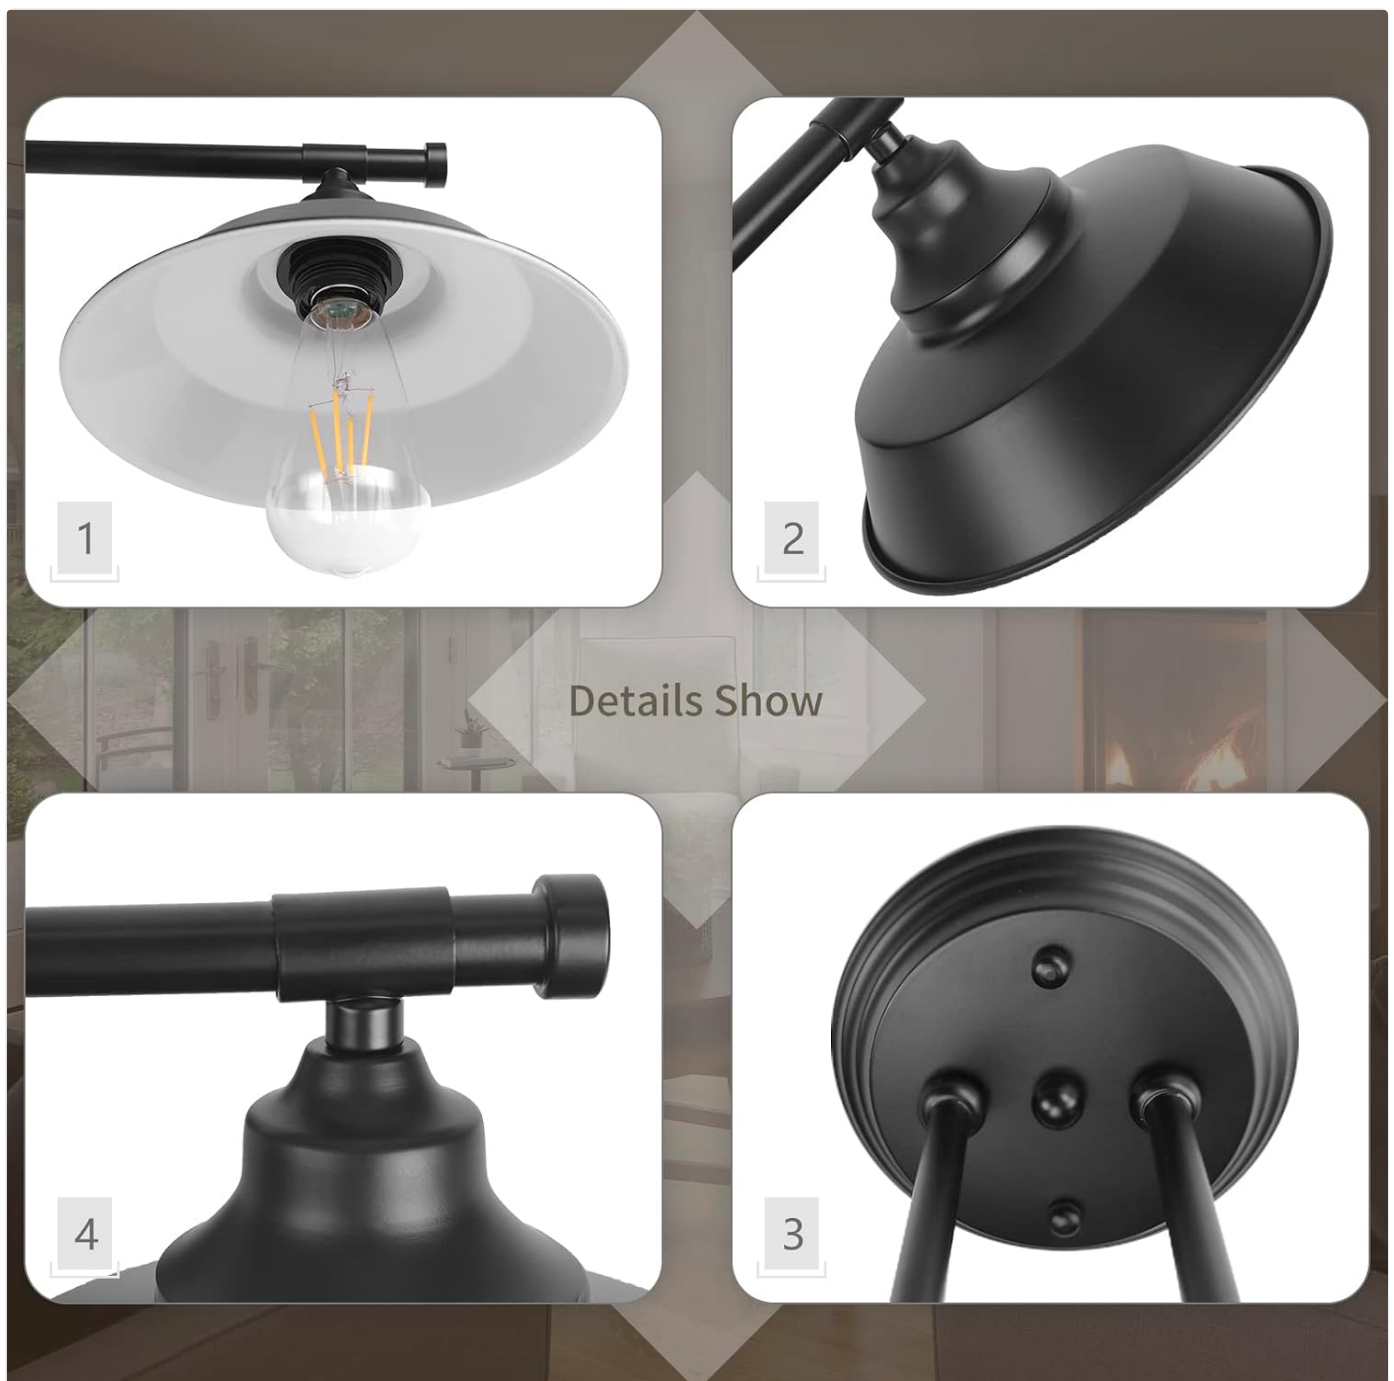


Image: Close-up details of the light fixture, showing the interior of the matte black shade with the E26 bulb socket, the connection point of the arm to the shade, and the circular mounting plate with screw holes for installation.

Wiring Instructions:

1. Connect the fixture's ground wire (usually bare copper or green) to the house's ground wire using a wire nut.
2. Connect the fixture's hot wire (usually black) to the house's hot wire (black) using a wire nut.
3. Connect the fixture's neutral wire (usually white) to the house's neutral wire (white) using a wire nut.
4. Carefully tuck all wires into the junction box.

Securing the Fixture:

1. Align the fixture's canopy with the mounting bracket and secure it with the decorative nuts or screws provided.
2. Ensure the fixture is flush against the wall and stable.

Installing Bulbs:

1. Screw E26 base bulbs (not included) into the sockets.
2. Do not exceed the maximum wattage of 60W per bulb.

OPERATING INSTRUCTIONS

Once the fixture is securely installed and bulbs are in place:

1. **Restore Power:** Turn the power back on at the circuit breaker or fuse box.
2. **Turn On/Off:** Use your wall switch to turn the light fixture on or off.
3. **Dimming Function:** If you are using dimmable E26 bulbs and a compatible dimmer switch (both sold separately), you can adjust the light intensity to your preference.



Image: A side-by-side comparison showing the GoYeel 2-Light Vanity Light above a mirror. The left side shows the light off, and the right side shows the light on, illustrating the fixture's illumination and its potential for dimming when used with appropriate bulbs and switches.

MAINTENANCE

Cleaning:

- Always turn off the power and allow the fixture to cool before cleaning.
- Wipe the fixture with a soft, dry cloth.
- Do not use abrasive cleaners, solvents, or polishes as they may damage the finish.

Bulb Replacement:

- Ensure the power is off and the bulbs have cooled completely.
- Carefully unscrew the old bulb from the socket.
- Screw in a new E26 base bulb, ensuring it does not exceed 60W.

TROUBLESHOOTING

Problem	Possible Cause	Solution
Light does not turn on.	- Power is off at the circuit breaker. - Loose wiring connection. - Bulb is faulty or not screwed in properly.	- Check the circuit breaker and turn power on. - Verify all wire connections are secure (with power off). - Replace bulb or ensure it is fully screwed into the socket.
Light flickers.	- Loose bulb. - Incompatible dimmer switch/bulb. - Loose wiring.	- Tighten the bulb. - Ensure dimmer and bulbs are compatible. - Check wiring connections (with power off).
Fixture gets too hot.	Bulb wattage exceeds maximum rating.	Replace with a bulb that does not exceed 60W.

WARRANTY INFORMATION

This GoYeel product comes with a limited warranty. Please refer to the original purchase documentation or contact customer support for specific details regarding the warranty period and coverage.

CUSTOMER SUPPORT

For any questions, assistance, or to report issues with your GoYeel Vanity Light, please contact our customer support team. You can find contact information on the GoYeel official website or through your purchase platform.

Brand: GoYeel

Manufacturer: GOODYI

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page’s manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question