

OHLUX SQPA6009-A

OHLUX Smart WiFi Light Bulbs A19 E26 User Manual

Model: SQPA6009-A | Brand: OHLUX

1. INTRODUCTION

This manual provides instructions for the installation, operation, and maintenance of your OHLUX Smart WiFi Light Bulbs. These LED bulbs offer advanced features including color-changing capabilities, dimming, and smart control via an app or voice assistants.



Figure 1: OHLUX Smart WiFi Light Bulbs (A19 E26)

2. SAFETY INFORMATION

- Turn power off before installing or removing the bulbs.
- These bulbs are designed for indoor use only and are not waterproof.
- Operate with 100-240 Volts AC. Avoid higher voltage to prevent damage.
- Read the user manual completely before installation and use.

3. PACKAGE CONTENTS

- OHLUX Smart WiFi Light Bulb(s) (Quantity as purchased)
- User Manual

4. SPECIFICATIONS

Brand	OHLUX
Model Name	SQPA6009-A
Light Type	LED

Wattage	10 Watts
Incandescent Equivalent	80 Watts
Bulb Shape Size	A19
Bulb Base	E26
Brightness	900 Lumen
Light Color	Multicolor (2700-6500K adjustable)
Voltage	120 Volts (AC)
Average Life	30,000 Hours
Control Method	App, Voice (Alexa, Google Home, Siri)
Indoor/Outdoor Usage	Indoor

5. SETUP AND INSTALLATION

5.1 Physical Installation

1. Ensure the power to the light fixture is turned off at the switch before installation.
2. Carefully screw the OHLUX Smart WiFi Light Bulb into a standard E26 socket.
3. Turn the power back on at the switch. The bulb should light up.

5.2 App Download and Pairing

To control your smart bulbs, download the "Smart Life" app from your device's app store (Google Play Store for Android or Apple App Store for iOS). Alternatively, scan the QR code provided in the product packaging to download the app.

- Open the Smart Life app and register/log in.
- Ensure your mobile device's Wi-Fi and Bluetooth are enabled. The bulbs require a 2.4GHz Wi-Fi network for connection.
- To enter pairing mode, turn the light switch OFF-ON-OFF-ON-OFF-ON (3-5 times) until the bulb begins to blink rapidly.
- In the app, tap the "+" icon in the top right corner to add a device. The app should automatically discover the blinking bulb.
- Follow the on-screen prompts to connect the bulb to your 2.4GHz Wi-Fi network. You will need to enter your Wi-Fi password.
- Once connected, you can rename the bulb for easier control.

Your browser does not support the video tag.

Video 1: Customer connect experience with Smart Life app. This video demonstrates the process of connecting the OHLUX Smart WiFi Light Bulb to the Smart Life application, including entering Wi-Fi details and device discovery.

Your browser does not support the video tag.

Video 2: How to turn on Wi-Fi, Bluetooth, and location on your cellphone for device pairing. This video guides users through enabling necessary phone settings to facilitate the pairing process with the smart bulb.

6. OPERATING INSTRUCTIONS

6.1 App Control

Once connected, you can control your OHLUX Smart WiFi Light Bulbs directly from the Smart Life app:

- **On/Off:** Tap the power icon next to the bulb's name.
- **Brightness:** Adjust the brightness slider from 1% to 100%.
- **Color Temperature:** In "White Mode," adjust the slider to change the white light from warm (2700K) to cool (6500K).
- **Color Selection:** In "Color Mode," choose from 16 million colors using the color wheel. Adjust saturation and brightness as desired.
- **Scene Modes:** Select from various preset scene modes (e.g., Night, Reading, Working, Leisure) or create custom scenes.
- **Music Sync:** The bulbs can change color and brightness in sync with music detected by your phone's microphone.



Figure 2: App interface showing 16 million color options and tunable white light.

6.2 Voice Control

The OHLUX Smart WiFi Light Bulbs are compatible with popular voice assistants. Link your Smart Life account to your Alexa, Google Home, or Siri account to enable voice commands.

- **Example Commands:**

- "Alexa, turn on the living room light."
- "Hey Google, set the bedroom light to blue."
- "Siri, dim the kitchen light to 50%."



Figure 3: Voice control integration with smart home devices.

6.3 Group Control

In the Smart Life app, you can create groups of bulbs to control multiple lights simultaneously. This is useful for rooms with several bulbs or for controlling lights across different areas of your home.

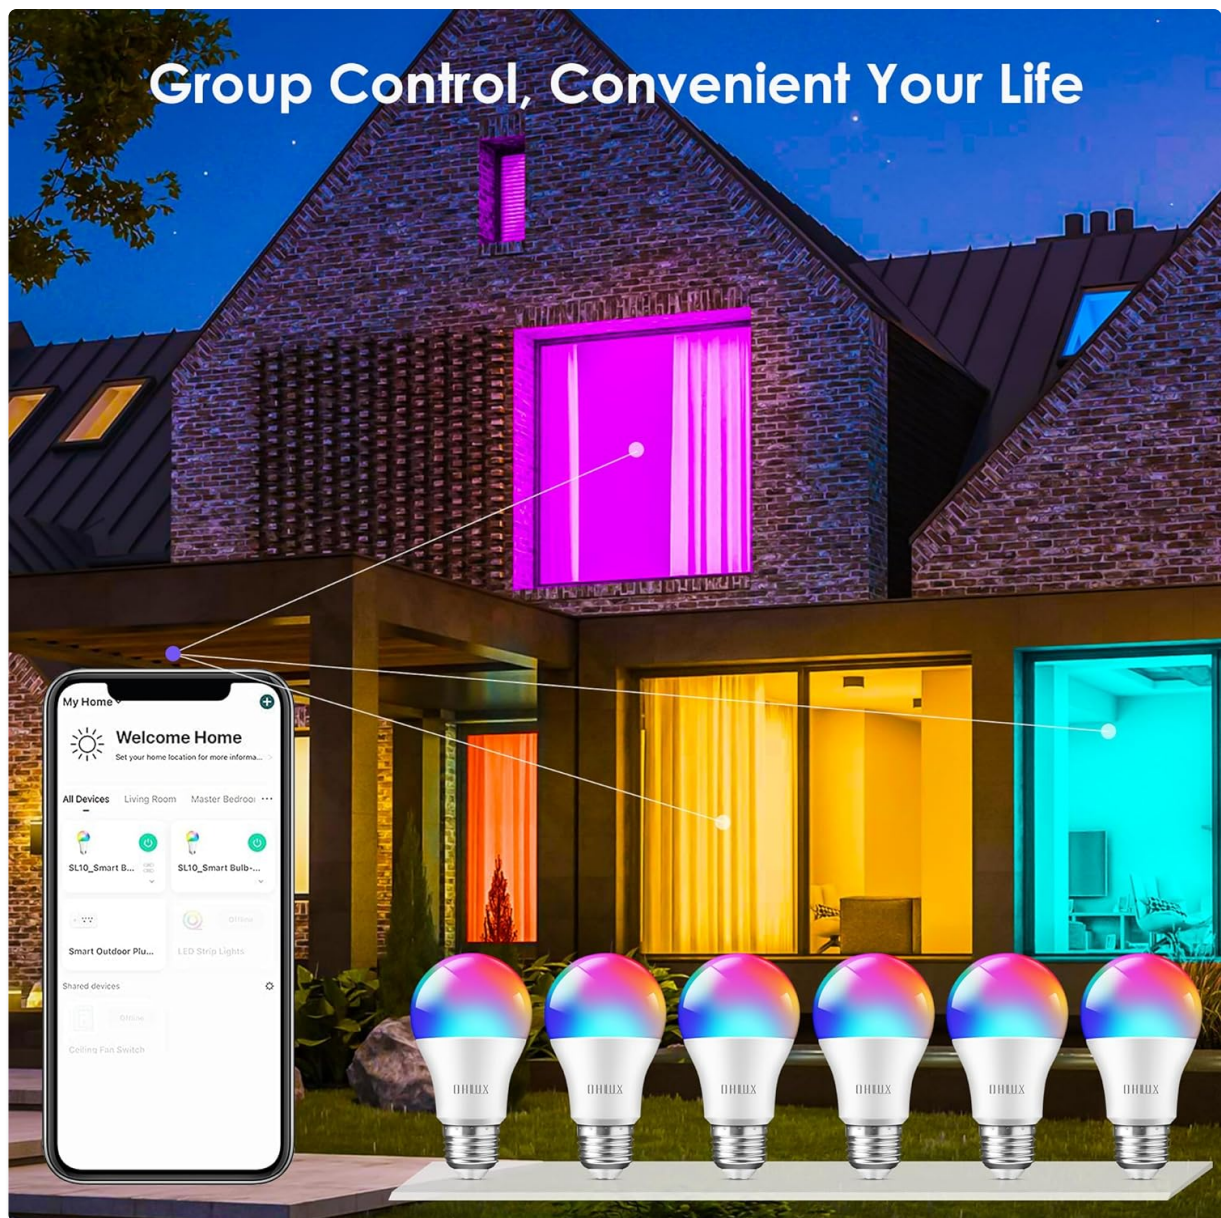


Figure 4: Managing multiple smart bulbs with group control via the app.

6.4 Timer and Schedule

Set schedules for your bulbs to turn on/off or change settings at specific times. Use the timer function for automatic shut-off after a set duration. Features like "Sunrise & Sunset" can automate lighting based on natural light cycles.

Timer & Customized Schedule Convenient Life

Temporizador y horario personalizado Vida cómoda



Create a warm
atmosphere

Crear un
ambiente cálido



It's time for bed
Es hora de dormir



Figure 5: Setting timers and schedules for automated lighting.

7. MAINTENANCE

- Ensure power is off before cleaning.
- Wipe the bulb with a soft, dry cloth. Do not use liquid cleaners.
- Avoid disassembling the bulb, as this will void the warranty.

8. TROUBLESHOOTING

8.1 Connectivity Issues

- **Bulb not blinking:** Ensure the power cycle (OFF-ON 3-5 times) is performed quickly and consistently.
- **App not finding the bulb:**
 - Confirm your Wi-Fi network is 2.4GHz. These bulbs do not support 5GHz networks.
 - Ensure your phone's Wi-Fi and Bluetooth are enabled.
 - Bring your phone closer to the bulb and Wi-Fi router during pairing.
 - Restart your Wi-Fi router and try again.

- Check your Wi-Fi signal strength in the bulb's location.
- Ensure your router is not overloaded with too many devices.
- Update the Smart Life app to the latest version.

- **Bulb not responding to commands:**

- Check if the bulb is connected to the app and online.
- Verify your internet connection is stable.
- For voice control, ensure the Smart Life skill/service is linked correctly in your voice assistant app.

- Perform a factory reset by repeating the OFF-ON cycle until the bulb blinks, then re-pair it.
- Ensure the bulb is not in an enclosed fixture that could cause overheating.

OHLUX products are designed for reliability and performance. For warranty information or technical support, please refer to the contact details provided on your product packaging or visit the official OHLUX website. Customer satisfaction is a priority, and support is typically available within 24 hours.

Figure 1 shows a collage of various mobile devices and their interfaces. It includes a smartphone displaying a news article, a tablet showing a web browser, a smart TV displaying a video, and several other mobile devices and interfaces, illustrating the range of devices used in mobile computing.

Comprehensive user manual for the OHLUX Smart LED Bulb. Learn how to download and install the Smart Life app, register, connect to Wi-Fi, control the bulb, and integrate with Amazon Alexa, Google Home, and Siri for smart home automation.


[illegible]

Find answers to frequently asked questions about OHLUX Smart LED Bulbs, covering compatibility, setup, features, and troubleshooting. Learn about Wi-Fi requirements, voice assistant integration, and more.



[Smart LED Bulb User Manual - Connect to Smart Life, Alexa, Google Assistant, Siri](#)

Comprehensive user manual for Smart LED Bulbs, detailing setup with the Smart Life app, integration with Amazon Alexa, Google Assistant, and Siri shortcuts. Learn how to control brightness, color, set schedules, and more.

	<p>Globe Electric Smart Bulb User Manual and Features</p> <p>Comprehensive guide to setting up and using the Globe Electric Smart Bulb with the Globe Suite app, including features like tunable white, scheduling, voice assistant integration, and troubleshooting.</p>