Saved from manuals.plus.
Open the live page for links to other documents and user manuals.

Joyroom JR-T03S Pro

User Manual for Joyroom JR-T03S Pro Wireless Earbuds

Model: JR-T03S Pro | Brand: Joyroom

Introduction

Thank you for choosing the Joyroom JR-T03S Pro Wireless Earbuds. These earbuds are designed to provide a superior audio experience with advanced features such as Active Noise Cancellation (ANC), high-fidelity sound, and seamless Bluetooth 5.0 connectivity. This manual will guide you through the setup, operation, and maintenance of your new earbuds to ensure optimal performance and longevity.

Product Overview

The Joyroom JR-T03S Pro package includes the following components:

- Joyroom JR-T03S Pro Wireless Earbuds (Left and Right)
- Charging Case
- Charging Cable (Lightning)
- Customizable Silicon Ear-tips (Small, Medium, Large)
- User Manual (this document)



Image: All components included in the Joyroom JR-T03S Pro package, neatly arranged.

Specifications

Below are the detailed technical specifications for the JR-T03S Pro Wireless Earbuds:

Brand	Joyroom
Model Number	JR-T03S Pro
Wireless Type	Bluetooth 5.0
Vocalism Principle	Dynamic
Sensitivity	103 ± 3dB
Impedance Range	Up to 32 Ω

Frequency Response	20 - 20000 Hz
Microphone	Yes
Noise Control	Active Noise Cancellation (ANC)
Charging Method	Charging Case (Lightning Connector)
Charging Case Battery	360 mAh
Earbud Battery	45 mAh (each)
Operating Time	Approx. 5 hours
Call Duration	Approx. 3 hours
Charging Time	Approx. 1 hour (earbuds), 1.5 hours (case)
Control Type	Touch Control
Features	Support Apple Siri, Beam-forming Noise Reduction, CVC 8.0, Graphene Drivers, aptX Codec



Image: A visual representation of the product's technical specifications and parameters.

Setup

Charging the Earbuds and Case

Before first use, ensure both the earbuds and the charging case are fully charged.

1. Place the earbuds into the charging case. Ensure they are correctly seated in their respective slots (L for left, R for right).

2. Connect the charging case to a power source using the provided Lightning cable.
3. The indicator light on the charging case will show the charging status. A full charge for the earbuds takes approximately 1 hour, and the charging case takes about 1.5 hours.
4. Once fully charged, disconnect the charging cable. The charging case has a 360 mAh battery, and each earbud has a 45 mAh battery, providing approximately 5 hours of operating time and 3 hours of call duration.



Image: Visual guide to the charging case and earbud battery capacities.

Bluetooth Pairing

Follow these steps to pair your Joyroom JR-T03S Pro earbuds with your device:

1. Ensure the earbuds are charged and inside the charging case.
2. Open the charging case lid. The earbuds will automatically enter pairing mode.
3. On your device (smartphone, tablet, etc.), go to the Bluetooth settings.
4. Search for "JR-T03S Pro" in the list of available devices and select it to connect.
5. Once connected, you will hear a confirmation tone, and the earbuds will be ready for use.
6. For subsequent uses, the earbuds will automatically connect to the last paired device when the case is opened, provided Bluetooth is enabled on your device.



Image: The Joyroom JR-T03S Pro earbuds in their charging case, illustrating their design for pairing.

Operating Instructions

Touch Controls

The JR-T03S Pro earbuds feature intuitive touch controls on each earbud. The specific functions are as follows:

- **Single Tap:** Play/Pause music, Answer/End call.
- **Double Tap (Left Earbud):** Previous track.

- **Double Tap (Right Earbud):** Next track.
- **Triple Tap:** Activate Voice Assistant (e.g., Apple Siri).
- **Long Press (2 seconds):** Toggle Active Noise Cancellation (ANC) / Transparency Mode.
- **Long Press (5 seconds):** Power On/Off (when not in case).

Active Noise Cancellation (ANC)

The JR-T03S Pro earbuds are equipped with advanced Active Noise Cancellation technology, allowing you to reduce ambient noise for an immersive listening experience. This feature is particularly effective in noisy environments such as public transport or busy offices.

- To activate or deactivate ANC, perform a long press (2 seconds) on either earbud. You will hear an audible prompt indicating the mode change.
- The earbuds also feature beam-forming noise reduction and CVC 8.0 technology for clear call quality, ensuring your voice is heard without background interference.



Image: An illustration demonstrating the active noise cancellation capability of the earbuds.



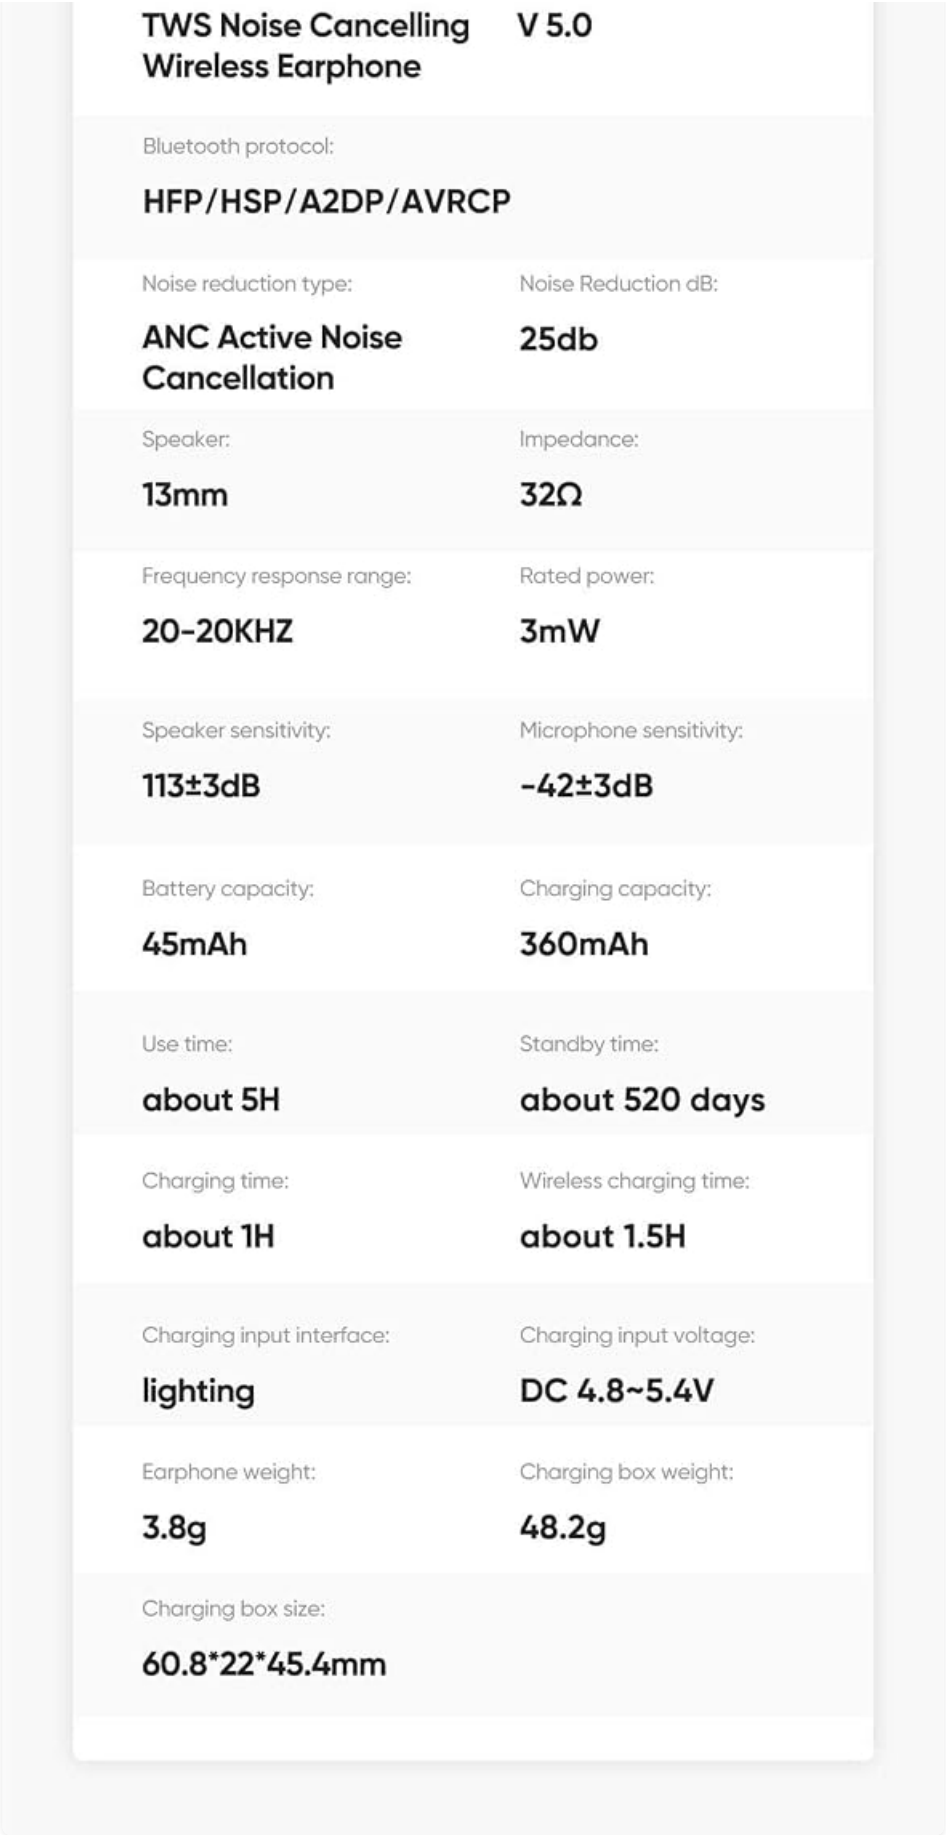


Image: Promotional image emphasizing the intelligent noise reduction core upgrade.

Sound Quality and Features

The JR-T03S Pro earbuds deliver a powerful and rich audio experience:

- Equipped with 13mm dynamic graphene drivers, they provide accurate and clear sound with enhanced bass.
- aptX codec ensures smooth audio transmission with minimal delay, contributing to a high-fidelity sound system.



Image: An internal view of the earbud highlighting the 13mm dynamic drivers responsible for HIFI sound quality.

Maintenance

Proper maintenance will extend the lifespan of your earbuds and ensure consistent performance.

- **Cleaning:** Regularly clean the earbuds, especially the ear tips and charging contacts, with a soft, dry, lint-free cloth. Do not use abrasive materials or harsh chemicals.
- **Storage:** When not in use, always store the earbuds in their charging case to protect them from dust, dirt, and physical damage.
- **Ear Tips:** The earbuds come with customizable silicon ear-tips in various sizes (Small, Medium, Large). Choose the size that provides the best seal and comfort for optimal sound and noise cancellation. Clean ear tips with water and mild soap if necessary, ensuring they are completely dry before reattaching.



Image: Various sizes of silicon ear-tips provided for a customizable and secure fit.

Troubleshooting

If you encounter any issues with your Joyroom JR-T03S Pro earbuds, please refer to the following common solutions:

Problem	Possible Solution
Earbuds not pairing/connecting.	◦ Ensure earbuds are charged and the case lid is open. ◦ Turn off and on Bluetooth on your device. ◦ Forget "JR-T03S Pro" from your device's Bluetooth list and try pairing again. ◦ Ensure earbuds are within Bluetooth range (approx. 10 meters).
No sound or low volume.	◦ Check the volume level on both your device and the earbuds. ◦ Ensure earbuds are properly seated in your ears. ◦ Clean any debris from the earbud speakers.
Charging issues.	◦ Ensure the charging cable is securely connected to both the case and the power source. ◦ Try a different charging cable or power adapter. ◦ Clean the charging contacts on both the earbuds and inside the case.

Active Noise Cancellation not working effectively.	◦ Ensure ANC is activated via touch control (long press). ◦ Check that the ear tips provide a good seal in your ear canal. Try different sized ear tips.

If the issue persists after trying these solutions, please contact customer support.

Warranty and Support

Joyroom products are manufactured to high quality standards. For information regarding warranty coverage and customer support, please refer to the warranty card included in your product packaging or visit the official Joyroom website. Please retain your proof of purchase for any warranty claims.
For further assistance, you may also contact the retailer where you purchased the product.

© 2024 Joyroom. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

https://manuals.plus/asin/B08CTB71J7

More documents and user manuals: **https://manuals.plus/**