

[manuals.plus](#) /

› [Zoook](#) /

› [Zoook Smart Connect 10A Wi-Fi Smart Plug User Manual](#)

## Zoook Smart Connect 1

# Zoook Smart Connect 10A Wi-Fi Smart Plug User Manual

Model: Smart Connect 1

## 1. INTRODUCTION

---

This manual provides instructions for the setup, operation, and maintenance of your Zoook Smart Connect 10A Wi-Fi Smart Plug. This device allows you to control your home appliances remotely, monitor energy consumption, and integrate with voice assistants like Amazon Alexa and Google Assistant.



Image 1.1: The Zoook Smart Connect 10A Wi-Fi Smart Plug and its retail packaging. The plug is white with a power button and the Zoook logo, designed for Type D sockets.

## 2. PRODUCT OVERVIEW

### 2.1 Package Contents

- 1 x Zoook Smart Connect 10A Smart Plug
- 1 x User Manual
- 1 x Warranty Card

### 2.2 Key Features

- 10 Amp Wi-Fi Smart Plug with Power Meter
- Voice control compatibility with Amazon Alexa and Google Assistant
- Remote control via smartphone app (Smartlife App)
- Energy consumption monitoring
- Scheduling and timer functions for automated control
- Flame retardant body and surge protection
- No additional hub required; connects directly to 2.4 GHz Wi-Fi router

# SMART CONNECT 1



Control your  
Home Appliances  
from Anywhere

**10A SMART WIFI PLUG**

POWER CONSUMPTION METER



Image 2.1: An illustration highlighting the key features of the smart plug, including Wi-Fi control, app control, scheduling, timing, power consumption meter, remote control, independent switch, and electrical safety.

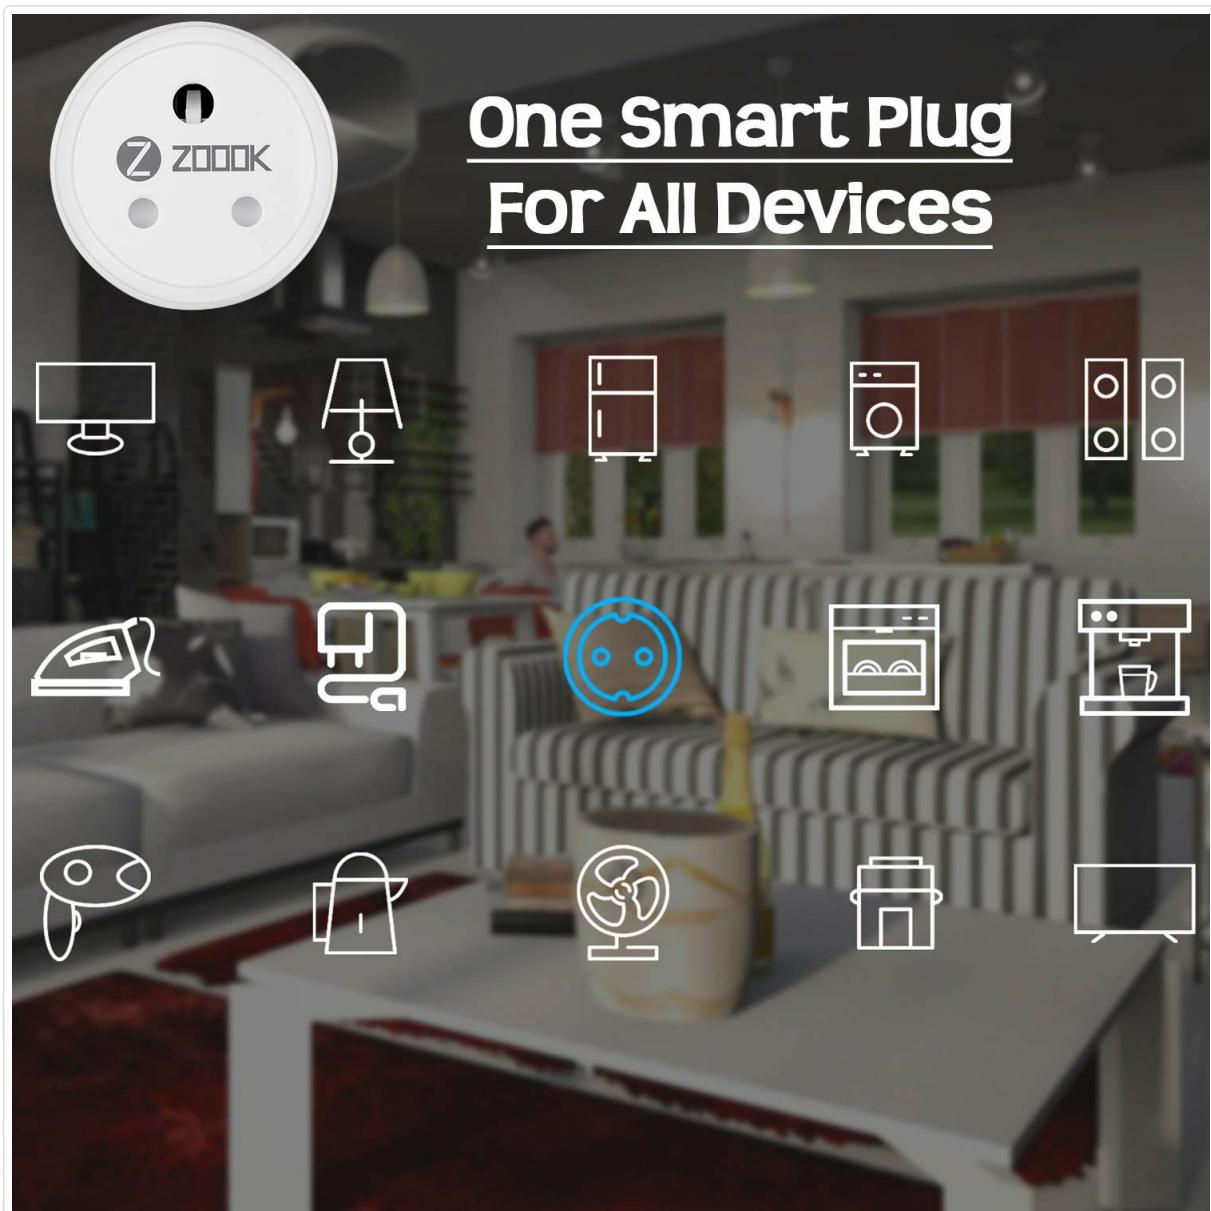


Image 2.2: The smart plug can be used with a variety of household devices such as TVs, lamps, refrigerators, washing machines, irons, kettles, fans, and coffee makers.

### 3. SETUP INSTRUCTIONS

Follow these steps to set up your Zoook Smart Connect 10A Wi-Fi Smart Plug:

- 1. Download the Smartlife App:** Search for "Smartlife" in your smartphone's app store (iOS or Android) and download the application.
- 2. Register/Log In:** Open the Smartlife App and register a new account or log in if you already have one.
- 3. Plug In the Smart Plug:** Insert the Zoook Smart Plug into a standard Type D wall socket.
- 4. Enter Pairing Mode:**
  - Ensure the indicator light on the plug is blinking rapidly. If not, press and hold the power button on the plug for approximately 5 seconds until it starts blinking rapidly.
  - Note:* The rapid blinking indicates the plug is in pairing mode.
- 5. Add Device in App:**
  - In the Smartlife App, tap the "+" icon (usually in the top right corner) to add a new device.

- Select "Electrical" then "Socket (Wi-Fi)" or allow the app to auto-scan for devices.
- Confirm that the indicator light is blinking rapidly.

## 6. Connect to Wi-Fi:

- Enter your 2.4 GHz Wi-Fi network password. *Important:* The smart plug only supports 2.4 GHz Wi-Fi networks. Ensure your phone is connected to a 2.4 GHz network during setup.
- The app will begin connecting to the device. This may take a few moments.

7. **Device Added:** Once successfully connected, you can rename the smart plug for easier identification (e.g., "Living Room Lamp," "Coffee Maker").



Image 3.1: The Smartlife app interface displaying options to add various smart devices, including Wi-Fi sockets, under the "Electrical" category.

## 4. OPERATING INSTRUCTIONS

### 4.1 Remote Control via Smartlife App

After successful setup, you can control your smart plug from anywhere using the Smartlife App:

- Open the Smartlife App and select your smart plug from the device list.

- Tap the power icon to turn the connected appliance ON or OFF.
- Access additional features like scheduling, timers, and power monitoring from the device interface.

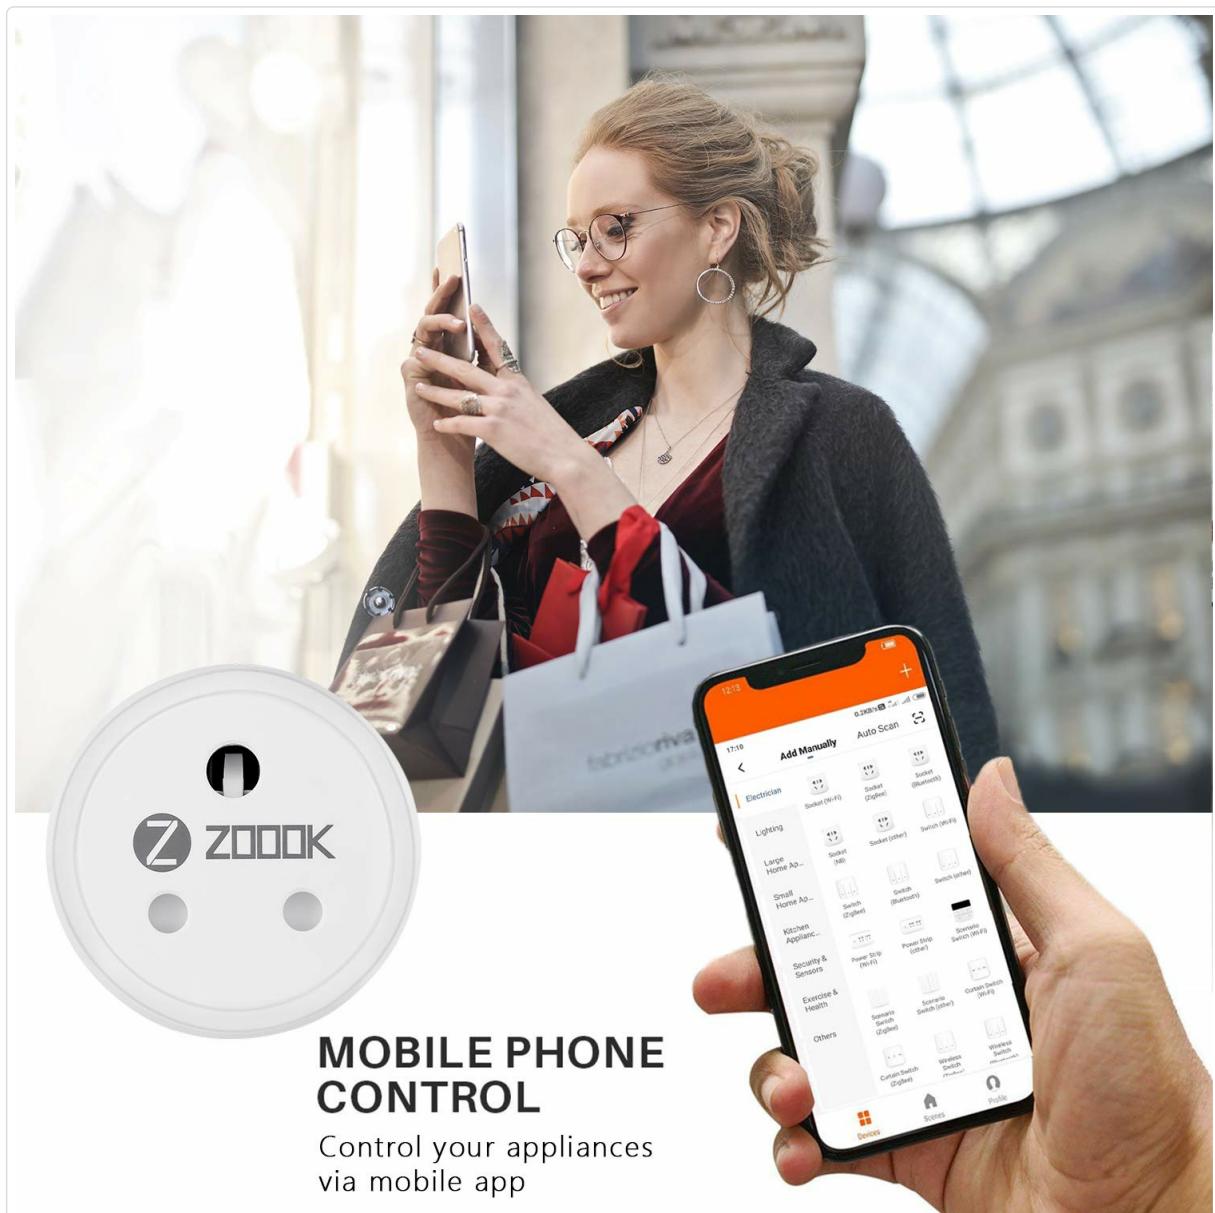


Image 4.1: A user demonstrating mobile phone control of the smart plug, allowing appliances to be managed remotely.

## 4.2 Scheduling and Timer Functions

Automate your appliances with schedules and timers:

- In the Smartlife App, select your smart plug.
- Navigate to the "Schedule" or "Timer" section.
- Set specific times for the plug to turn ON or OFF daily or on selected days.
- Use the countdown timer for temporary operations.

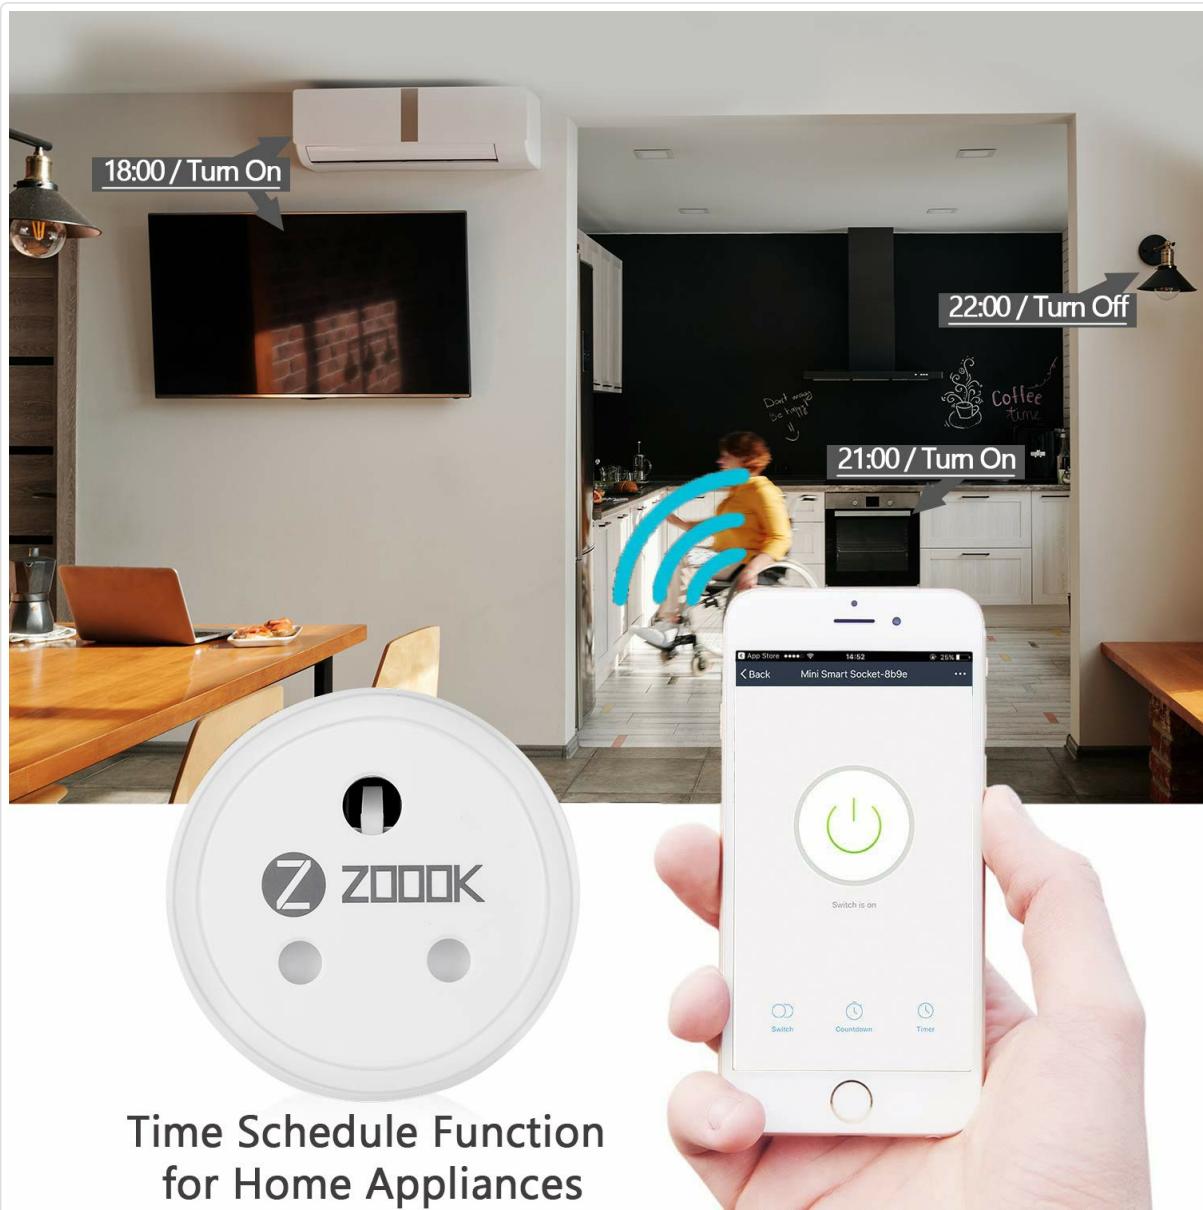


Image 4.2: An illustration of a smart home environment where appliances are controlled by a time schedule function, showing a TV turning on at 18:00 and off at 22:00, and a coffee maker turning on at 21:00.

### 4.3 Voice Control (Alexa & Google Assistant)

Integrate your smart plug with voice assistants for hands-free control:

#### 1. Link Smartlife Account:

- Open the Amazon Alexa app or Google Home app.
  - Go to "Skills & Games" (Alexa) or "Works with Google" (Google Home).
  - Search for "Smartlife" and enable the skill/service.
  - Link your Smartlife account using your Smartlife app credentials.
2. **Discover Devices:** Once linked, ask Alexa or Google Assistant to "Discover devices."
3. **Voice Commands:** You can now control your smart plug using voice commands.
- "Alexa, turn on [Device Name]"
  - "Hey Google, turn off [Device Name]"
  - "Alexa, what is the power consumption of [Device Name]?" (if supported by the voice assistant integration)

# Voice Control

Super convenient when your hands are full



Image 4.3: A user interacting with an Amazon Alexa device to control a coffee maker connected to the smart plug, demonstrating hands-free voice control.

## 5. POWER MONITORING

The Zoook Smart Connect 10A Wi-Fi Smart Plug includes a power meter feature to monitor the energy consumption of connected appliances.

- In the Smartlife App, select your smart plug.
- Look for the "Power Statistics" or "Energy Monitoring" section within the device interface.
- View real-time power usage, daily, weekly, or monthly consumption reports.

## 6. SAFETY INFORMATION AND MAINTENANCE

### 6.1 Safety Precautions

- Do not exceed the maximum load current of 10 Amps.
- Do not use in wet environments or near water.
- Do not disassemble or modify the device.
- Keep out of reach of children.

- Ensure the plug is fully inserted into the wall socket.
- This device is designed for indoor use only.

## 6.2 Maintenance

- Clean the smart plug with a dry, soft cloth. Do not use liquid cleaners.
- Regularly check for any signs of damage or wear.

## 7. TROUBLESHOOTING

Problem	Possible Cause	Solution
Smart plug not connecting to Wi-Fi.	<ul style="list-style-type: none"> <li>• Incorrect Wi-Fi password.</li> <li>• Not connected to 2.4 GHz Wi-Fi.</li> <li>• Plug not in pairing mode.</li> <li>• Weak Wi-Fi signal.</li> </ul>	<ul style="list-style-type: none"> <li>• Verify Wi-Fi password.</li> <li>• Ensure your router is broadcasting a 2.4 GHz network and your phone is connected to it during setup.</li> <li>• Press and hold the power button on the plug for 5 seconds until the indicator blinks rapidly.</li> <li>• Move the smart plug closer to your Wi-Fi router.</li> </ul>
Voice control not working.	<ul style="list-style-type: none"> <li>• Smartlife account not linked to Alexa/Google Assistant.</li> <li>• Device not discovered.</li> <li>• Incorrect device name.</li> </ul>	<ul style="list-style-type: none"> <li>• Ensure the Smartlife skill/service is enabled and linked in your Alexa/Google Home app.</li> <li>• Ask Alexa/Google Assistant to "Discover devices."</li> <li>• Use the exact device name configured in the Smartlife App.</li> </ul>
Appliance not turning ON/OFF.	<ul style="list-style-type: none"> <li>• Smart plug is offline.</li> <li>• Appliance is not powered on or faulty.</li> <li>• Overload protection triggered.</li> </ul>	<ul style="list-style-type: none"> <li>• Check Wi-Fi connection and smart plug status in the app.</li> <li>• Ensure the appliance itself is functional and its power switch is ON.</li> <li>• Unplug the appliance, reduce the load, and plug it back in.</li> </ul>

## 8. SPECIFICATIONS

Model	Smart Connect 1
Brand	Zook
Plug Type	Type D
Amperage	10 Amps
Connectivity	Wi-Fi (2.4 GHz only)

<b>Compatible Devices</b>	Smartphones (iOS/Android), Amazon Alexa, Google Assistant
<b>Product Dimensions</b>	5 x 5 x 5 cm
<b>Item Weight</b>	70 g
<b>Special Features</b>	Power Meter, Surge Protection, Flame Retardant Body

## 9. WARRANTY AND SUPPORT

### 9.1 Warranty Information

The Zoook Smart Connect 10A Wi-Fi Smart Plug comes with a **1 Year Warranty** from the date of purchase. Please retain your purchase receipt for warranty claims. The warranty covers manufacturing defects but does not cover damage caused by misuse, accidents, unauthorized modifications, or normal wear and tear.

### 9.2 Customer Support

For technical assistance, troubleshooting, or warranty claims, please contact Zoook customer support:

- **Manufacturer:** Intellegent Technologies Traders Limited
- **Importer:** 18001033544
- Visit the official Zoook website for more support options and FAQs.