

## Phomemo D30

# Phomemo D30 Bluetooth Mini Label Maker User Manual

Model: D30

## 1. INTRODUCTION

---

This manual provides detailed instructions for the safe and effective use of your Phomemo D30 Bluetooth Mini Label Maker. Please read this manual thoroughly before operating the device to ensure proper function and longevity.



Image 1.1: The Phomemo D30 Label Maker, a compact thermal printer designed for various labeling needs.

## 2. PACKAGE CONTENTS

Verify that all items are present in your package:

- 1 x Phomemo D30 Label Maker
- 1 x User Manual
- 1 x USB Cable

- 80-PCS Label Tape 12x40mm (1 roll)

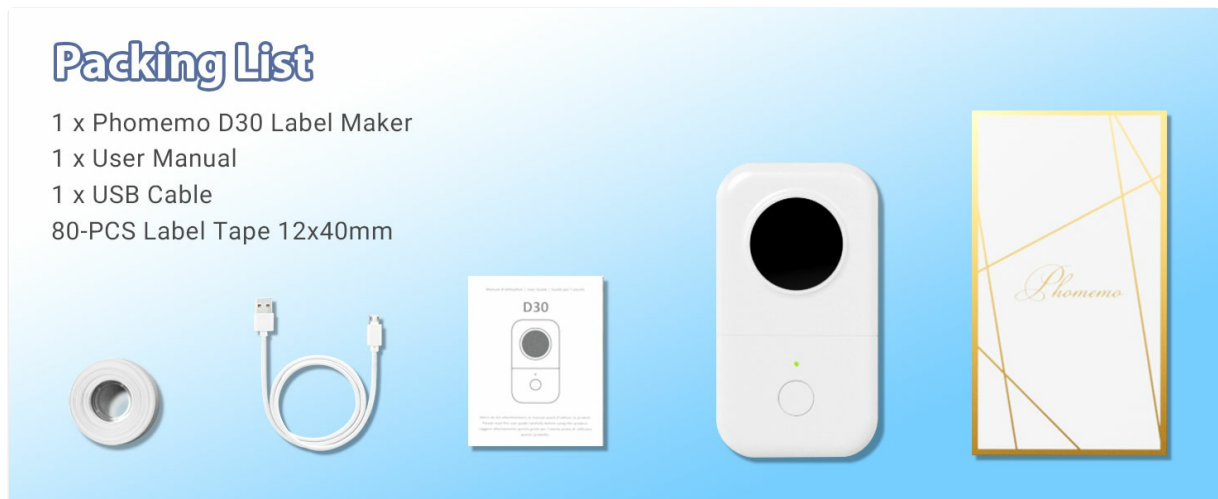


Image 2.1: Visual representation of the items included in the Phomemo D30 package.

## 3. PRODUCT OVERVIEW

### 3.1 Key Features

- **Compact and Portable:** Half the weight and size of traditional label makers.
- **Thermal Printing Technology:** Inkless printing, eliminating the need for ink, toner, or ribbons.
- **High Print Clarity:** Equipped with a German thermal print head, offering 25% increased DPI for clear and smooth printing.
- **Wireless Connectivity:** Bluetooth connection for printing from mobile devices.
- **Versatile Label Support:** Compatible with continuous and fixed-length label tapes, supporting sizes from 0.24 to 0.47 inches (6mm to 12mm).
- **App-Controlled:** Utilizes a dedicated mobile application for label design with various templates, symbols, frames, and fonts.

### 3.2 Components

The Phomemo D30 Label Maker consists of the following main components:

- **Power Button:** Used to turn the device on/off and initiate certain functions.
- **Indicator Light:** Displays device status (e.g., charging, connected, printing).
- **Label Output Slot:** Where printed labels emerge.
- **Label Compartment:** Houses the label roll.
- **USB Charging Port:** For connecting the USB cable to charge the device.

## INK-LESS WIRELESS COMPACT



Image 3.1: The compact design of the Phomemo D30, highlighting its ink-less thermal printing technology.

# Multifunctional Label Printer

## Can print with **4** sizes label

---



Image 3.2: The Phomemo D30 supports multiple label widths, including 6mm, 12mm, 14mm, and 15mm.

## 4. SETUP

---

### 4.1 Charging the Device

1. Connect the provided USB cable to the charging port on the label maker.
2. Plug the other end of the USB cable into a compatible USB power adapter (not included) or a computer's USB port.
3. The indicator light will show charging status. A full charge typically takes 2-3 hours.

### 4.2 Loading Label Paper

1. Open the label compartment cover.
2. Insert the label roll with the printing surface facing upwards, ensuring it aligns correctly within the compartment.
3. Pull a small portion of the label tape out through the output slot.
4. Close the label compartment cover securely.

### 4.3 App Installation and Bluetooth Connection

1. Download the "Print Master" app from your device's app store (iOS or Android).



2. Turn on the Phomemo D30 Label Maker by pressing and holding the power button. The indicator light will illuminate.
3. Enable Bluetooth on your mobile device.
4. Open the "Print Master" app and follow the on-screen instructions to connect to your D30 device. The app will typically detect nearby Phomemo devices automatically.




Image 4.1: The Phomemo D30 connects wirelessly via Bluetooth to a smartphone running the "Print Master" app.

## 5. OPERATING INSTRUCTIONS

### 5.1 Creating Labels with the App

1. Open the "Print Master" app on your connected mobile device.
2. Select a template or start a new label design.
3. Utilize the app's features to add text, icons, borders, and adjust fonts. The app offers a wide variety of customization options.
4. Preview your label design to ensure accuracy before printing.

# Powerful APP 「Print Master」

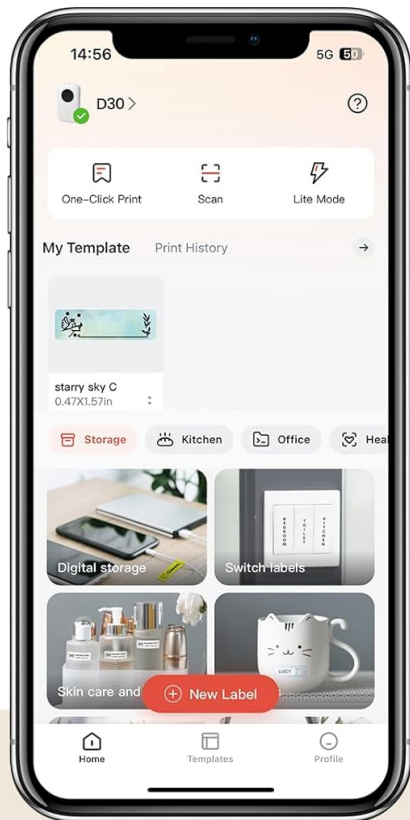

## Hundreds of Free Patterns

### Fonts

**Printer**  
**Printer**  
**Printer**  
**Printer**  
**Printer**

### Language

智能标签机  
라벨 메이커  
ラベルメーカー  
Label Maker  
Etikettenhersteller  
Étiquetteuse  
Producent  
etykiet  
Etichettatrice  
Производитель  
ЭТИКЕТОК

### Icons



### Borders

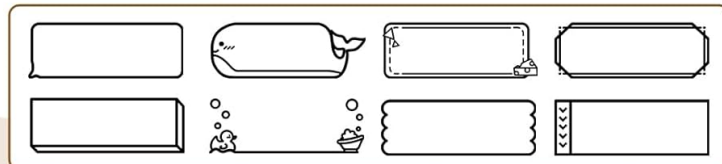


Image 5.1: The "Print Master" app provides extensive customization options for label creation, including fonts, icons, and borders.

## Multiple Labels Styles

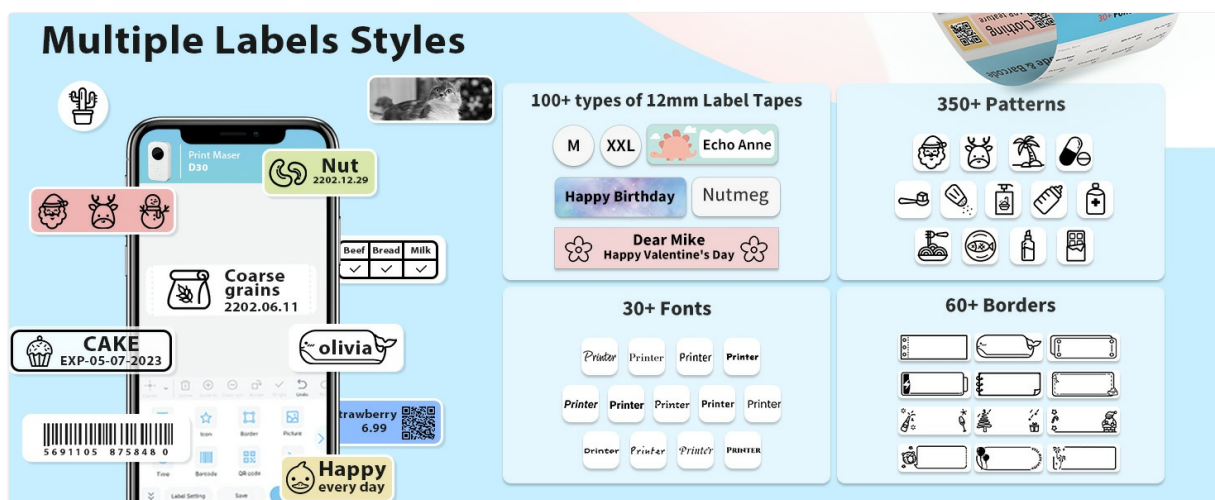


Image 5.2: The app supports a variety of label styles and patterns for diverse applications.

## 5.2 Printing Labels

1. Once your label design is complete, tap the print button within the app.
2. The label maker will feed and print the label.
3. Carefully tear off the printed label from the output slot.

# HIGH-QUALITY PRINTING

Support Batch Printing Pre-cut Paper



Image 5.3: The D30 supports high-quality batch printing for pre-cut paper, ensuring clear and consistent results.

## 5.3 Label Types and Applications

The D30 supports both pre-cut and continuous label tapes, suitable for various uses:

- **Pre-cut Labels:** Ideal for individual items, such as food date marking, price tags, or personal item identification.
- **Continuous Labels:** Suitable for longer labels like cable identification, file classification, or gift labels.



### Pre-Cut Labels




### Continuous Labels



Image 5.4: The Phomemo D30 supports both pre-cut labels for individual items and continuous labels for longer applications.

## Your Great Life Assistant

### File Classification

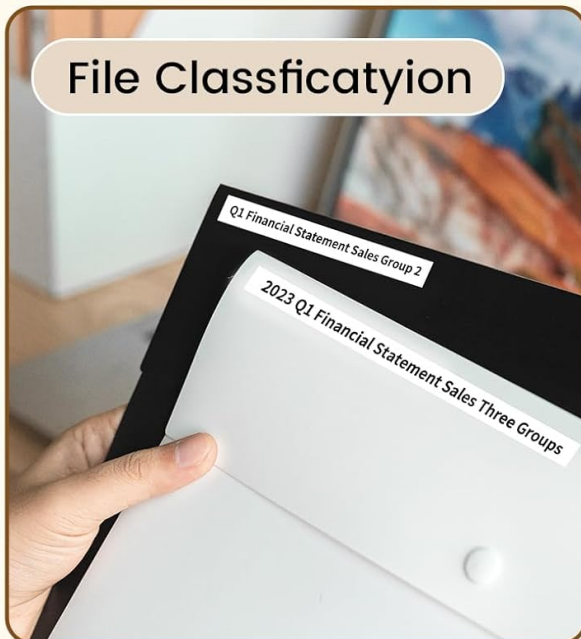

### Food Label



### Item Storage



### Gift Label



Image 5.5: The Phomemo D30 is a versatile tool for organizing files, labeling food, marking items, and creating gift labels.

## Wide Applications



Image 5.6: The D30 label maker is suitable for a wide range of applications, from personal organization to small business use.

## 6. MAINTENANCE

### 6.1 Cleaning the Print Head

To maintain print quality, regularly clean the print head:

1. Turn off the label maker and disconnect it from any power source.
2. Open the label compartment.
3. Gently wipe the print head with a cotton swab lightly dampened with isopropyl alcohol.
4. Allow the print head to dry completely before closing the compartment and using the device.


### 6.2 Battery Care

- Charge the device regularly, even if not in frequent use, to prolong battery life.
- Avoid exposing the device to extreme temperatures.
- If the device will not be used for an extended period, charge it to approximately 50% before storage.

### 6.3 Storage

Store the label maker in a cool, dry place away from direct sunlight and excessive dust. Ensure the label compartment is closed to protect the print head and internal mechanisms.

# Stable Label Tape

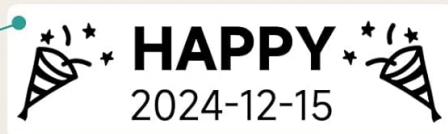

Waterproof



Abrasion Resistant



No Leave Trace



Oilproof

Image 6.1: Phomemo label tapes are designed for durability, offering resistance to water, abrasion, and oil, and can be removed without leaving residue.

## 7. TROUBLESHOOTING

### 7.1 Common Issues and Solutions

Issue	Possible Cause	Solution
Device does not turn on	Low battery or power issue.	Charge the device using the provided USB cable. Ensure the power button is pressed and held correctly.
Cannot connect via Bluetooth	Bluetooth is off, device is out of range, or app issue.	Ensure Bluetooth is enabled on your phone and the label maker is on. Move the devices closer. Restart the app and the label maker.
Poor print quality	Dirty print head, incorrect label roll insertion, or low battery.	Clean the print head (refer to Section 6.1). Re-insert the label roll correctly. Charge the device.
Labels not feeding	Label roll jammed or incorrectly loaded.	Open the compartment and check for any jams. Re-load the label roll, ensuring it is properly aligned.



Issue	Possible Cause	Solution
App crashes or freezes	Software glitch or outdated app version.	Restart the app. Check for app updates in your device's app store. Restart your mobile device.

## 8. SPECIFICATIONS



- **Brand:** Phomemo
- **Model:** D30
- **Printing Technology:** Thermal
- **Connectivity Technology:** Bluetooth
- **Maximum Media Size:** 15mm
- **Maximum Black and White Print Resolution:** 203 dpi
- **Max Print Speed Monochrome:** 40 ppm
- **Compatible Devices:** Smartphones (iOS, Android)
- **Power:** 1 Lithium Polymer battery (included)
- **Item Weight:** 6.3 ounces (180 Grams)
- **Product Dimensions:** 4.72 x 3.15 x 1.97 inches (12 x 8 x 5 cm)
- **UPC:** 789371387780

## 9. WARRANTY AND SUPPORT

The Phomemo D30 Label Maker comes with a limited warranty. For specific details regarding warranty coverage and duration, please refer to the warranty card included in your product packaging or contact Phomemo customer support.


For technical support, troubleshooting assistance, or inquiries about replacement parts and accessories, please visit the official Phomemo website or contact their customer service department. Contact information can typically be found on the product packaging or the Phomemo brand store online.













### Related Documents - D30

<div>Quick Start Guide</div> <div>D30</div>  <div>English</div>	<div> <a href="#">Phomemo D30 Label Maker Quick Start Guide</a> </div> <div>           A quick start guide for the Phomemo D30 Label Maker, covering product introduction, getting started, replacing the paper roll, connection methods, charging, and button/indicator light instructions.         </div>
<div>Instruction</div> <div>D30 Product Instruction</div>  <div><small>Please read the book when before using and fully follow operating the product.</small></div>	<div> <a href="#">D30 Smart Mini Label Maker Instruction Manual</a> </div> <div>           Comprehensive instruction manual for the D30 Smart Mini Label Maker, covering specifications, parts, operation, app download, and connectivity for efficient label printing.         </div>
<div>Instruction</div> <div>D30 Product</div>	







Function	Description
	Click to insert text. Use <b>OK</b> to edit the text box, <b>Spelling and Grammar</b> to check spelling, and <b>OK</b> to close the text box.
	On a function, click to insert all kinds of data items.
	Click border function, and choose various rule borders to decorate your table.
	Click to insert the picture you want to edit and print.
	Insert data and specific times.
	Click to scan the code to identify. It can quickly identify the text content in the QR code.
	Click to insert a one-dimensional code. Enter the information to be added, then a one-dimensional code can be automatically generated. The layout can be adjusted.
	Click to insert a QR code. Enter the information to be added, then a QR code can be automatically generated, and the layout can be adjusted.
	Insert a line. Users can choose a dashed line or a solid line.
	Click to insert and expand square graphs.
	Support table input, therefore quickly generating a list that needs to be printed.
	Click to recognize text in the picture.



Product name	Small Label Printer
Product model	Q38
Printing technology	Thermal printing
Effective printing width	12mm
Supported consumables	Pre-cut paper, black mark paper, continuous paper
Printing density	Light, standard, dark
Printing resolution	283 dpi
Print head service life	50 K00
Communication interface	Bluetooth 4.2
Product size	121.75*52.2mm (5.2*2.0*2.0in)
Power Input	5V = 2A
Power supply method	Micro USB Lithium battery
Supported operating system	Android iOS


## 10. Daily Cleaning



**Phase check** Whether the paper roll is correctly placed in the machine?

Comprehensive instruction manual for the Phomemo D30 Small Label Printer, covering setup, app download, paper installation, printer connection, printing guides (Lite and Creation modes), product specifications, daily cleaning, and troubleshooting common issues.





#### 05. App Download Method



#### 06. Label Maker Connection




#### 07. Confirm the Label Size




#### 08. Printing Guide Select Edit Version



#### 09. Printing Guide Lite Mode



#### 10. Printing Guide Creation Mode



#### 11. Daily Cleaning



#### 12. Solutions for Common Problems



#### 13. Product Warranty



#### 14. FCC Caution




#### 15. Warranty/Maintenance Card






Thank you for choosing our products!

## [Phomemo D35 Wireless Bluetooth Label Maker: User Guide and Features](#)

A comprehensive user guide for the Phomemo D35 wireless Bluetooth label maker. Learn how to set up, use the smartphone app, and print custom labels for home and office organization with this portable mini label printer.

	<p><a href="#">Phomemo D30 Small Label Printer User Manual and Setup Guide</a></p> <p>Comprehensive user manual for the Phomemo D30 Small Label Printer, covering product features, app download, boot guide, paper roll installation, printer connection, printing instructions (Lite and Creation modes), product specifications, daily cleaning, troubleshooting common problems, warranty information, and FCC caution.</p>
-----------------------------------------------------------------------------------	---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

Documents - Phomemo – D30

	<p><a href="#">[pdf] Dimension Guide Guide Label</a></p> <p>D30A            20230310 Instruction TakeSpec ComAfter installing the label roll for first time or replacing remember to reposition Step No 7user guidetakespec view document 1790 5682 phomemo d30 user guide    </p> <p>Instruction <b>D30</b> Please read this instruction book carefully before operating the product. 01. Item Checklist Label Maker*1 Instruction Manual*1 USB Cable*1 The number of label rolls on the checklist is determined by NOTE the contents of the shipped package. 0022.. SPpreocdiuficctaStipoencsi...</p> <p>lang:en <b>score:34</b> filesize: 1.56 M page_count: 10 document date: 2023-08-03</p>
	<p><a href="#">Phomemo Brand Book 2025: Fun Memo</a></p> <p>Explore the Phomemo brand book for 2025, detailing the Phomemo story, products, and media presence. Discover the company's journey, its innovative printing solutions, and its vibrant community.</p> <p>lang:en <b>score:27</b> filesize: 5.61 M page_count: 39 document date: 2025-01-22</p>
	<p><a href="#">Phomemo D30 Label Maker Quick Start Guide</a></p> <p>A quick start guide for the Phomemo D30 Label Maker, covering product introduction, getting started, replacing the paper roll, connection methods, charging, and button/indicator light instructions.</p> <p>lang:en <b>score:24</b> filesize: 2.23 M page_count: 12 document date: 2025-03-21</p>

## Quick Start Guide

**D30**



English


[\[pdf\]](#) Quick Start Guide Installation Guide Instructions Guide Label

D30 User Guide EN 241127 Phomemo Label Maker Machine Bluetooth Mini for Kids School Items Inkless Thermal Printer Portable Sticker Classroom Home Small Business Organizing Black 1 Roll Paper SV B0FCST41J7 B0BBT7ZFBY B09Y8Y925N B08DXHFKB1 B08HV3MPFD B08HVMF9QL B0DWSM5Q3N B0DX1BYWPL B1iBvQcWtrL m media amazon images l |||

Quick Start Guide **D30** English 1. Product Introduction 1.1 Packing List Printer1 Single unit Quick Start Guide1 USB Cable1 100-Pc 12\*40 mm Paper Roll 1 Installed in printer OR Package ... Paper Roll n Quantity and size tailored to your purchased package 1.2 Printer Parts Instruction Top Cover...

lang:en **score:24** filesize: 2.44 M page\_count: 12 document date: 2024-11-27



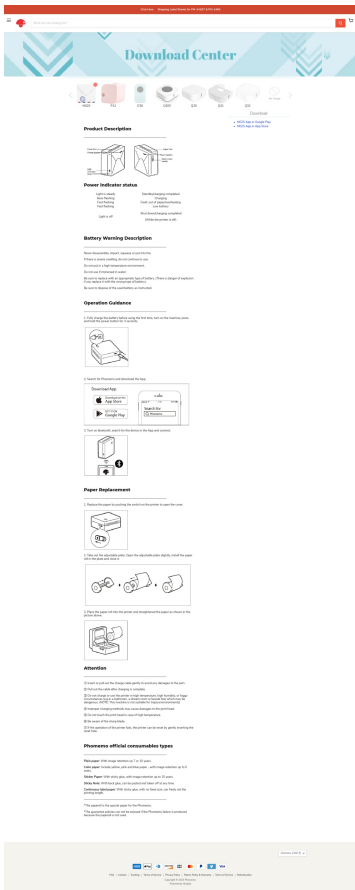

[Phomemo Portable Thermal Printer User Guide & Operation Manual](#)

Comprehensive user guide for Phomemo portable thermal printers, including models like M02S, D30, and Q30S. Learn about product features, power indicators, battery safety, app download, Bluetooth connection, and paper replacement. Discover official Phomemo consumables.

lang:en score:22 filesize: 487.31 K page\_count: 1 document date: 2023-09-20

## Instruction

**D30** Product Instruction



Please read this instruction book carefully before operating the product.

### [D30 Smart Mini Label Maker Instruction Manual](#)

Comprehensive instruction manual for the D30 Smart Mini Label Maker, covering setup, operation, specifications, and troubleshooting. Learn how to use your thermal label printer effectively.

lang:en score:21 filesize: 1.56 M page\_count: 10 document date: 2023-08-03

### Set up Your Print Master



### [Print Master Printer Setup Guide](#)

Learn how to quickly set up your Print Master printer, including turning it on, downloading the Print Master app, and connecting via Bluetooth.

lang:en score:20 filesize: 115.38 K page\_count: 1 document date: 2024-09-25

## Instruction

**D30** Product Instruction



Please read this instruction book carefully before operating the product.

### [D30 Smart Mini Label Maker Instruction Manual](#)

Comprehensive instruction manual for the D30 Smart Mini Label Maker, covering specifications, parts, operation, app download, and connectivity for efficient label printing.

lang:en score:19 filesize: 1.56 M page\_count: 10 document date: 2023-06-29

## Instruction

**D30** Product Instruction

From Label Online



Please read this instruction book carefully before operating the product.

### [D30 Smart Mini Label Maker Instruction Manual](#)

Comprehensive instruction manual for the LabelOnline D30 Smart Mini Label Maker, covering specifications, setup, app usage, printing modes, troubleshooting, and warranty information.

lang:en score:19 filesize: 6.15 M page\_count: 17 document date: 2022-05-27

## Instruction

**D30** Product Instruction




Please read this instruction book carefully before operating the product.

### [\[pdf\] Guide Label](#)

1 Phomemo Label Maker D30 Labeler Sticker Printer Machine Portable Bluetooth for School Office Home Organization Back to Supplies Kids Teacher USB Rechargeable Green Paperphomemo d30 User Guide Paper B0CDSJQ41Z B0C7BWCLM2 B08DNL5ZLF B08LFY9YVN B08DNLJDVF B0C7BX6ZCN B08RHHQ8PD9C1CD6i rUmLm media amazon images I C1CD6i rUmL |||

...

lang:en score:19 filesize: 5.06 M page\_count: 17 document date: 2022-05-05

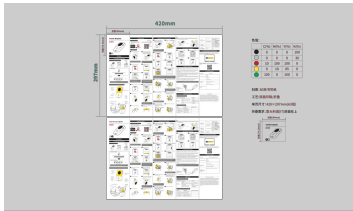

QUIN 珠海德印科技有限公司  
Zhuhai Quin Technology Co., Ltd.

### [QUIN D30 Label Printer Quick Start Guide](#)

Learn how to set up and use your portable QUIN D30 label printer with this quick start guide. Includes app download instructions, label roll replacement, connection methods, charging, and troubleshooting.

lang:it score:18 filesize: 5.3 M page\_count: 3 document date: 2024-09-27

### Instruction D30 Product Instruction



Please read this instruction book carefully before operating the product.

### [D30 Smart Mini Label Maker Instruction Manual](#)

Comprehensive instruction manual for the D30 Smart Mini Label Maker, covering setup, operation, specifications, app usage, printing modes, troubleshooting, and warranty information for thermal printing.

lang:it score:18 filesize: 5.06 M page\_count: 17 document date: 2022-05-05

### Instruction D30 Product Instruction




Please read this instruction carefully before using this product and keep it properly.  
For more detailed information, please check the official website: [www.phomemo.com](http://www.phomemo.com)

### [Phomemo D30 Small Label Printer User Manual and Setup Guide](#)

Comprehensive user manual for the Phomemo D30 Small Label Printer, covering product features, app download, boot guide, paper roll installation, printer connection, printing instructions (Lite and Creation modes), product specifications, daily cleaning, troubleshooting common problems, warranty information, and FCC caution.

lang:it score:18 filesize: 1.85 M page\_count: 28 document date: 2021-08-13

### Instruction D30 Product Instruction



Please read this instruction carefully before using this product and keep it properly.  
For more detailed information, please check the official website: [www.phomemo.com](http://www.phomemo.com)



Operation guide QR code

Please scan the QR code to get the printer operation guide.

#### Table of Contents

<b>01</b> Packing List	<b>02</b> Parts Description • Appearance • Power Button and Indicator Light	<b>03</b> App Download Method	<b>04</b> Boot Guide
<b>05</b> Paper Roll Installation	<b>06</b> Printer Connection	<b>07</b> Confirm the Label Size	<b>08</b> Printing Guide • Select Edit Version • Lite Mode • Creation Mode
<b>09</b> Product Specifications	<b>10</b> Daily Cleaning	<b>11</b> Solutions for Common Problems	
<b>12</b> Product Warranty	<b>13</b> FCC Caution	<b>14</b> Warranty / Maintenance Card	

#### 01.Packing List



Printer\*1


Product instruction\*1

Charging line\*1

The number of paper rolls in the list is subject to the actual shipment.

## 02.Parts Description / Appearance Introduction

### 01 Printer display




### 02 Label paper display

Various labels available for purchase



## 02.Parts Description / Power Button and Indicator Light



### Power button description

Button	Operation method	Functions
Power button	Press and hold 2s	Turn on/off
	Click	Print out the paper
	Double click	Print the content of the self-test paper

### Power indicator status

● Green-Keep on	Normal status (printing)
✦ Green-Flash slowly	Charging with power on
✦ Green-Flash quickly	Charging with power on
● Red-Keep on	Error (lack of paper, cover opened, high temperature)
✦ Red-Flash slowly	10% battery
✦ Red-Flash quickly	5% battery

## 03.App Download Method




**NOTE**  
This product needs to be connected to the printer in the App.  
Due to the requirements of mobile phone system, the Android mobile phone will use the user's geographic location when connecting, so that the user needs to turn on the GPS and confirm the authorization.

Method I: Please use your mobile phone to scan the QR code to download the App  
Method II: Search and download to scan the QR code to download the App




## 04.Boot Guide

### 01 Press and hold for 2s to turn on




### 02 Open the paper compartment cover of the machine




## 05.Paper Roll Installation


### 01 Take out the label paper, tear off the anti-loosening sticker




### 02 Put the printing paper in the compartment with the printing side left



### 03 Pull out the label paper by 5mm in length for normal printing



### 04 Close the paper compartment cover of the machine




### 05 Click the power button to identify the label position



### 06 Come out a piece of paper, positioning completed



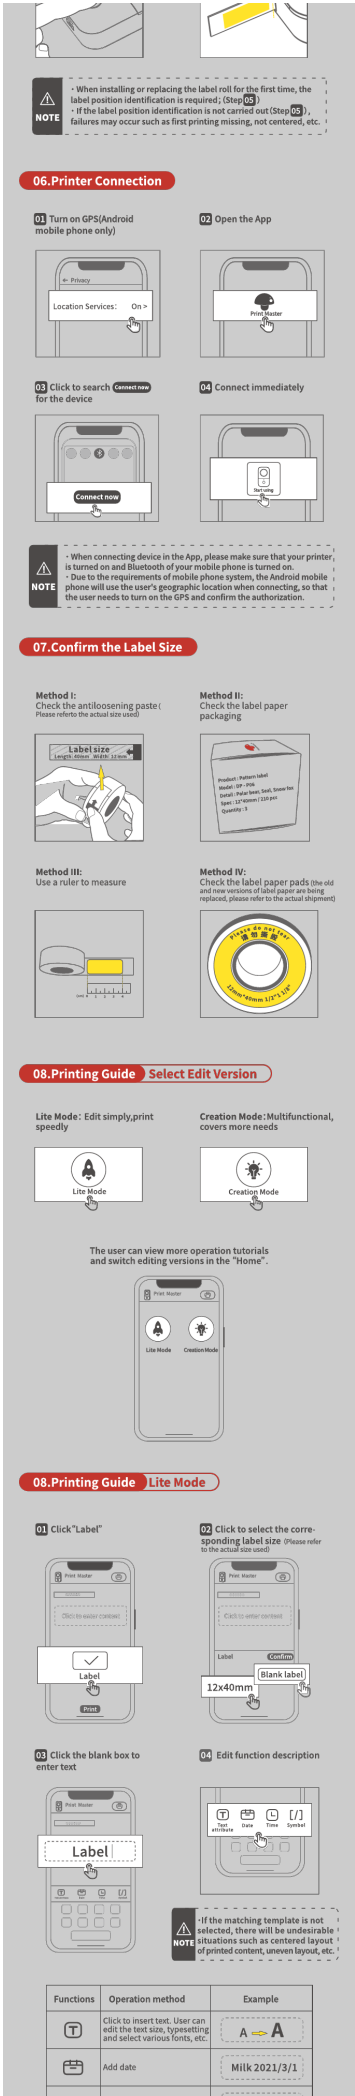

[Phomemo D30 Small Label Printer Instruction Manual](#)

Comprehensive instruction manual for the Phomemo D30 Small Label Printer, covering setup, app download, paper installation, printer connection, printing guides (Lite and Creation modes), product specifications, daily cleaning, and troubleshooting common issues.

lang:it score:17 filesize: 1.8 M page\_count: 1 document date: 2021-08-13




	Edit specific time point	Milk 18:44 pm
	Unit symbol	Milk 500ml

09 After editing, click to "Print"



09 After the printing is completed, tear off the label




## 08.Printing Guide Creation Mode

01 Click the size box and select corresponding label size



02 Click to select the corresponding label size (Please refer to the actual size used)



If the corresponding size template is not selected correctly, there will be undesirable situations such as centered printing layout and uneven layout, etc.

03 Click "T" to input text



04 Edit function description



Editing function



Editing function



App functions will be updated with new functions in irregular, please refer to the actual function.

Functions	Description
	Click to insert text. User can edit the text size, typesetting and select various fonts, etc.
	Icon function, click to insert all kinds of cute icons.
	Click border function, and choose various cute borders to decorate your label.
	Click to insert the picture you want to edit and print.
	Insert date and specific time.
	Click to scan the code to identify. It can quickly identify the text content in the QR code.
	Click to insert a one-dimensional code. Enter the information to be edited, then a one-dimensional code can be automatically generated, and the layout can be adjusted.
	Click to insert a QR code. Enter the information to be edited, then a QR code can be automatically generated, and the layout can be adjusted.
	Insert a line. User can choose a dashed line or a solid line.
	Click to insert round or square shapes.
	Support table import, therefore quickly generating a list that needs to be printed.
	Click to recognize text in the picture.

05 Click the print label after editing



05 After the printing is completed, tear off the label



## 09.Product Specifications

Product name	Small Label Printer
Product model	D30
Printing technology	Thermal printing
Effective printing width	12mm
Supported consumables	Pre-cut paper, black mark paper, continuous paper
Printing density	Light, standard, dark
Printing resolution	203 dpi
Print head service life	50 KM
Communication interface	Bluetooth 4.2
Product size	131.5*75.5*29 mm (5.2*2.9*1.2 inch)
Power Input	5V=2A
Power supply method	Micro USB Lithium battery
Supported operating system	Android iOS

## 10.Daily Cleaning

01 Turn off the printer




02 Use a cotton swab dipped in a little alcohol





**03** Wipe the print head gently



**04** Wait for the alcohol to evaporate and then turn it on and double click the power button to print labels



Do not scratch the print head with hard objects, otherwise the thermal film will be permanently damaged and cannot be repaired).

## 11.Solutions for Common Problems

Not centered, misplaced, offset, skipped, etc.

**Please check** Whether the paper roll is correctly placed in the machine? Please make sure that the label is placed in the machine with printing side facing left. If it is placed incorrectly (reversed), printing will fail.

**Please check** Whether to select the corresponding label size and pattern in the App? Whether the matching label size and pattern have been selected in the App. Please confirm the size and pattern on the label packaging, and select the matching template in the App.

**Please check** After the machine is turned on, whether to click the power button to allow the machine to calibrate and position the label? When installing or replacing label paper roll for the first time, the user needs to click the power button to print a blank label so that the print head can identify the position of label paper.

**Printing blurry**

**Please check** Whether the power of machine is sufficient. On the "Profile" page, click "Printer" to view the specific power level. If the remaining power of printer is less than 10%, you can charge it for at least half an hour before use.



**Please check** Whether the power of machine is sufficient.

There is foreign matter or glue on the print head. Please use a cotton swab dip with a little alcohol to gently wipe the dirt on the print head. Do not turn on the machine immediately after wiping. After the alcohol is evaporated and dry, double-click the power button to print the self-check page after turning on the machine to check the effect.

**Printer cannot be connected**

**Please check** The status of the printer is on, and the mobile phone bluetooth has been turned on?

**Please check** Is the device connection performed in App? This product needs to perform the device connection in App.

**Please check** Is the mobile phone authorized?

Because of the phone system's requirements, Android phones will use your location when it is connected, and you need to turn on GPS and confirm authorization (other phone systems don't need to turn on this function).



## 12.Product Warranty

Thank you for choosing the Small Label Printer.

① We will provide customers with reliable "replacement/return" support during the one-year warranty period from the date of purchase;  
② Please keep the warranty card in a safe place so that you can read it when needed.

support@phomemo.com

www.phomemo.com

▶ **Video** Please scan the QR code to get the printer operation guide.



Operation guide QR code

This manual has been carefully checked. If there are printing errors or misunderstandings in the content, please consult customer service.  
Note: If the supporting software is updated, it will be compiled into the new version of the manual without notice.

## 13.FCC Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.



RF warning for Portable device:  
The device has been evaluated to meet general RF exposure requirement.

## 13.Warranty/Maintenance Card

☐ Replace

☐ Return

User Information	Name: _____ Gender: _____ Phone: _____
	Address: _____
Product Information	Date of purchase: _____
	Product order number: _____
Reason for Return (Replace/Repair/Request Maintenance)	Product serial number: _____
	Fault description: _____

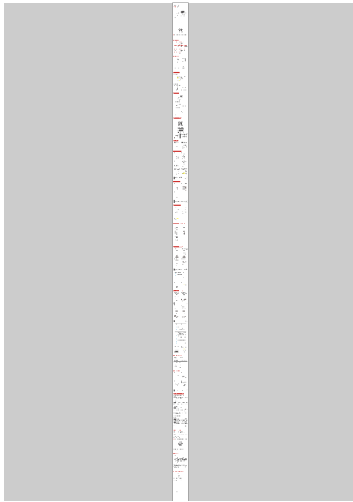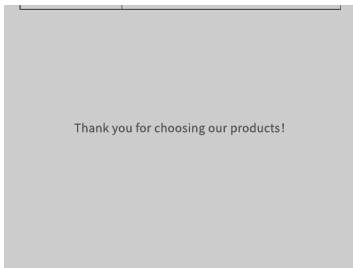

### [Niimbot D30 Portable Label Printer Instructions and Specifications](#)

Comprehensive instructions and specifications for the Niimbot D30 portable thermal label printer, covering setup, app connection, operation, troubleshooting, and warranty information.

lang:it **score:17** filesize: 7.63 M page\_count: 1 document date: 0000-00-00



### [DYMO LetraTag 200B Bluetooth Labeler: Compact, App-Controlled Label Maker](#)

Discover the DYMO LetraTag 200B Bluetooth labeler, a compact and intuitive device for home, school, or office. Connects to smartphones/tablets via the DYMO app, uses sustainable LetraTag tapes, and offers direct thermal printing without ink. Ideal for creative crafting, home organization, and mobile labeling.

lang:en **score:15** filesize: 1.22 M page\_count: 12 document date: 2022-04-26



### [Phomemo D30 Small Label Printer Instruction Manual](#)

Discover the Phomemo D30 Small Label Printer user manual, providing comprehensive instructions for setup, operation, app connectivity, paper installation, printing guides (Lite and Creation modes), product specifications, daily cleaning, and troubleshooting common issues. Optimize your labeling tasks with this portable thermal printer.

lang:en **score:13** filesize: 1.85 M page\_count: 28 document date: 2024-01-15