Greenote AP10

Greenote AP10 Air Purifier User Manual

Model: AP10

1. Introduction

Thank you for choosing the Greenote AP10 Air Purifier. This manual provides essential information for the safe and efficient operation, maintenance, and troubleshooting of your device. Please read it thoroughly before use and retain it for future reference.



Image: The Greenote AP10 Air Purifier, a compact white cylindrical device, is shown in a modern living space, demonstrating its aesthetic integration into a home environment.

2. Important Safety Instructions

To reduce the risk of fire, electric shock, or injury, always follow these basic precautions:

- Read all instructions before operating the appliance.
- Do not operate any fan with a damaged cord or plug. Discard fan or return to an authorized service facility for examination and/or repair.
- Do not run cord under carpeting. Do not cover cord with throw rugs, runners, or similar coverings. Arrange cord away from traffic area and where it will not be tripped over.
- Do not use outdoors.
- Unplug the air purifier before cleaning or performing any maintenance.
- Do not block air openings.
- Keep the appliance away from water or other liquids.
- This appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.

3. Product Overview

The Greenote AP10 Air Purifier features a 3-in-1 H13 True HEPA filtration system designed to capture 99.97% of ultrafine particles, including PM2.5, pet dander, and cooking smells. It operates quietly and is suitable for rooms up to 430 sq. ft.

3.1 Filtration System

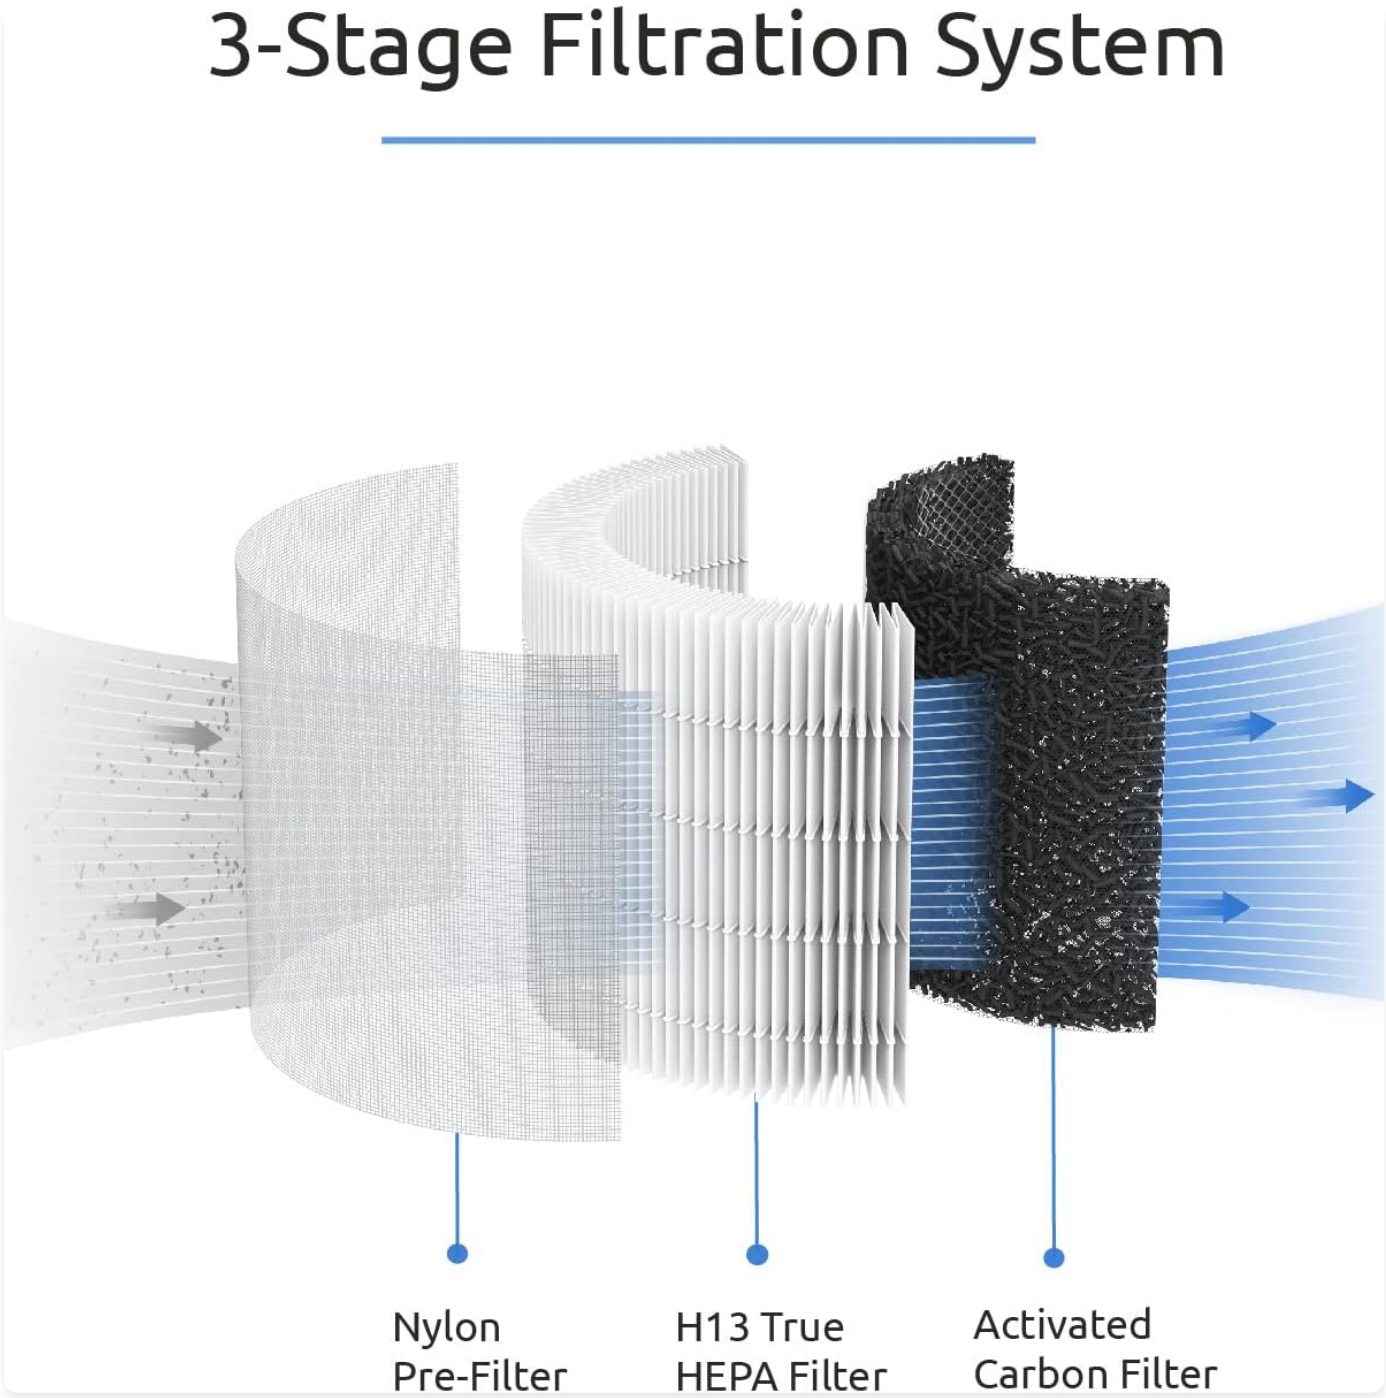


Image: An exploded diagram illustrates the three layers of the filtration system: a Nylon Pre-Filter, an H13 True HEPA Filter, and an Activated Carbon Filter, showing the air flow through each stage.

The 3-stage filtration system includes:

- **Nylon Pre-Filter:** Captures large particles like dust, lint, and pet fur.
- **H13 True HEPA Filter:** Traps 99.97% of airborne particles as small as 0.3 microns, such as pollen, pet dander, and smoke.
- **Activated Carbon Filter:** Absorbs odors from cooking, pets, and smoke.

3.2 Control Panel



Image: A detailed top-down view of the air purifier's control panel, highlighting the power button, fan speed settings, sleep mode, timer options (2/4/8 hours), and the filter replacement indicator.

The touch control panel features:

- **Power Button:** Turns the unit on or off.

- **Fan Speed Button:** Cycles through Sleep, Low, Medium, and High fan speeds.
- **Sleep Mode Button:** Activates the quietest operation mode (22dB).
- **Timer Button:** Sets the operating time for 2, 4, or 8 hours.
- **Filter Replacement Indicator:** Lights up when the filter needs to be replaced.

4. Setup

4.1 Unpacking

Carefully remove the air purifier from its packaging. Ensure all components are present: the air purifier unit and the filter (usually pre-installed but sealed).

4.2 Filter Installation

The filter comes sealed in plastic for freshness. It must be unwrapped before first use.

1. Unscrew the machine base counter-clockwise to remove it.
2. Remove the sealed filter from inside the unit.
3. Remove all packaging from the filter.
4. Insert the unwrapped filter back into the unit.
5. Screw the machine base back on clockwise until secure.

4.3 Placement

Place the air purifier on a firm, level surface. Ensure there is at least 6 inches (15 cm) of clearance on all sides for optimal air circulation. Avoid placing it near heat sources, in direct sunlight, or in areas with high humidity.

5. Operation

5.1 Power On/Off

Plug the power cord into a standard electrical outlet. Touch the Power Button on the control panel to turn the air purifier on or off.

5.2 Adjusting Fan Speed

Touch the Fan Speed Button to cycle through the available fan speeds: Sleep, Low, Medium, and High. Select the speed that best suits your needs.

5.3 Sleep Mode

Touch the Sleep Mode Button to activate the quietest setting. In this mode, the fan operates at its lowest speed, and display lights dim for undisturbed rest.

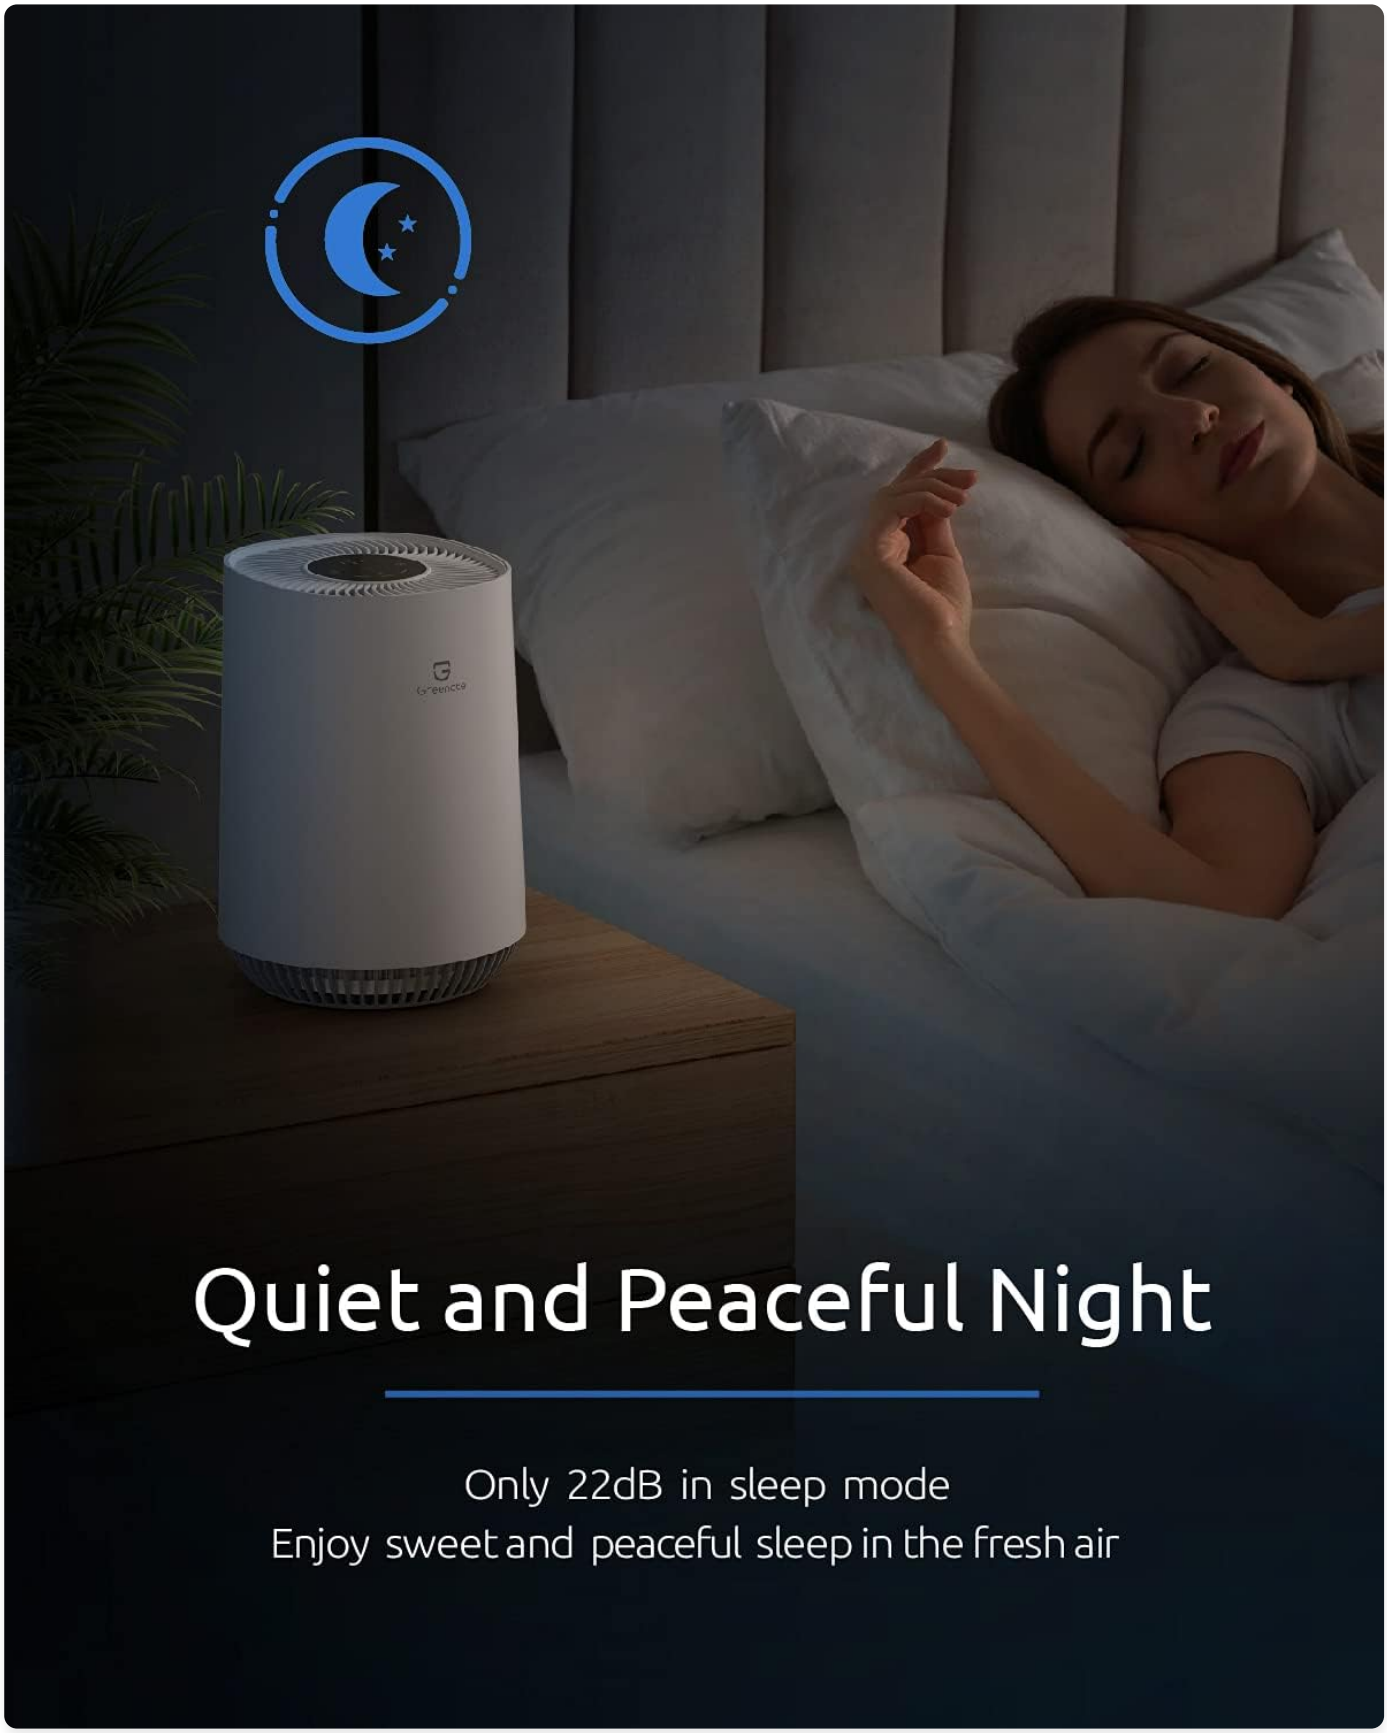


Image: The Greenote AP10 Air Purifier is positioned on a bedside table in a dimly lit bedroom, illustrating its quiet operation during sleep with a moon and stars icon above it.

5.4 Timer Function

Touch the Timer Button to set the air purifier to operate for a specific duration: 2, 4, or 8 hours. The unit will automatically turn off once the set time has elapsed.

6. Maintenance

6.1 Filter Replacement

The Filter Replacement Indicator will illuminate when it is time to replace the filter. The filter typically lasts 6-8 months depending on usage and air quality. Replacement filters can be found by searching for "B0943P26G2" on Amazon.

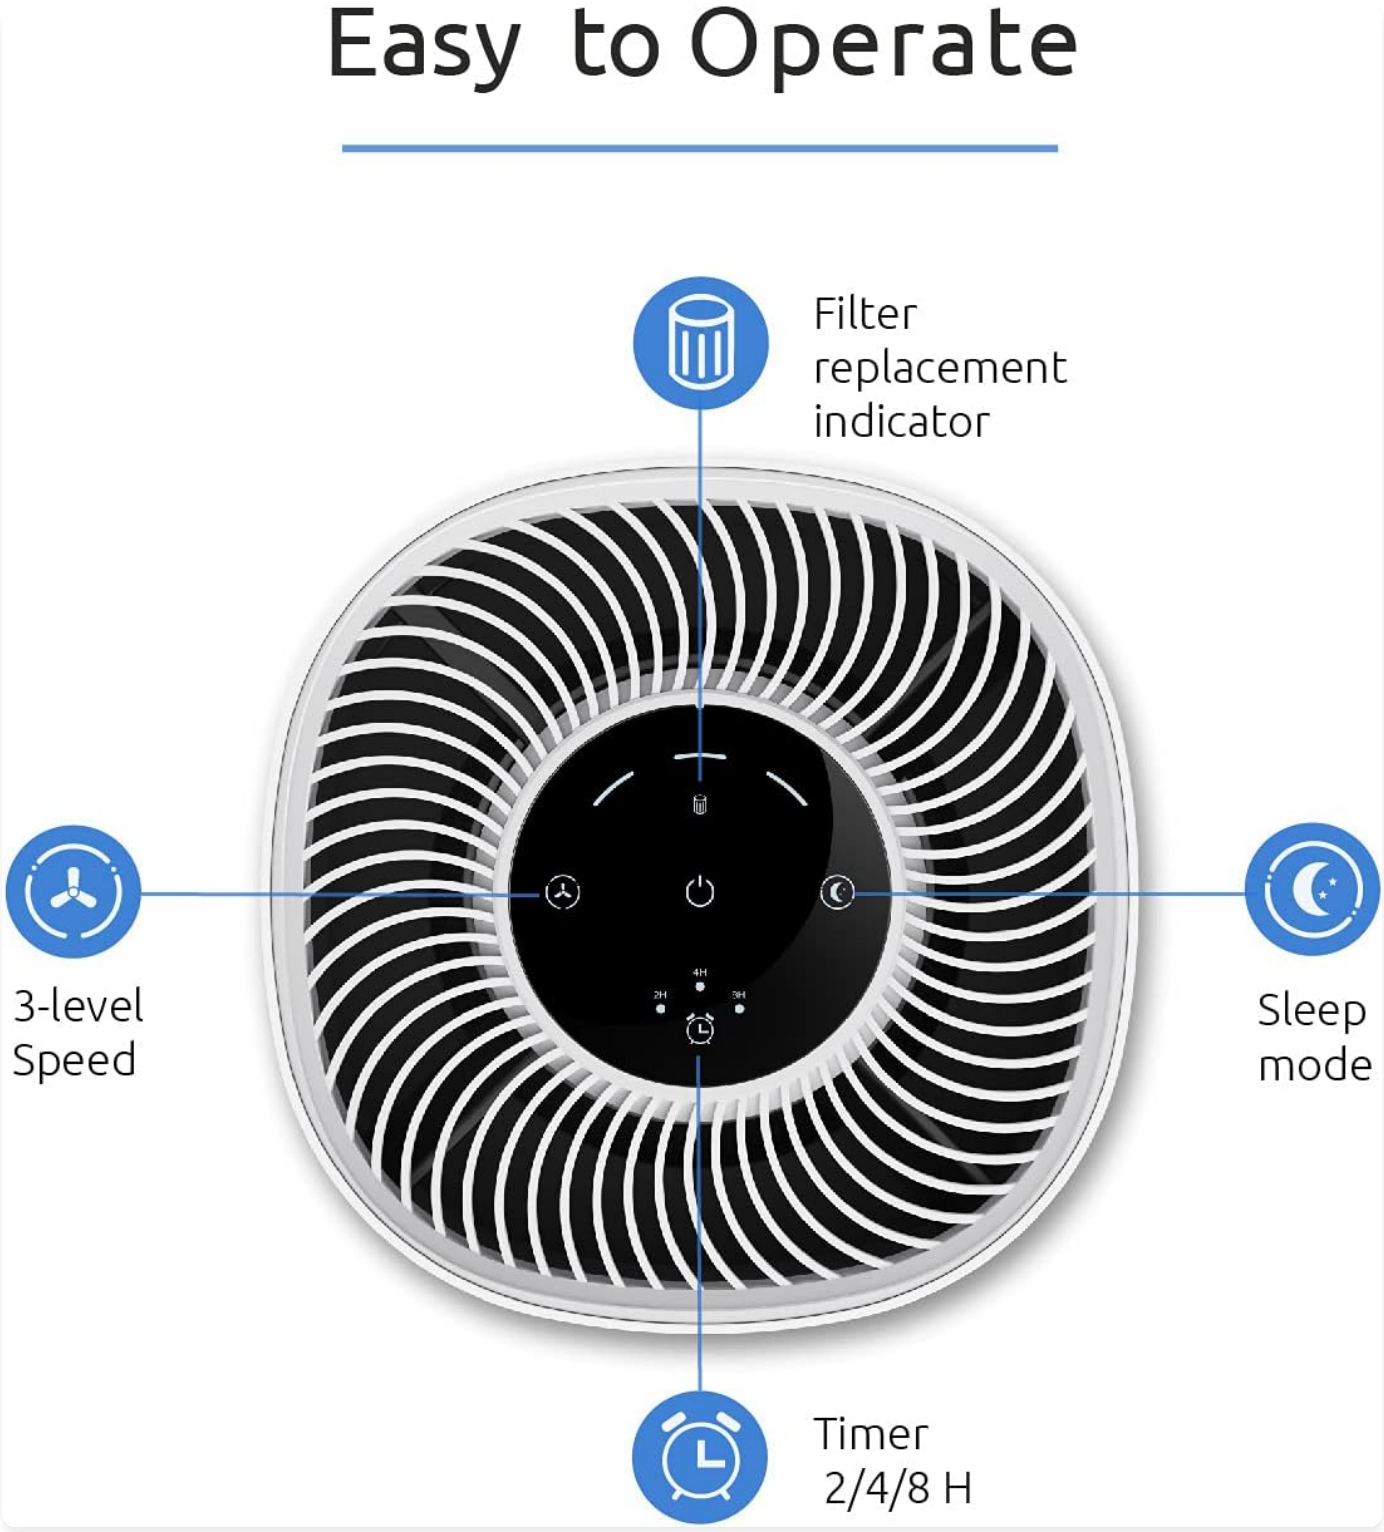


Image: A four-step visual guide demonstrates how to replace the filter: 1. Unscrew the base, 2. Remove the old filter, 3. Insert the new filter, 4. Press the filter indicator to reset.

1. Unplug the air purifier.
2. Unscrew the machine base counter-clockwise.

3. Carefully remove the old filter.
4. Insert the new filter into the unit.
5. Screw the machine base back on clockwise until secure.
6. Plug in the air purifier. Press and hold the Filter Replacement Indicator button for 3 seconds to reset the filter life counter.

6.2 Cleaning the Exterior

Wipe the exterior of the air purifier with a soft, dry cloth. Do not use abrasive cleaners or solvents. Ensure the unit is unplugged before cleaning.

7. Troubleshooting

Problem	Possible Cause	Solution
Unit does not turn on.	Power cord not securely plugged in. Filter not installed correctly or plastic wrapping not removed.	Ensure the power cord is firmly plugged into a working outlet. Check that the filter is unwrapped and correctly seated, and the base is securely screwed on.
Reduced airflow or purification efficiency.	Filter is dirty or clogged. Air inlets/outlets are blocked.	Replace the filter (refer to Section 6.1). Ensure nothing is obstructing the air intake or outlet vents.
Unusual noise (e.g., whistling, rattling).	Filter not seated properly. Foreign object inside the unit.	Unplug the unit, remove and re-install the filter to ensure it is seated correctly. Check for any foreign objects inside the unit. If the noise persists, contact customer support.
Filter Replacement Indicator remains lit after filter change.	Filter life counter not reset.	After replacing the filter, press and hold the Filter Replacement Indicator button for 3 seconds until the light turns off.

8. Specifications

Feature	Detail
Model Number	AP10
Brand	Greenote
Product Dimensions	7.68 x 9.25 x 14.37 inches
Item Weight	5.5 Pounds
Control Method	Touch

Feature	Detail
Filter Type	H13 True HEPA Filter (3-in-1)
Coverage Area	Up to 430 sq. ft. (40m²)
Noise Level (Sleep Mode)	22dB
Timer Options	2, 4, 8 hours
Certifications	CARB, FCC, ETL Listed

9. Warranty and Support

Greenote is committed to providing high-quality products and customer service.

- **Money Back Guarantee:** Enjoy a 60-day money-back guarantee.
- **Warranty:** The product comes with a warranty of up to 72 months.
- **Customer Service:** 24/7 rapid response service is available for any inquiries or issues.



Image: An infographic detailing Greenote's customer service policy, including 24/7 rapid response, 60-day money-back guarantee, up to 72 months warranty, and fast shipping.

For further assistance or to purchase replacement filters, please visit the Greenote official website or contact customer support.

10. Product Video

Your browser does not support the video tag.

Video: An official product video demonstrating the features and benefits of the Greenote AP10 Air Purifier.

© 2023 Greenote. All rights reserved.

Ask a question about this manual

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. Privacy details.

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question