

LEMEGA IR1

LEMEGA IR1 Portable Smart Radio User Manual

Model: IR1

1. INTRODUCTION

The LEMEGA IR1 is a versatile portable smart radio offering a wide range of listening options. It supports Internet Radio via Wi-Fi, DAB/DAB+ digital radio, and traditional FM radio. Additionally, it features Bluetooth connectivity for wireless audio streaming, dual alarms, and a sleep timer. This manual provides essential information for setting up, operating, and maintaining your device.

2. PRODUCT OVERVIEW

2.1 Package Contents

- LEMEGA IR1 Portable Smart Radio
- AC Power Adapter
- User Manual



Figure 2.1: LEMEGA IR1 package contents, including the radio, power adapter, and user manual.

2.2 Device Components and Controls

Familiarize yourself with the main components and controls of your LEMEGA IR1 radio.


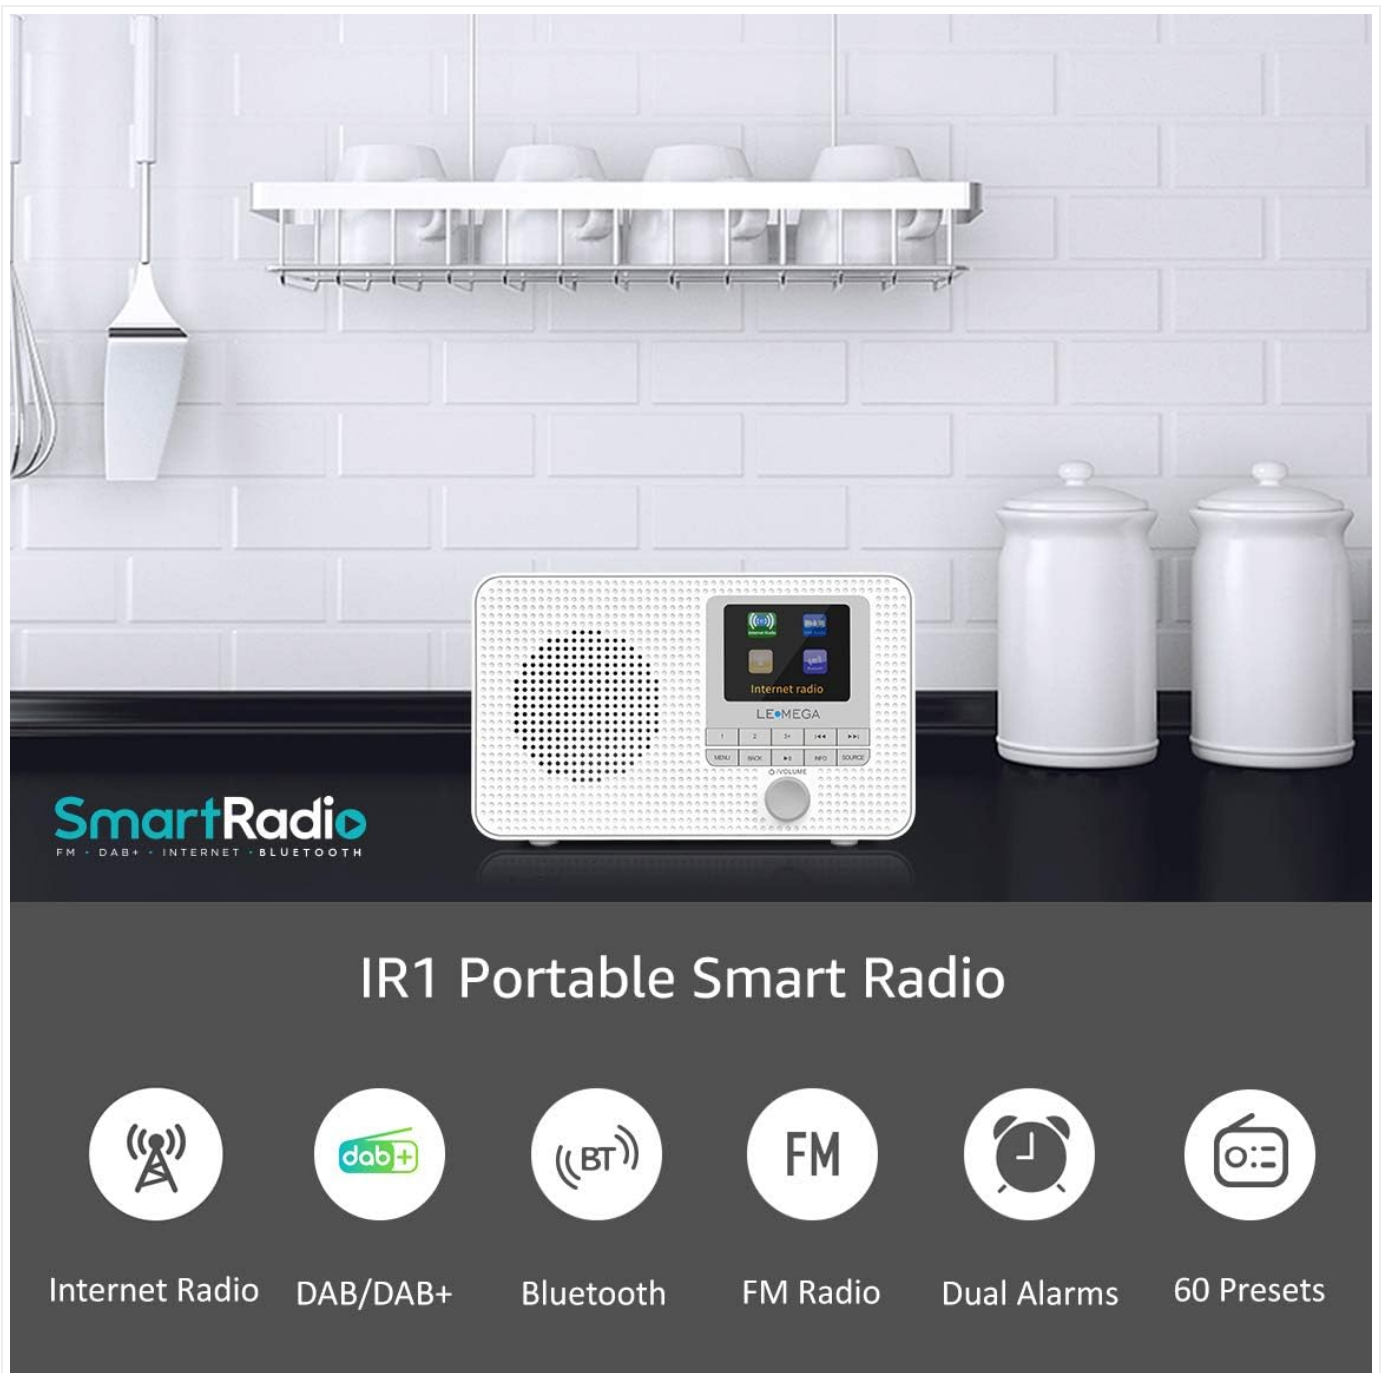


Figure 2.2: Front view of the LEMEGA IR1 Portable Smart Radio, showcasing its key features.



Figure 2.3: Detailed view of the control panel, showing navigation buttons and the volume/power knob.

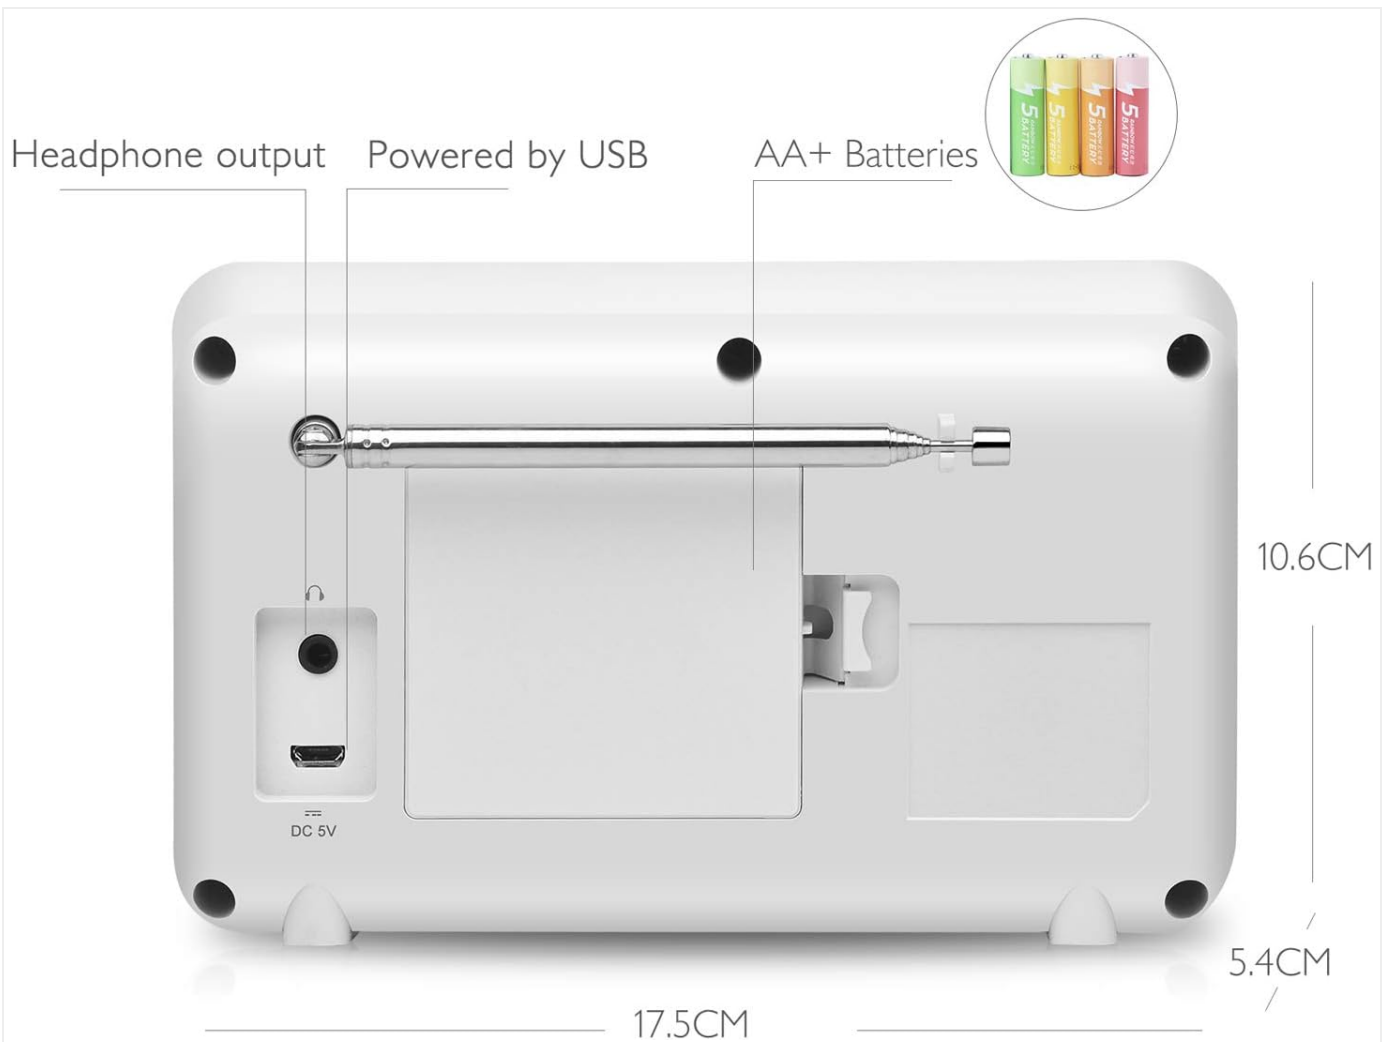

3. SETUP

3.1 Powering On the Device

The LEMEGA IR1 can be powered by the included AC adapter or by 4 AA batteries (not included) for portable use.

1. **Using AC Power:** Connect the AC power adapter to the DC 5V input port on the back of the radio and plug the adapter into a wall outlet.
2. **Using Batteries:** Open the battery compartment on the back of the radio. Insert 4 AA batteries, ensuring correct polarity. Close the compartment.
3. Press the **POWER/VOLUME** knob to turn on the radio.

3.2 Initial Configuration

Upon first use, the radio will guide you through an initial setup wizard.

1. **Language Selection:** Use the **VOLUME** knob to scroll through languages and press to confirm.
2. **Time and Date:** Set the time and date manually or allow the radio to update automatically via DAB/FM signals or network time.
3. **Network Connection (Wi-Fi):** For Internet Radio functionality, you must connect the device to a Wi-Fi network.
 - Select 'Network Wizard' or 'Scan Network'.
 - Choose your Wi-Fi network from the list.
 - Enter the Wi-Fi password using the **VOLUME** knob to select characters and the **BACK** button to delete. Press the **VOLUME** knob to confirm.
 - The radio will attempt to connect. Once connected, a Wi-Fi icon will appear on the display.

4. OPERATING MODES

Press the **SOURCE** button to switch between different operating modes.

4.1 Internet Radio

Access over 30,000 Internet radio stations from around the world.

1. Select 'Internet Radio' from the source menu.
2. You can browse stations by location, genre, or use the search function.
3. Use the **VOLUME** knob to navigate and select stations.

4.2 DAB/DAB+ Digital Radio

Enjoy high-quality digital radio broadcasts.

1. Select 'DAB Radio' from the source menu.
2. The radio will automatically scan for available DAB/DAB+ stations.
3. Use the **VOLUME** knob to scroll through the station list and select your desired station.

4.3 FM Radio

Tune into traditional FM radio stations.

1. Select 'FM Radio' from the source menu.
2. The radio will automatically scan for available FM stations.

3. Use the **VOLUME** knob to scroll through the station list or manually tune to a frequency.

4.4 Bluetooth Mode

Stream audio wirelessly from your Bluetooth-enabled devices.

1. Select 'Bluetooth' from the source menu. The radio will enter pairing mode.
2. On your external device (e.g., smartphone, tablet), enable Bluetooth and search for available devices.
3. Select 'LEMEGA IR1' from the list to pair. Once connected, you can play audio from your device through the radio.

5. FEATURES

5.1 Presets

The radio allows you to save up to 60 favorite stations (40 for DAB/FM, 20 for Internet Radio) for quick access.

1. **To Save a Preset:** While listening to a station, press and hold one of the numbered preset buttons (1, 2, 3+) until 'Preset Saved' appears on the display. For presets 4-60, press and hold the '3+' button, then use the **VOLUME** knob to select a preset number and press to confirm.
2. **To Recall a Preset:** Briefly press the corresponding numbered preset button (1, 2, 3+) to tune to the saved station.

5.2 Dual Alarms

Set two independent alarms to wake you up with your favorite station or a buzzer.

1. Press the **MENU** button and navigate to 'Alarms'.
2. Select 'Alarm 1' or 'Alarm 2'.
3. Configure the alarm time, source (Internet Radio, DAB, FM, or Buzzer), volume, and frequency (Daily, Weekdays, Weekends, Once).
4. Ensure the alarm is set to 'On'.

5.3 Sleep Timer

Set a timer for the radio to automatically turn off after a specified duration.

1. Press the **MENU** button and navigate to 'Sleep Timer'.
2. Select the desired sleep duration (e.g., 15, 30, 45, 60 minutes). The radio will turn off automatically after this time.

5.4 Headphone Output

Connect headphones to the 3.5mm jack on the back of the radio for private listening.

6. MAINTENANCE

To ensure the longevity and optimal performance of your LEMEGA IR1 radio, follow these maintenance guidelines:

- **Cleaning:** Use a soft, dry cloth to clean the radio's exterior. Do not use abrasive cleaners or solvents.
- **Battery Care:** If using batteries, remove them if the radio will not be used for an extended period to prevent leakage. Do not mix old and new batteries or different types of batteries.
- **Placement:** Avoid placing the radio in direct sunlight, near heat sources, or in areas with high humidity or dust.
- **Antenna:** Extend the telescopic antenna fully for optimal DAB/DAB+ and FM reception.

7. TROUBLESHOOTING

If you encounter issues with your LEMEGA IR1, refer to the following common problems and solutions:

Problem	Possible Cause	Solution
No power	AC adapter not connected, batteries depleted/incorrectly inserted.	Check AC adapter connection. Replace or correctly insert batteries.
No Internet Radio connection	Incorrect Wi-Fi password, weak Wi-Fi signal, router issue.	Re-enter Wi-Fi password. Move radio closer to router. Restart router.
Poor DAB/FM reception	Antenna not extended, weak signal area.	Fully extend the telescopic antenna. Reposition the radio.
Bluetooth pairing failure	Radio not in pairing mode, device too far, device already paired.	Ensure radio is in Bluetooth mode. Move devices closer. Disconnect from other devices.
No sound	Volume too low, mute activated, headphones connected.	Increase volume. Check if headphones are plugged in.

8. SPECIFICATIONS

- **Model:** IR1
- **Dimensions:** 23.2 x 12 x 7.8 cm
- **Weight:** 610 g
- **Connectivity:** Wi-Fi, Bluetooth
- **Radio Modes:** Internet Radio, DAB/DAB+, FM
- **Power Source:** DC 5V (AC adapter), 4 x AA Batteries
- **Audio Output:** Headphone Jack (3.5mm)
- **Presets:** 60 (40 DAB/FM, 20 Internet Radio)
- **Color:** White Satin

9. WARRANTY AND SUPPORT

LEMEGA products are designed for reliability and performance. This product comes with a 3-year warranty. For detailed warranty information, product support, or to register your device, please visit the official LEMEGA website:

www.lemegaaudio.com

Please retain your proof of purchase for warranty claims.

ASK A QUESTION ABOUT THIS MANUAL

Ask about setup, troubleshooting, compatibility, parts, safety, or missing instructions. Manuals+ will review the question and use this page's manual context to help answer it.

Name

Anonymous

Email

you@example.com

After a successful submission, we securely hash the supplied account or form email before sending it to Microsoft Advertising for conversion attribution. [Privacy details](#).

Question

Example: How do I reset this device or fix this error?

Details

Model number, symptoms, what you tried, or the section of the manual you are using.

Submit question

Open the live page

<https://manuals.plus/asin/B08HMTWHR2>

More documents and user manuals: <https://manuals.plus/>